

Source Water Assessment

A Hydrogeologic Susceptibility and
Vulnerability Assessment for
Sunridge Apartments Drinking Water
System,
Wasilla, Alaska

PWSID # 220228.001

DRINKING WATER PROTECTION PROGRAM REPORT #755

Alaska Department of Environmental Conservation

October, 2002

Source Water Assessment for Sunridge Apartments Drinking Water System Wasilla, Alaska PWSID# 220228.001

By Suzan J. Hill

DRINKING WATER PROTECTION PROGRAM REPORT 755

The Drinking Water Protection Program is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

	Page		Page
Executive Summary	1	Inventory of Potential and Existing	
Introduction	1	Contaminant Sources	3
Description of the Wasilla area, Alaska	1	Ranking of Contaminant Risks	4
Sunridge Apartments Public Drinking Water System	3	Vulnerability of Sunridge Apartments Drinking Water Source	4
Sunridge Apartments Protection Area	3	Summary	6
		References	7

TABLES

TABLE	1. Definition of Zones	3
	2. Susceptibility	4
	3. Contaminant Risks	4
	3. Overall Vulnerability	5

APPENDICES

APPENDIX	A. Sunridge Apartments Drinking Water Protection Area (Map 1)
	B. Contaminant Source Inventory for Sunridge Apartments (Table 1)
	Contaminant Source Inventory and Risk Ranking for Sunridge Apartments – Bacteria and Viruses (Table 2)
	Contaminant Source Inventory and Risk Ranking for Sunridge Apartments – Nitrates/Nitrites (Table 3)
	Contaminant Source Inventory and Risk Ranking for Sunridge Apartments – Volatile Organic Chemicals (Table 4)
	Contaminant Source Inventory and Risk Ranking for Sunridge Apartments – Heavy Metals, Cyanide and Other Organic Chemicals (Table 5)
	Contaminant Source Inventory and Risk Ranking for Sunridge Apartments – Synthetic Organic Chemicals (Table 6)
	Contaminant Source Inventory and Risk Ranking for Sunridge Apartments – Other Organic Chemicals (Table 7)
	C. Sunridge Apartments Drinking Water Protection Area and Potential and Existing Contaminant Sources (Maps 2-4)
	D. Vulnerability Analysis for Contaminant Source Inventory and Risk Ranking for Sunridge Apartments Public Drinking Water Source (Charts 1 – 14)

Source Water Assessment for Sunridge Apartments Source of Public Drinking Water, Wasilla, Alaska

By Suzan J. Hill

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The public water system for Sunridge Apartments is a Class A (community) water system consisting of one well in the Wasilla, Alaska area. Identified potential and current sources of contaminants for Sunridge Apartments public drinking water source include sewer lines, roads, gasoline stations, motor vehicle repair shops, underground fuels tanks, closed leaking underground storage tanks, medical facilities, a funeral home, and a variety of other businesses. These identified potential and existing sources of contamination are considered sources of bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, synthetic organic chemicals and other organic chemicals. Overall, the public water source for Sunridge Apartments received a vulnerability rating of **Medium** for bacteria and viruses, nitrates and nitrites, volatile organic chemicals, other organic chemicals, and synthetic organic chemicals; and **High** for heavy metals.

INTRODUCTION

The Alaska Department of Environmental Conservation (ADEC) is completing source water assessments for all public drinking water sources in the State of Alaska. The purpose of this assessment is to provide public water system owners and/or operators, communities, and local governments with information they can use to preserve the quality of Alaska's public drinking water supplies. The results of this source water assessment can be used to decide where voluntary protection efforts are needed and feasible, and also what efforts will be most effective in reducing contaminant risks to your water system.

This source water assessment combines a review of the natural conditions at the site and the potential and existing contaminant risks. These are combined to determine the overall vulnerability of the drinking water source to contamination.

DESCRIPTION OF THE WASILLA AREA, ALASKA

Location

Wasilla is located near the center of the Matanuska-Susitna (Mat-Su) Borough in south central Alaska. The Mat-Su Borough encompasses approximately 23,000 square miles, including the majority of the drainage of the Susitna and Matanuska Rivers. Wasilla is located south of the Talkeetna Mountains, about 12 miles north of Knik Arm on Cook Inlet (Wickersham Alaska Corporation, 1986), (Matanuska-Susitna Borough/Fran Seager, 1991). Wasilla is 30 air miles north/northeast of Anchorage, adjacent to the Alaska Railroad main line and the George Parks Highway (ADNR, 1981).

Climate

The climate in Wasilla is transitional between the extremes of Interior Alaska and the wet conditions found along the coastal areas.

Wasilla is less than 15 miles from Knik Arm and about 75 miles from Prince William Sound. Summer temperatures are more moderate than those in the Interior due to the proximity to the coast. The Chugach and Talkeetna Mountains and the Alaska Range also protect Wasilla from the frigid cold of the Interior Alaska winter and act to break up strong storm fronts (Brabets, 1997), (Western Regional Climate Center, 2000).

Wasilla averages about 18 inches of precipitation per year, including about 59 inches of snowfall. Winter thaws can decrease snow cover to a few inches. Mean monthly high temperatures in Wasilla range from about 22 degrees in December and January to 69 degrees in July. The frost-free period in spring and summer averages 115 days, with the first frost usually arriving by September 1.

The record low for Wasilla was -50 degrees in January 1947. The highest recorded temperature was 90 degrees in 1969 (*Wickersham Alaska Corporation, 1986*).

Topography and Drainage

The Wasilla area topography varies from about 300 feet to 500 feet above sea level. The surrounding terrain gradually rises from south to north. The Wasilla area has hundreds of small lakes, several large lakes, and two substantial streams. At 387 acres, *Wasilla Lake* is one of the largest lakes in Southcentral Alaska (*Renshaw Consulting Engineers, 1983*).

The Cottonwood Creek drainage system, of which Wasilla Lake is part, begins northeast of Wasilla and discharges into Knik Arm about 15 miles to the south.

Cottonwood Creek is a popular salmon fishing stream (outside city limits), and has an average rate of flow of about 16 cubic feet per second near the outfall from Wasilla Lake.

At 362 acres, *Lake Lucille* is slightly smaller than Wasilla Lake. However, although within close proximity, they are part of two separate drainages and have significantly different characteristics. Lake Lucille is shallow with an average depth of five and a half feet. Its primary water source is springs in the lake bed. No significant creek leads into it and Lucille Creek is a low flow stream that drains it into Big Lake. Water circulation and flushing action through the lake is slow.

Although the quality can vary significantly in a short distance, groundwater supplies are abundant in the area. The Wasilla area has a central water system, and several subdivisions have private water systems. Many homes and businesses in the area, however, rely on individual wells for their water supply. Most of these wells are shallow with depths of less than 100 feet. Static water levels in many of these wells is around 30 feet below the surface. The coarse gravel underlying the Wasilla area provides a large aquifer even in the winter when infiltration is low (*Trainer, 1953*).

Geology and Soils

A lake covered the Susitna River valley lowland during glacial times. The deposition of glacial silts and clays played an important part in the make up of the soils of the area.

Most of the soils in the area provide good sources of sand, gravel and topsoil. The deposition of silt, clay

and organic muck in old lakes and depressions means that some areas have soil conditions that vary over relatively short distances. The U.S. Soil Conservation Service has mapped seven soil associations in and around Wasilla.

The Homestead and Knik soil types predominate the Wasilla area, with smaller areas of Coal Creek, Jacobsen, Salamatof, and Slikok soil types.

The *Homestead* series is common in the Wasilla area especially north of the Parks Highway from the west end of Lake Lucille. Homestead soils are shallow, well-drained silty soils over loose sand and gravel. They have formed on broad out wash plains and gravel moraines and run from nearly flat terrain to steep areas.

Homestead series is prevalent along Church Road north of the Parks Highway and throughout the Mission Hills subdivision.

The *Knik* series is the other major soil type in the area. It includes most of the downtown area, north and south of Lake Lucille and Wasilla Lake.

Knik soils are shallow, well-drained and silty, overlaying coarse, gravelly material, although scattered areas of poorly drained soils are also included. The soils are extensive over a broad range of slopes from flat to steep escarpments.

The *Coal Creek* series consists of dark-colored, poorly drained soils that formed in moderately deep silty material over compacted, fine-textured sediments. These soils occur in nearly level to gently sloping stream valleys, on the border of muskegs, and in small depressions. They are sometimes characterized by hillside seeps. This soil unit is found in small areas north and west of the downtown area.

The *Jacobsen* series is a very poorly drained, very stony silt loam found in broad depressions. The type is found west of Lake Lucille, south of the railroad, about even with Church Road.

The *Salamatof* and *Slikok* series are found within low areas and consist of poorly drained, peat, muck, and silty sediments in shallow depressions throughout the eastern side of the city. High water tables, often at or just below the surface, are characteristics of these soils. The banks of Cottonwood Creek south of Wasilla Lake have the greatest concentrations of these soils.

Finally, the *Wasilla* series consists of somewhat poorly drained soils with layers of sand and compacted finer material. They do not have the high organic content of

the Slikok series. These soils are not extensive in the local area and are most commonly found southeast of Lake Lucille along the Knik-Goose Bay Road (*Wickersham Alaska Corporation, 1986*).

SUNRIDGE APARTMENTS PUBLIC DRINKING WATER SYSTEM

Sunridge Apartments is a Class A (community) water system. The system consists of one well and is located at Glennwood Avenue and Knik Goose Bay (See Map 1 of Appendix A). This area is at an elevation of approximately 100 feet above sea level.

According to the Well Log, there is top soil from 0 to 2 feet, gravel from 2 to 25 feet; hardpan from 25 to 35 feet; clay and gravel from 35 to 57 feet; hardpan from 57 to 82 feet; gravel and water from 82 to 86 feet; gravel and clay from 86 to 89 feet; and water, gravel and sand from 89 feet to a total well depth of 100 feet . The well was drilled on 8/25/77 and had a static water level of 31 feet. The Sanitary Survey (4/16/01) indicates the well was installed with a cap providing a sanitary seal. A properly installed sanitary seal may provide protection against contaminants from entering the source waters at the well casing. The land surface is also appropriately sloped away from the well providing adequate surface water drainage. The well is not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants travelling along the well casing and into source waters.

This system operates year-round and serves 100 residents through 3 service connections.

SUNRIDGE APARTMENTS WELL DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. Some areas are more likely to allow contamination to reach the well than others. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the Drinking Water Protection Area (DWPA). Because releases of contaminants within the DWPA are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts. (Please refer to the Guidance Manual for Class A Public Water Systems for additional information).

The DWPA's established for wells by the ADEC are separated into four zones. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well. An analytical calculation was used to determine the size and shape of the DWPA. The input parameters describing the attributes of the aquifer in this calculation were adopted from the U.S. Geological Survey (Patrick, Brabets, and Glass, 1989), and State of Alaska Department of Water Resources (Jokela et. al., 1991).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four DWPA zones and the calculated time-of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¼ the distance for the 2-yr. TOT
B	Less than the 2 year TOT
C	Less Than the 5 year TOT
D	Less than the 10 year TOT

As an example, water moving through the aquifer in Zone B will reach the well in less than 2 years from the time it crosses the outer limit of Zone B.

Zone A also incorporates the area down-gradient from the well to take into account the area of the aquifer that is influenced by pumping of the well. Water within the aquifer in Zone A will reach the well in several hours to several months.

The DWPA for the Sunridge Apartments contain four zones: Zone A, Zone B, Zone C, and Zone D (see Map 1 in Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Sunridge Apartment’s DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class A public water system assessments, six categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites;
- Volatile organic chemicals
- Heavy metals, cyanide, and other inorganic chemicals,
- Synthetic organic chemicals, and
- Other organic chemicals.

The sources are displayed on Maps 2 and 3 of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a “potential” or “existing” source of contamination is a function of toxicity and volumes of specific contaminants associated with that source.

Tables 2 through 7 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, synthetic organic chemicals, and other organic chemicals.

VULNERABILITY OF SUNRIDGE APARTMENTS DRINKING WATER SOURCE

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Each of the six categories of drinking water contaminants has been analyzed and an overall vulnerability score of 0 to 100 is ultimately assigned:

$$\begin{array}{r}
 \text{Natural Susceptibility (0 – 50 points)} \\
 + \\
 \text{Contaminant Risks (0 – 50 points)} \\
 = \\
 \text{Vulnerability of the} \\
 \text{Drinking Water Source to Contamination (0 – 100).}
 \end{array}$$

A score for the Natural Susceptibility is achieved by analyzing the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points)

$$\begin{array}{r}
 + \\
 \text{Susceptibility of the Aquifer (0 – 25 Points)} \\
 = \\
 \text{Natural Susceptibility (Susceptibility of the Well)} \\
 \text{(0 – 50 Points)}
 \end{array}$$

The well for Sunridge Apartments is completed in a confined aquifer setting. The aquifer that is utilized by the well is protected from surface contamination by approximately 25 feet of relatively impermeable hardpan. Table 2 shows the Susceptibility scores and ratings for Sunridge Apartments.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the Wellhead	5	Low
Susceptibility of the Aquifer	14	Medium
Natural Susceptibility	19	Medium

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This data has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	25	Medium
Nitrates and/or Nitrites	27	Medium
Volatile Organic Chemicals	32	High
Heavy Metals, Cyanide, and Other Inorganic Chemicals	50	Very High
Synthetic Organic Chemicals	22	Medium
Other Organic Chemicals	32	High

Appendix D contains fourteen charts, which together form the ‘Vulnerability Analysis’ for a source water assessment for a public drinking water source. Chart 1 analyzes the ‘Susceptibility of the Wellhead’ to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the ‘Susceptibility of the Aquifer’ to contamination by looking at the naturally occurring attributes of the water

source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes ‘Contaminant Risks’ for the drinking water source with respect to bacteria and viruses. The ‘Contaminant Risks’ portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the ‘Vulnerability Analysis for Bacteria and Viruses’. Charts 5 through 14 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites, volatile organic chemicals, heavy metals, synthetic organic chemicals, and other organic chemicals, respectively.

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the six categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	45	Medium
Nitrates and Nitrites	45	Medium
Volatile Organic Chemicals	50	Medium
Heavy Metals, Cyanide and Other Inorganic Chemicals	70	High
Synthetic Organic Chemicals	40	Medium
Other Organic Chemicals	50	Medium

Bacteria and Viruses

The contaminant risk for bacteria and viruses is medium with sewer lines and roads presenting the most significant risk to the drinking water well (See Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Recent sampling of Sunridge Apartments shows no detection of Bacteria and Viruses. After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is medium.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is medium with sewer lines and an industrial injection well posing the most significant contaminant risk to this source of public drinking water (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). Nitrates are very mobile, moving at approximately the same rate as water.

Sampling history for Sunridge Apartments well indicates that low concentrations of nitrate have been

detected. At the latest sampling period, a low concentration of nitrate and/or nitrite was detected at 0.321 mg/L or 3% of the Maximum Contaminant Level (MCL) of 10mg/L. The MCL is the maximum level of contaminant that is allowed to exist in drinking water and still be consumed by humans without harmful health effects.

It is unknown how much of the existing nitrate concentration can be attributed to natural or human-made sources. Nitrate concentrations in uncontaminated groundwater are typically less than 2 milligrams per liter (mg/L) and are derived primarily from the decomposition of organic matter in soils [Wang, Strelakos, Jokela, 2000].

After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to contamination is medium.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is high with gasoline stations and motor vehicle waste disposal wells presenting the most significant risk to the drinking water well (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D). Recent sampling history of Sunridge Apartments did not detect any chemicals in the Volatile Organic Chemicals category. After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is medium.

Heavy Metals, Cyanide, and Other Inorganic Chemicals

The contaminant risk for heavy metals is very high with motor vehicle repair shops, motor vehicle waste disposal wells and a welding shop presenting the most significant risk to the drinking water well (See Chart 9 – Contaminant Risks for Heavy Metals, Cyanide, and Other Inorganic Chemicals in Appendix D). Monitoring samples analyzing chemicals within the Heavy Metals, Cyanide and Other Inorganic Chemicals collected on 1/3/02 showed a concentration of arsenic – 23.1 mg/L or 46% of the MCL. Arsenic can be the result of natural deposit erosion, runoff from orchards or runoff from glass and electronics production wastes. The potential health effects from concentrations of arsenic include skin damage, problems with the circulatory system and possible increased risk of cancer. Small amounts of barium and chromium were also detected.

After combining the contaminant risk for heavy metals, cyanide, and other inorganic chemicals with the natural

susceptibility of the well, the overall vulnerability of the well to contamination is high.

Synthetic Organic Chemicals

The contaminant risk for synthetic organic chemicals is medium with a golf course and dye manufacturing company representing the most significant risk. After combining the contaminant risk with the natural susceptibility of the well, the overall vulnerability to synthetic organic chemicals of the well is medium.

Other Organic Chemicals

The contaminant risk for other organic chemicals is high with an industrial injection well and motor vehicle waste disposal well within the DWPA representing the most significant risk. After combining the contaminant risk with the natural susceptibility of the well, the overall vulnerability to other organic chemicals of the well is medium.

Review of the historical sampling data indicates that no synthetic organic chemicals or other organic chemicals were detected in Sunridge Apartments' drinking water the last time it was sampled (See Charts 11 and 13 – Contaminant Risks for Synthetic Organic Chemicals and Other Organic Chemicals in Appendix D, respectively).

SUMMARY

A *Source Water Assessment* has been completed for the sources of public drinking water serving Sunridge Apartments. Overall, the public water source for Sunridge Apartments received a vulnerability rating of **Medium** for bacteria and viruses, nitrates and nitrites, volatile organic chemicals, other organic chemicals, and synthetic organic chemicals; and **High** for heavy metals.

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of Sunridge Apartments to protect public health. It is anticipated that *Source Water Assessments* will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of Sunridge Apartments public drinking water source.


REFERENCES

- Alaska Department of Natural Resources, 1981, Scenic Resources along the Parks Highway, Anchorage, AK
- Alaska Department of Transportation and Public Facilities, 1990, Parks Highway Reconnaissance Report, Anchorage, AK.
- Alaska Department of Transportation and Public Facilities, 1992, Wasilla-Fishhook Road Environmental Assessment, Anchorage, AK.
- Brabets, T., 1997, Precipitation map of Alaska, Web extension to the U.S. Geological Survey Water Resources for Alaska GIS datasets. <URL:<http://agdc.usgs.gov/data/usgs/water>> .
- Dearborn, L.L., and Alleley, R.D., 1983, Water-well data for the Big Lake area, Anchorage C8-SW Quadrangle, Alaska; Division of Geological and Geophysical Surveys Report of Investigations 83-19, State of Alaska Department of Natural Resources, Fairbanks, AK.
- Jakola, J.B., Munter, J.A., and Evans, J.G., 1991, Ground-water resources of the Palmer-Big Lake area, Alaska: a conceptual model. Division of Geological and Geophysical Surveys Report of Investigations 90-4, State of Alaska Department of Natural Resources, Fairbanks, AK.
- LaSage, D.M., 1992, Ground-water resources of the Palmer area, Alaska, Division of geological and Geophysical Surveys Report of Investigations 92-3, State of Alaska Department of Natural Resources, Fairbanks, AK.
- Matanuska-Susitna Borough/Fran Seager, 1991, Major Coal Towns of the Matanuska Valley: A Pictorial History, Palmer, AK.
- Matanuska-Susitna Borough, 1985, Knik-Matanuska-Sisitna: A Visual History of the Valleys, Wasilla, AK.
- Maynard, D.L., 1987, Water-well data from the Houston area, Matanuska-Susitna Borough, Alaska, Division of Geological and Geophysical Surveys Report of Investigations 87-17, 14p., State of Alaska Department of Natural Resources, Fairbanks, AK.
- Patrick, L.D., Brabets, T.P., and Glass, R.L., 1989, Simulation of ground-water flow at Anchorage, Alaska: US Geological Survey Water-Resources Investigations Report 88-4139, 41p.
- Renshaw Consulting Engineers, 1983, Summary of Mineral Resources, Palmer, AK.
- Trainer, F.W., 1953, Preliminary report on the geology and groundwater resources of the Matanuska Valley agricultural area, Alaska, USGS Water Supply Paper 1494, U.S. Printing Office, Washington, D.C.
- Western Regional Climate Center, 2000, August 24, Web extension to the *Western Regional Climate Center* [WWW document]. URL http://www.uaa.alaska.edu/enri/ascc_web/ascc_home.html .
- Wickersham Alaska Corporation, 1986, Wasilla Comprehensive Plan, Anchorage, AK.
- Winkler, G.R., 1992, Geologic map and summary geochronology of the Anchorage 1° x 3° quadrangle, Southern Alaska, US Geological Survey MAP I-2283, U.S. Government Printing Office, Washington D.C.

APPENDIX A


Sunridge Apartments Well #1 Drinking Water Protection Area Location Map (Map 1)

Sunridge Apartments Drinking Water Protection Area - PWS #220228.001

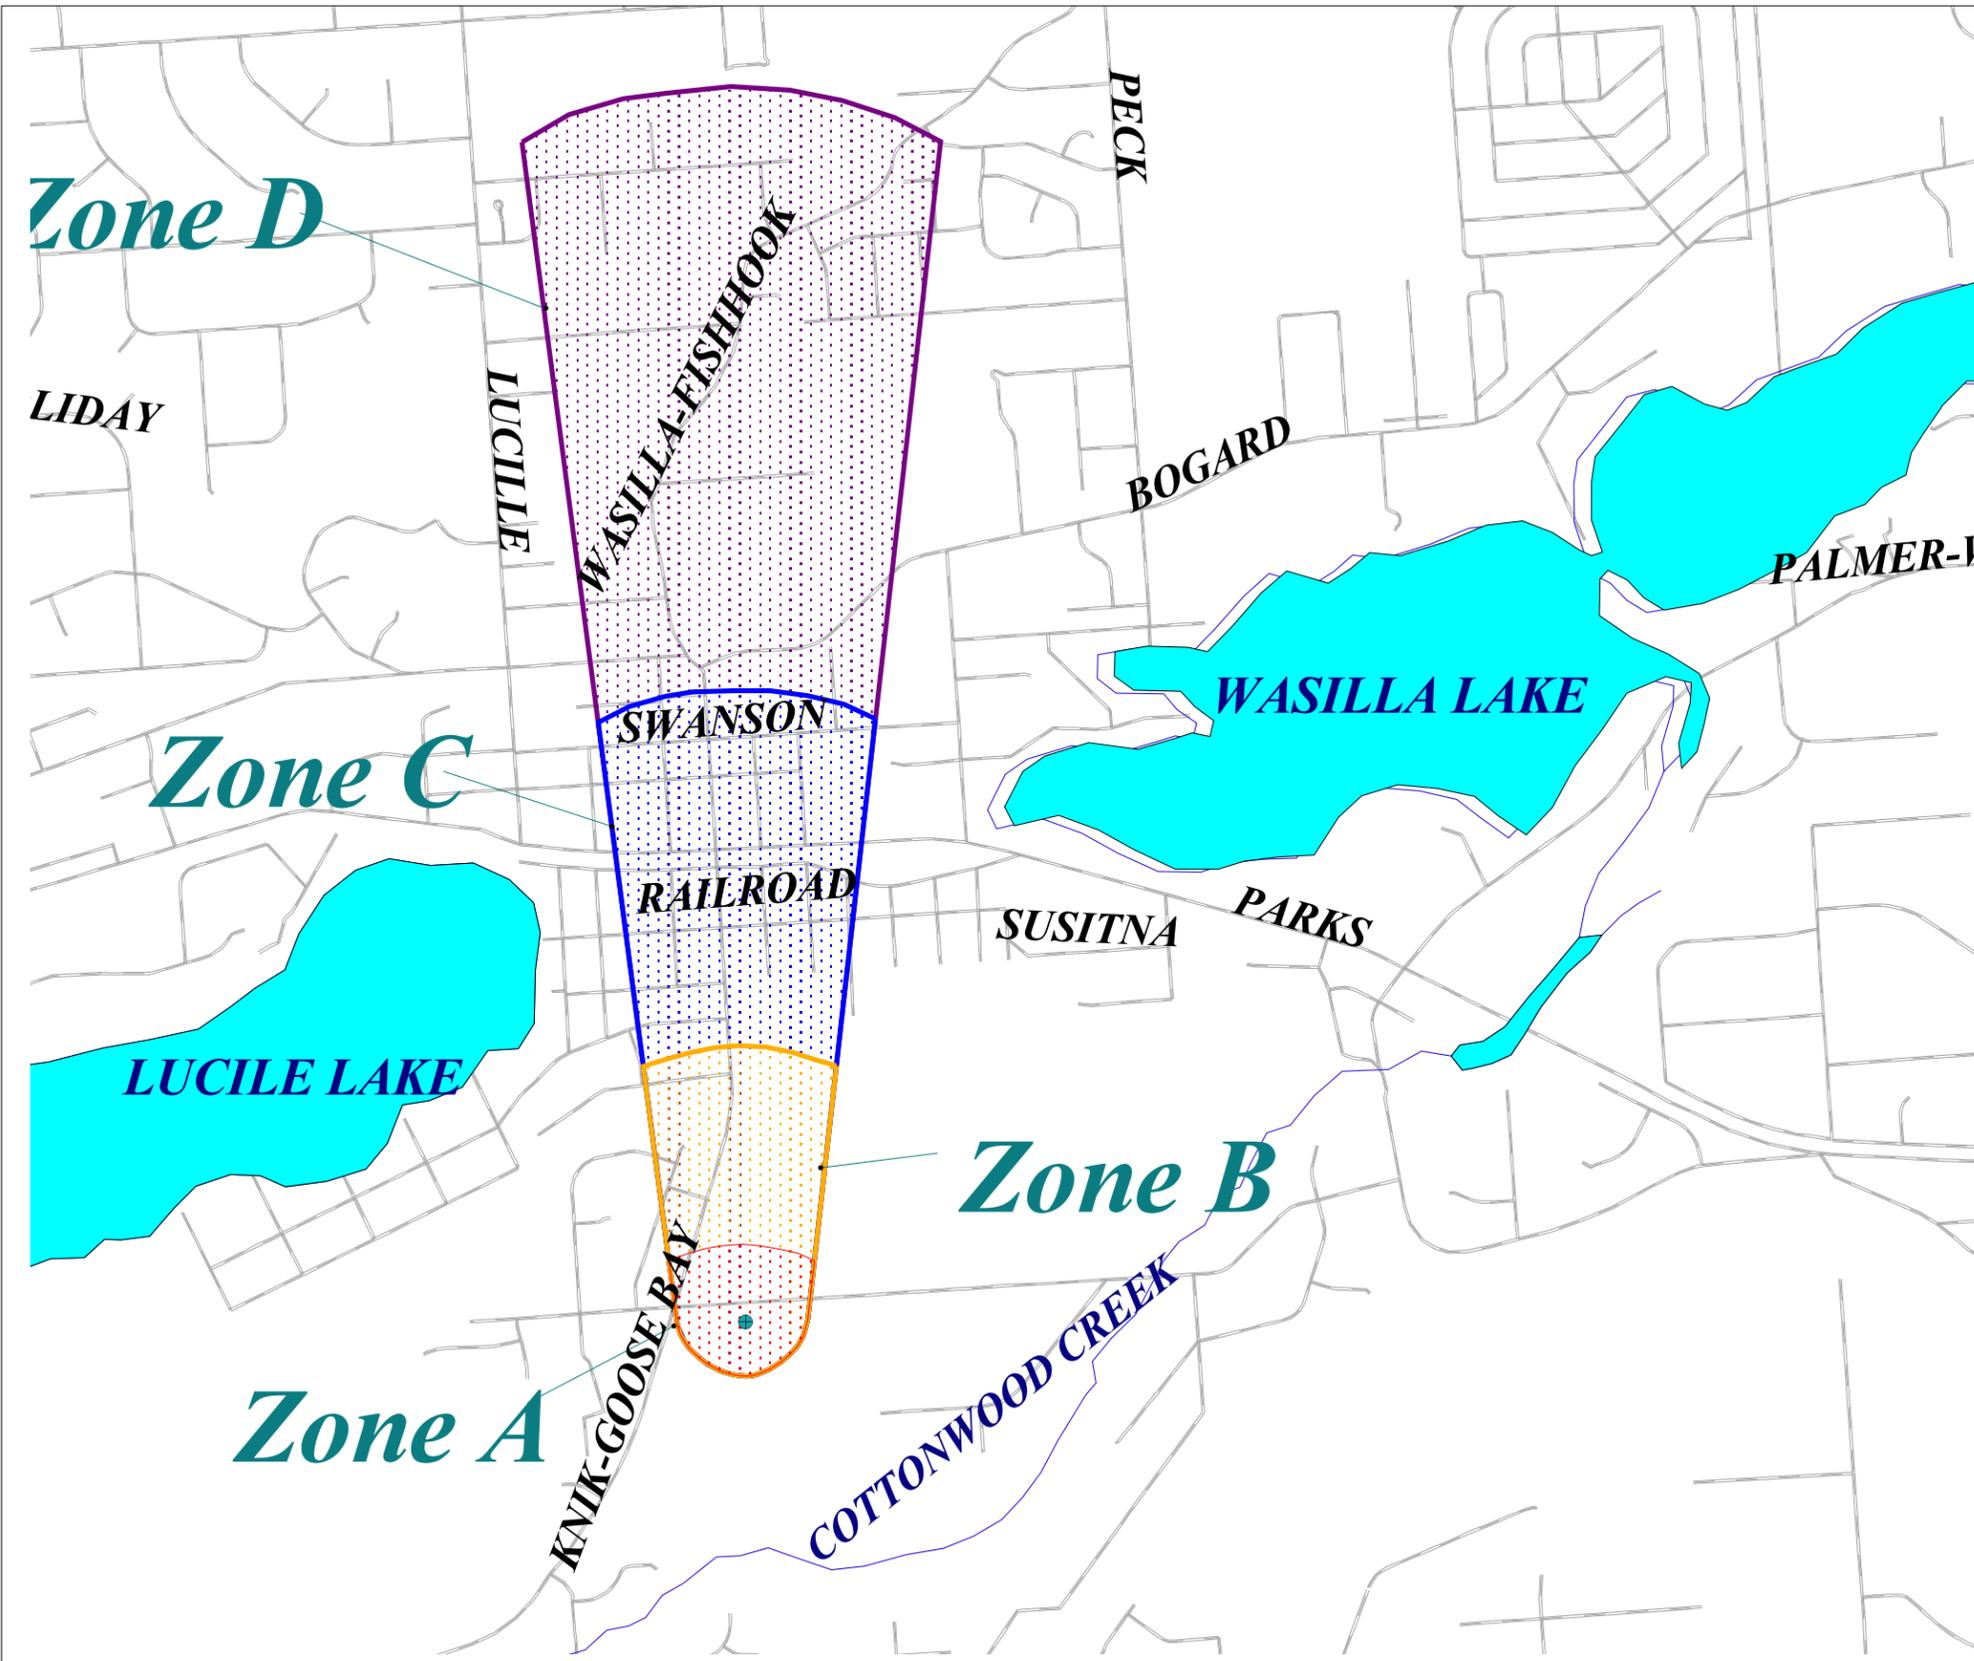


Legend

- Sunridge Apartments Well Location
- Zone A
 - ▨ Several Months Travel Time
- Zone B
 - ▨ Less Than Two Years Time of Travel
- Zone C
 - ▨ Less Than Five Years Time of Travel
- Zone D
 - ▨ Less Than Ten Years Time of Travel
- ▭ Lakes
- ▭ Rivers
- ▭ Roads

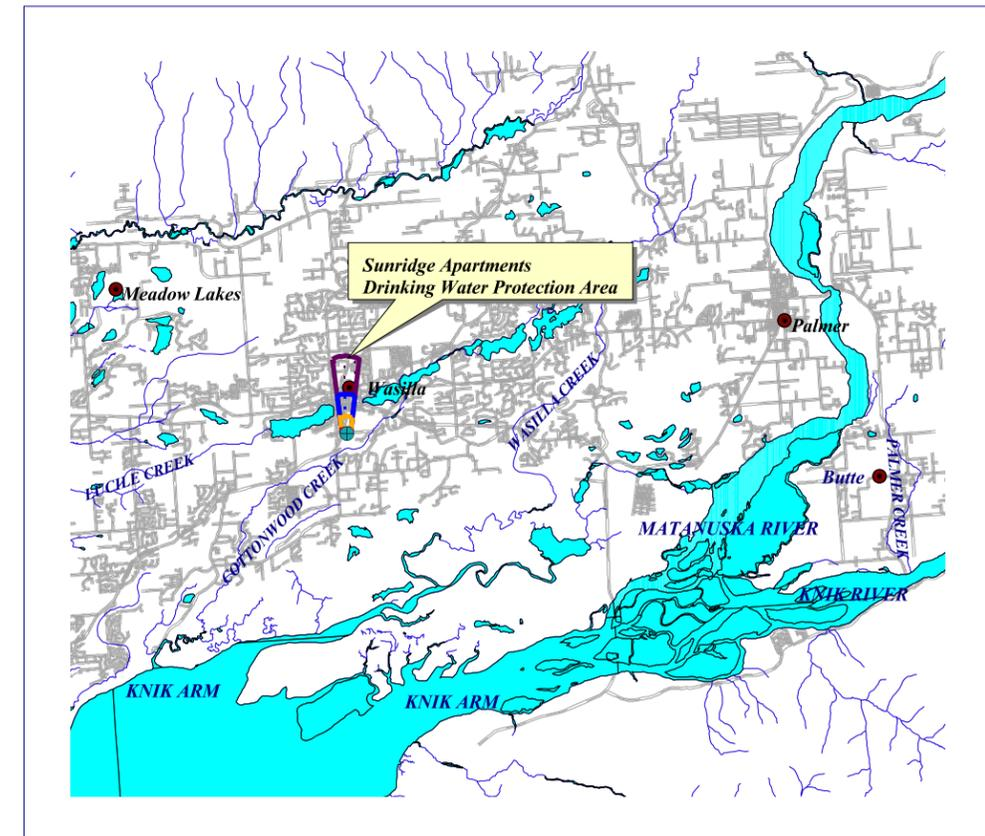

MAP ONE



APPENDIX B

Contaminant Source Inventory and Risk Ranking for Sunridge Apartments Well #1 (Tables 1-7)

Table 1**Contaminant Source Inventory for
Sunridge Apartments****PWSID 220228.001**

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	2	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	2	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-1	B	2	
Golf courses	X02	X02-1	B	2	
Highways and roads, paved (cement or asphalt)	X20	X20-2-5	B	2	
Appliance repair shops	C03	C03-1	C	3	
Construction trade areas and materials	C09	C09-1	C	3	
Florists	C12	C12-1	C	3	
Florists	C12	C12-2	C	3	
Funeral services and crematories	C13	C13-1	C	3	
Gasoline stations (without repair shop)	C15	C15-1	C	3	
Gasoline stations (without repair shop)	C15	C15-2	C	3	
Gasoline stations (without repair shop)	C15	C15-3	C	3	
Gasoline stations (with repair shop)	C16	C16-1	C	3	
Heavy equipment rental/storage	C18	C18-2	C	3	
Heavy equipment rental/storage	C18	C18-3	C	3	
Jewelers	C19	C19-1	C	3	
Motor/motor vehicle supplies stores	C28	C28-1	C	3	
Motor vehicle rental facilities - cars, trucks, ATV's, snow machines (with service department)	C30	C30-1	C	3	
Motor /motor vehicle repair shops	C31	C31-1	C	3	
Motor /motor vehicle repair shops	C31	C31-2	C	3	
Pet groomers	C34	C34-1	C	3	
Printers, publishers, copiers	C37	C37-1	C	3	

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Map Number</i>	<i>Comments</i>
Welding shops	C43	C43-1	C	3	
Welding shops	C43	C43-1	C	3	
Pet groomers	C34	C43-1	C	3	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-3-17	C	3	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-1	C	3	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-2	C	3	
Quarries (sand, gravel, rock, other?)	E10	E10-1	C	3	
Dye or ink manufacturing	I12	I12-1	C	3	
Tanks, diesel (underground)	T08	T08-1	C	3	
Tanks, diesel (underground)	T08	T08-2	C	3	
Tanks, diesel (underground)	T08	T08-3	C	3	
Tanks, diesel (underground)	T08	T08-4	C	3	
Tanks, gasoline (underground)	T12	T12-1	C	3	
Tanks, gasoline (underground)	T12	T12-2	C	3	
Tanks, gasoline (underground)	T12	T12-3	C	3	
Tanks, gasoline (underground)	T12	T12-4	C	3	
Tanks, gasoline (underground)	T12	T12-5	C	3	
Tanks, gasoline (underground)	T12	T12-6	C	3	
Contaminated sites, DEC recognized, non-Superfund, non-RCRA	U04	U04-1	C	3	
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U07-1	C	3	
Closed Leaking Underground Fuel Storage Tank (LUST) Sites	U08	U08-1	C	3	
Closed Leaking Underground Fuel Storage Tank (LUST) Sites	U08	U08-2	C	3	
Closed Leaking Underground Fuel Storage Tank (LUST) Sites	U08	U08-3	C	3	
Highways and roads, paved (cement or asphalt)	X20	X20-6-18	C	3	
Road/highway maintenance depots (including salt/sand storage areas)	X32	X32-1	C	3	
Firehouses	X38	X38-1	C	3	

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Map Number</i>	<i>Comments</i>
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-1	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-2	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-3	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-4	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-5	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-6	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-7	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-8	C	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-9	C	3	
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U07-2	D	4	
Motor vehicle/general storage yards/facilities	X27	X27	D	4	

Table 2

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Bacteria and Viruses*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	Medium	2	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	Medium	2	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-1	B	Low	2	
Highways and roads, paved (cement or asphalt)	X20	X20-2-5	B	Low	2	

Table 3

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Nitrates/Nitrites*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	Medium	2	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	Medium	2	
Golf courses	X02	X02-1	B	Medium	2	
Highways and roads, paved (cement or asphalt)	X20	X20-2-5	B	Low	2	
Florists	C12	C12-1	C	Low	3	
Florists	C12	C12-2	C	Low	3	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-3-17	C	Medium	3	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-1	C	High	3	
Quarries (sand, gravel, rock, other?)	E10	E10-1	C	Low	3	
Highways and roads, paved (cement or asphalt)	X20	X20-6-18	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-2	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-3	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-4	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-5	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-6	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-7	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-8	C	Low	3	

Table 3 (continued)

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Nitrates/Nitrites*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-9	C	Low	3	

Table 4

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Volatile Organic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	Low	2	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	Low	2	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-1	B	High	2	
Highways and roads, paved (cement or asphalt)	X20	X20-2-5	B	Low	2	
Appliance repair shops	C03	C03-1	C	Low	3	
Construction trade areas and materials	C09	C09-1	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-1	C	High	3	
Gasoline stations (without repair shop)	C15	C15-2	C	High	3	
Gasoline stations (without repair shop)	C15	C15-3	C	High	3	
Gasoline stations (with repair shop)	C16	C16-1	C	High	3	
Heavy equipment rental/storage	C18	C18-2	C	Medium	3	
Heavy equipment rental/storage	C18	C18-3	C	Medium	3	
Jewelers	C19	C19-1	C	Low	3	
Motor/motor vehicle supplies stores	C28	C28-1	C	Low	3	
Motor vehicle rental facilities - cars, trucks, ATV's, snow machines (with service department)	C30	C30-1	C	Medium	3	
Motor /motor vehicle repair shops	C31	C31-1	C	Medium	3	
Motor /motor vehicle repair shops	C31	C31-2	C	Medium	3	
Pet groomers	C34	C34-1	C	Low	3	
Pet groomers	C34	C34-1	C	Medium	3	
Printers, publishers, copiers	C37	C37-1	C	High	3	
Pet groomers	C34	C43-1	C	Medium	3	

Table 4 (continued)

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Volatile Organic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Welding shops	C43	C43-1	C	Medium	3	
Welding shops	C43	C43-1	C	Medium	3	
Pet groomers	C34	C43-1	C	Low	3	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-3-17	C	Low	3	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-1	C	High	3	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-2	C	High	3	
Quarries (sand, gravel, rock, other?)	E10	E10-1	C	Low	3	
Dye or ink manufacturing	I12	I12-1	C	High	3	
Tanks, diesel (underground)	T08	T08-1	C	High	3	
Tanks, diesel (underground)	T08	T08-2	C	High	3	
Tanks, diesel (underground)	T08	T08-3	C	High	3	
Tanks, diesel (underground)	T08	T08-4	C	High	3	
Tanks, gasoline (underground)	T12	T12-1	C	High	3	
Tanks, gasoline (underground)	T12	T12-2	C	High	3	
Tanks, gasoline (underground)	T12	T12-3	C	High	3	
Tanks, gasoline (underground)	T12	T12-4	C	High	3	
Tanks, gasoline (underground)	T12	T12-5	C	High	3	
Tanks, gasoline (underground)	T12	T12-6	C	High	3	
Open Leaking Underground Fuel Storage Tank (LUST) Sites	U07	U07-1	C	Low	3	
Closed Leaking Underground Fuel Storage Tank (LUST) Sites	U08	U08-1	C	Low	3	
Closed Leaking Underground Fuel Storage Tank (LUST) Sites	U08	U08-2	C	Low	3	

Table 4 (continued)

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Volatile Organic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Closed Leaking Underground Fuel Storage Tank (LUST) Sites	U08	U08-3	C	Low	3	
Highways and roads, paved (cement or asphalt)	X20	X20-6-18	C	Low	3	
Road/highway maintenance depots (including salt/sand storage areas)	X32	X32-1	C	Low	3	
Firehouses	X38	X38-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-2	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-3	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-4	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-5	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-6	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-7	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-8	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-9	C	Low	3	
Motor vehicle/general storage yards/facilities	X27	X27	D	Low	4	

Table 5

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments*

PWSID 220228.001

Sources of Heavy Metals, Cyanide and Other Inorganic Chemicals

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	Low	2	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	Low	2	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-1	B	High	2	
Golf courses	X02	X02-1	B	Low	2	
Highways and roads, paved (cement or asphalt)	X20	X20-2-5	B	Low	2	
Appliance repair shops	C03	C03-1	C	Low	3	
Construction trade areas and materials	C09	C09-1	C	Low	3	
Florists	C12	C12-1	C	Low	3	
Florists	C12	C12-2	C	Low	3	
Funeral services and crematories	C13	C13-1	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-1	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-2	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-3	C	Low	3	
Gasoline stations (with repair shop)	C16	C16-1	C	Low	3	
Heavy equipment rental/storage	C18	C18-2	C	Low	3	
Heavy equipment rental/storage	C18	C18-3	C	Low	3	
Jewelers	C19	C19-1	C	Low	3	
Motor/motor vehicle supplies stores	C28	C28-1	C	Low	3	
Motor vehicle rental facilities - cars, trucks, ATV's, snow machines (with service department)	C30	C30-1	C	Low	3	
Motor /motor vehicle repair shops	C31	C31-1	C	Medium	3	
Motor /motor vehicle repair shops	C31	C31-2	C	Medium	3	

Table 5 (continued)

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Heavy Metals, Cyanide and Other Inorganic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Pet groomers	C34	C34-1	C	Medium	3	
Printers, publishers, copiers	C37	C37-1	C	Medium	3	
Welding shops	C43	C43-1	C	Low	3	
Pet groomers	C34	C43-1	C	Medium	3	
Welding shops	C43	C43-1	C	Low	3	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-3-17	C	Low	3	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-1	C	High	3	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-2	C	High	3	
Dye or ink manufacturing	I12	I12-1	C	High	3	
Tanks, gasoline (underground)	T12	T12-1	C	Medium	3	
Tanks, gasoline (underground)	T12	T12-2	C	Medium	3	
Tanks, gasoline (underground)	T12	T12-3	C	Medium	3	
Tanks, gasoline (underground)	T12	T12-4	C	Medium	3	
Tanks, gasoline (underground)	T12	T12-5	C	Medium	3	
Tanks, gasoline (underground)	T12	T12-6	C	Medium	3	
Contaminated sites, DEC recognized, non-Superfund, non-RCRA	U04	U04-1	C	Low	3	
Highways and roads, paved (cement or asphalt)	X20	X20-6-18	C	Low	3	
Road/highway maintenance depots (including salt/sand storage areas)	X32	X32-1	C	Low	3	
Firehouses	X38	X38-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-2	C	Low	3	

Table 5 (continued)

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Heavy Metals, Cyanide and Other Inorganic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-3	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-4	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-5	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-6	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-7	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-8	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-9	C	Low	3	

Table 6

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Synthetic Organic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	Low	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	Low	2	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-1	B	Low	2	
Golf courses	X02	X02-1	B	High	2	
Funeral services and crematories	C13	C13-1	C	Low	3	
Pet groomers	C34	C34-1	C	Low	3	
Printers, publishers, copiers	C37	C37-1	C	Low	3	
Pet groomers	C34	C43-1	C	Low	3	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-3-17	C	Low	3	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-2	C	Low	3	
Dye or ink manufacturing	I12	I12-1	C	Medium	3	
Road/highway maintenance depots (including salt/sand storage areas)	X32	X32-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-1	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-2	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-3	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-4	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-5	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-6	C	Low	3	

Table 6 (continued)

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Synthetic Organic Chemicals*

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-7	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-8	C	Low	3	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-9	C	Low	3	

Table 7

*Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Other Organic Chemicals*

PWSID 220228.001

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-1	A	Low	2	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-2	B	Low	2	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-1	B	Medium	2	
Highways and roads, paved (cement or asphalt)	X20	X20-2-5	B	Low	2	
Appliance repair shops	C03	C03-1	C	Low	3	
Construction trade areas and materials	C09	C09-1	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-1	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-2	C	Low	3	
Gasoline stations (without repair shop)	C15	C15-3	C	Low	3	
Gasoline stations (with repair shop)	C16	C16-1	C	Medium	3	
Heavy equipment rental/storage	C18	C18-2	C	Medium	3	
Heavy equipment rental/storage	C18	C18-3	C	Medium	3	
Motor vehicle rental facilities - cars, trucks, ATV's, snow machines (with service department)	C30	C30-1	C	Medium	3	
Motor /motor vehicle repair shops	C31	C31-1	C	Medium	3	
Motor /motor vehicle repair shops	C31	C31-2	C	Medium	3	
Pet groomers	C34	C34-1	C	Medium	3	
Welding shops	C43	C43-1	C	Low	3	
Pet groomers	C34	C43-1	C	Medium	3	
Welding shops	C43	C43-1	C	Low	3	
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-3-17	C	Low	3	

Table 7 (continued)

Contaminant Source Inventory and Risk Ranking for
Sunridge Apartments
Sources of Other Organic Chemicals

PWSID 220228.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-1	C	High	3	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-2	C	Medium	3	
Quarries (sand, gravel, rock, other?)	E10	E10-1	C	Low	3	
Dye or ink manufacturing	I12	I12-1	C	High	3	
Contaminated sites, DEC recognized, non-Superfund, non-RCRA	U04	U04-1	C	Low	3	
Highways and roads, paved (cement or asphalt)	X20	X20-6-18	C	Low	3	
Motor vehicle/general storage yards/facilities	X27	X27	D	Low	4	



APPENDIX C

Sunridge Apartments Well #1 Drinking Water Protection Area and Potential and Existing Contaminant Sources (Maps 2-3)

Sunridge Apartments Existing and Potential Contaminant Sources - PWS #220228


Legend

- Sunridge Apartments Well Location
- Zone A
 - ▨ Several Months Travel Time
- Zone B
 - ▨ Less Than Two Years Time of Travel
- Zone C
 - ▨ Less Than Five Years Time of Travel
- Zone D
 - ▨ Less Than Ten Years Time of Travel
- ▬ Rivers
- ▭ Lakes
- ▬ Sewerlines (D1)
- Contaminant Source
 - ♦ Motor Vehicle Waste Disposal (D42)
 - Golf Course (X2)
 - ▬ Roads
 - ▭ Land Parcels

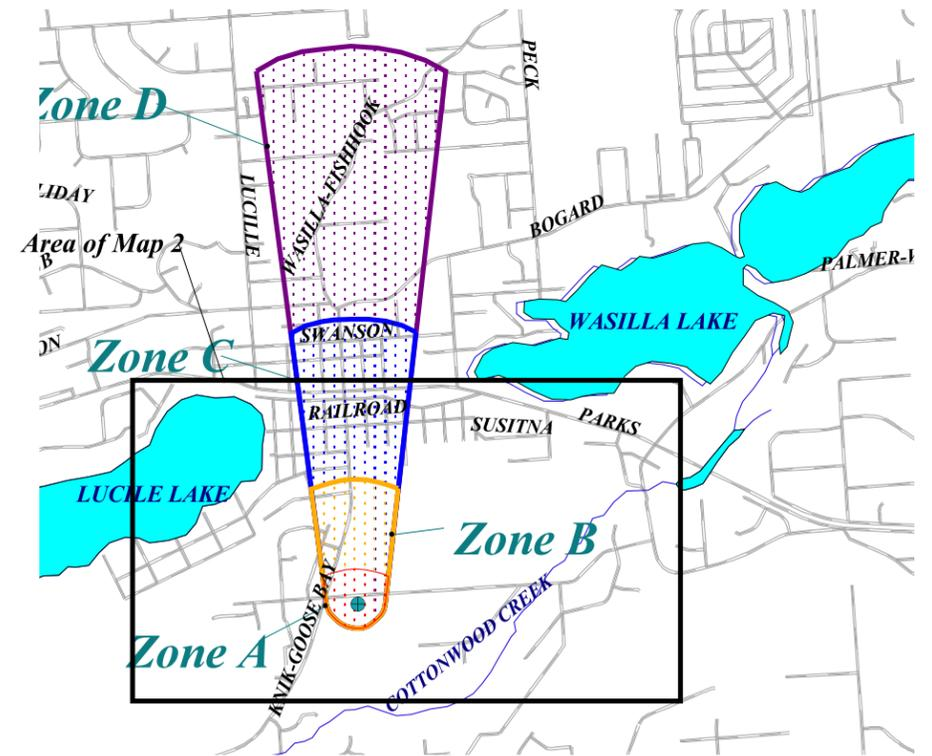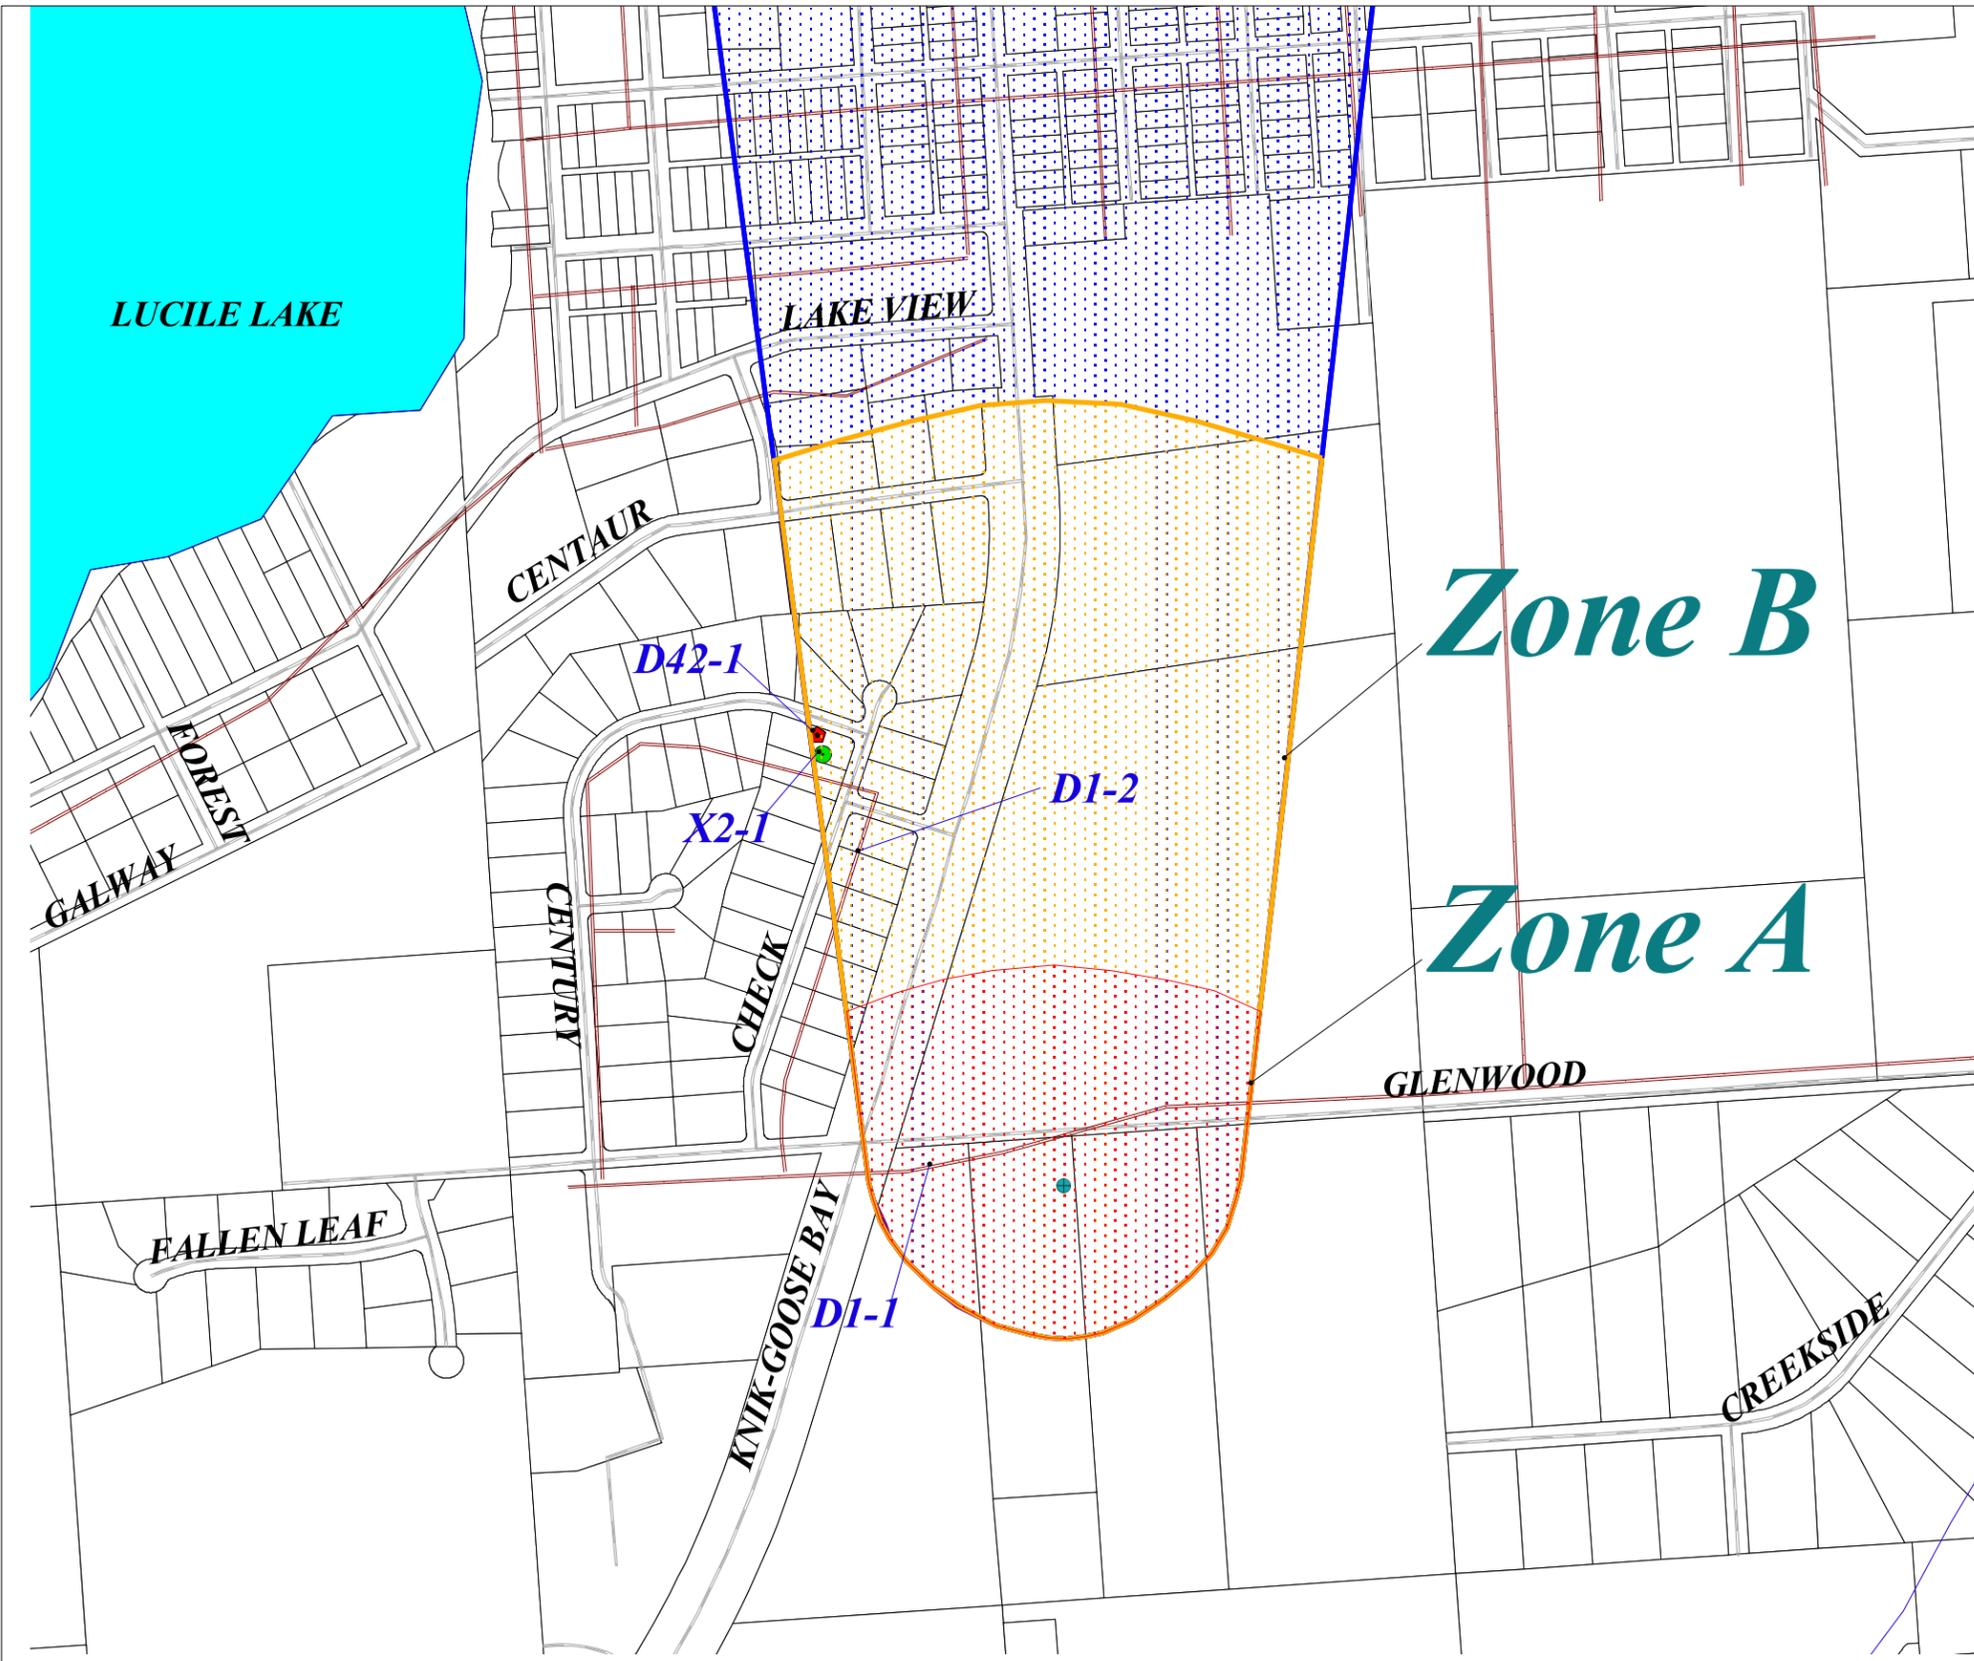


800 0 800 1600 2400 3200 Feet

MAP TWO



Sunridge Apartments Existing and Potential Contaminant Sources - PWS #220228

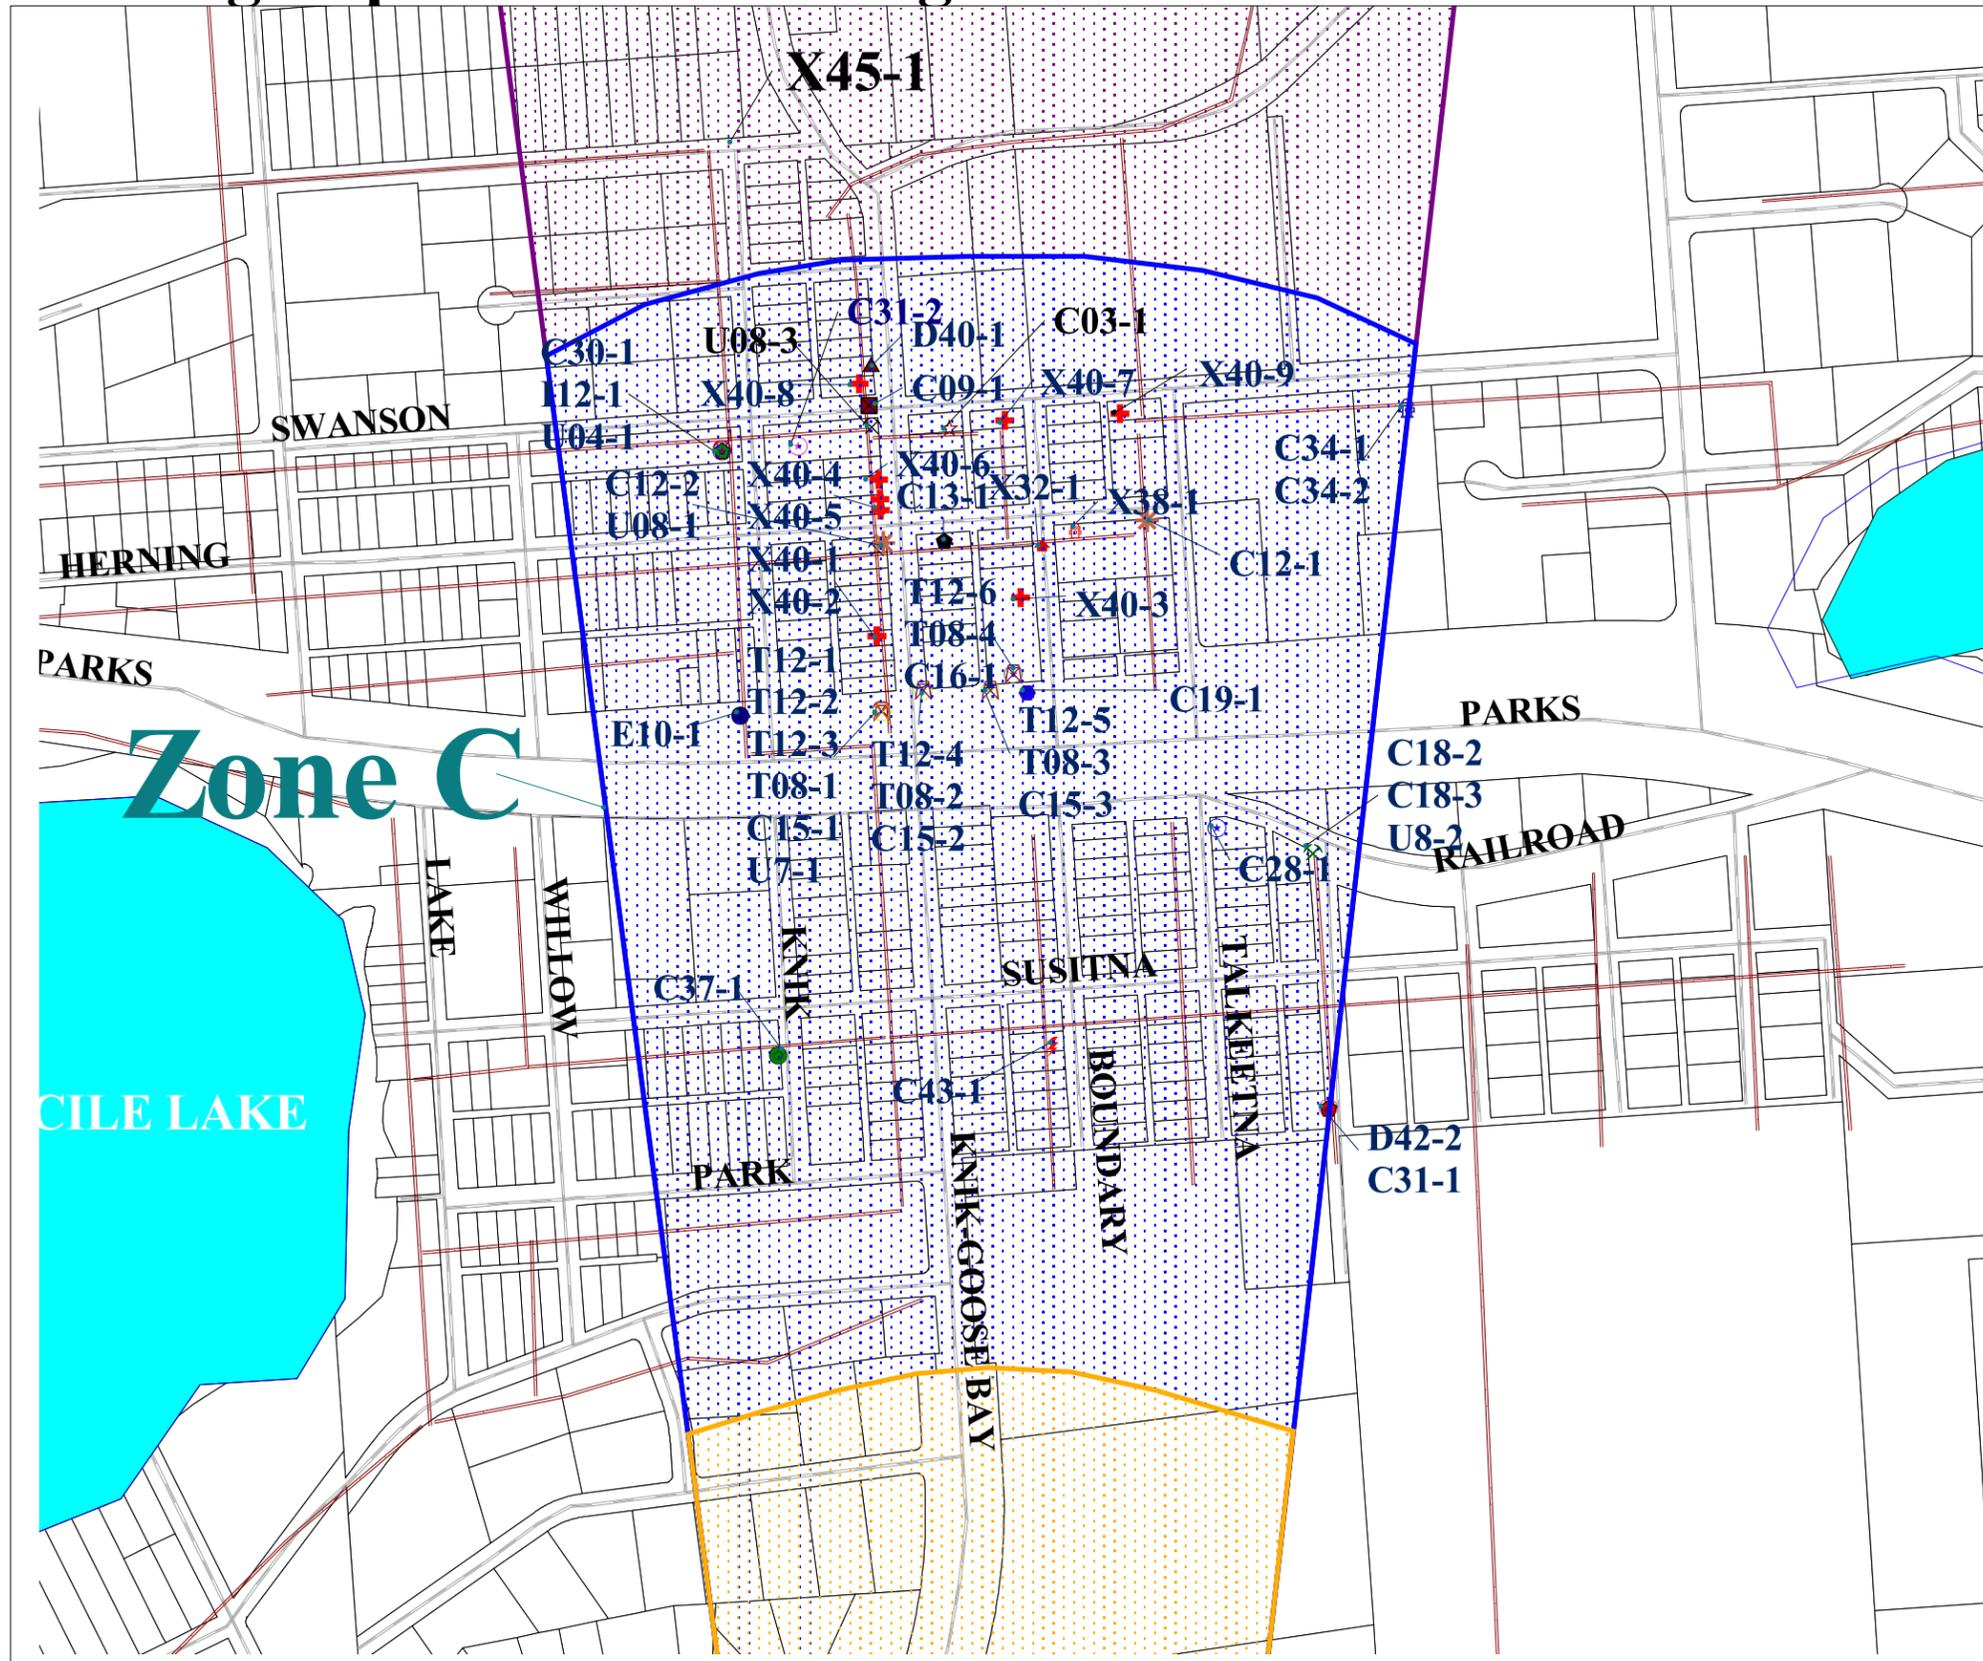


Legend

- Sunridge Apartments Well Location
- Zone A**
- Several Months Travel Time
- Zone B**
- Less Than Two Years Time of Travel
- Zone C**
- Less Than Five Years Time of Travel
- Zone D**
- Less Than Ten Years Time of Travel
- Contaminant Sources**
- ✱ Florist (C12)
- ◆ Funeral Services and Crematorium (C13)
- ⊕ Gas Stations with Repair Shop (C15)
- ⊗ Gas Stations without Repair Shop (C16)
- ⊗ Heavy Equipment Rental/Store (C18)
- Jewelers (C19)
- ⊕ Motor Vehicle Supplies (C28)
- ☆ Appliance Repair (C03)
- ⊕ Motor Vehicle Rental (C30)
- ⊕ Motor Vehicle Repair (C31)
- ⊕ Pet Groomers (C34)
- Printers, Publishers, Copiers (C37)
- ⚡ Welding Shops (C43)
- ⊕ Body Shops (C5)
- Construction Trade (C09)
- ▲ Industrial Injection Wells (D40)
- ◆ Motor Shop Injection Wells (D42)
- Quarries (E10)
- ◆ Dye or Ink Manufacturing (I12)
- ⊗ Underground Gasoline Tanks (T12)
- ⊗ Underground Diesel Tanks (T08)
- ⊗ Contaminated Sites (U4)
- ⊗ Leaking Underground Fuel Storage (U7)
- ⊗ Closed Leaking Underground Tank (U8)
- ⊕ Motor Vehicle Storage (X27)
- ◆ Road and Highway Maintenance (X32)
- ⊕ Firehouses (X38)
- + Medical/Veterinary Facilities (X40)
- ◆ Vocational Training Facilities (X45)
- Rivers
- Lakes
- Sewerlines (D1)
- Roads
- Land Parcels




MAP THREE



Sunridge Apartments Existing and Potential Contaminant Sources - PWS #220228

Legend


- Sunridge Apartments Well Location
- Zone A
 - ▨ Several Months Travel Time
- Zone B
 - ▨ Less Than Two Years Time of Travel
- Zone C
 - ▨ Less Than Five Years Time of Travel
- Zone D
 - ▨ Less Than Ten Years Time of Travel
- Contaminant Sources
 - ✱ Florist (C12)
 - ◆ Funeral Services and Crematorium (C13)
 - ⊕ Gas Stations with Repair Shop (C15)
 - ⊗ Gas Stations without Repair Shop (C16)
 - ⊗ Heavy Equipment Rental/Store (C18)
 - Jewelers (C19)
 - ⊕ Motor Vehicle Supplies (C28)
 - ☆ Appliance Repair (C03)
 - ⊕ Motor Vehicle Rental (C30)
 - ⊕ Motor Vehicle Repair (C31)
 - 🛁 Pet Groomers (C34)
 - Printers, Publishers, Copiers (C37)
 - ⚡ Welding Shops (C43)
 - ⊕ Body Shops (C5)
 - Construction Trade (C09)
 - ▲ Industrial Injection Wells (D40)
 - ◆ Motor Shop Injection Wells (D42)
 - Quarries (E10)
 - ◆ Dye or Ink Manufacturing (I12)
 - ▨ Underground Gasoline Tanks (T12)
 - ▨ Undergruund Dielsel Tanks (T08)
 - ⊗ Contaminated Sites (U4)
 - ⊗ Leaking Underground Fuel Storage (U7)
 - ⊗ Closed Leaking Underground Tank (U8)
 - ⊕ Motor Vehicle Storage (X27)
 - ▲ Road and Highway Maintenance (X32)
 - 🚒 Firehouses (X38)
 - ⊕ Medical/Veterinary Facilities (X40)
 - ⊕ Vocational Training Facilities (X45)
 - ▨ Rivers
 - ▨ Lakes
 - ▨ Sewerlines (D1)
 - ▨ Roads
 - ▨ Land Parcels

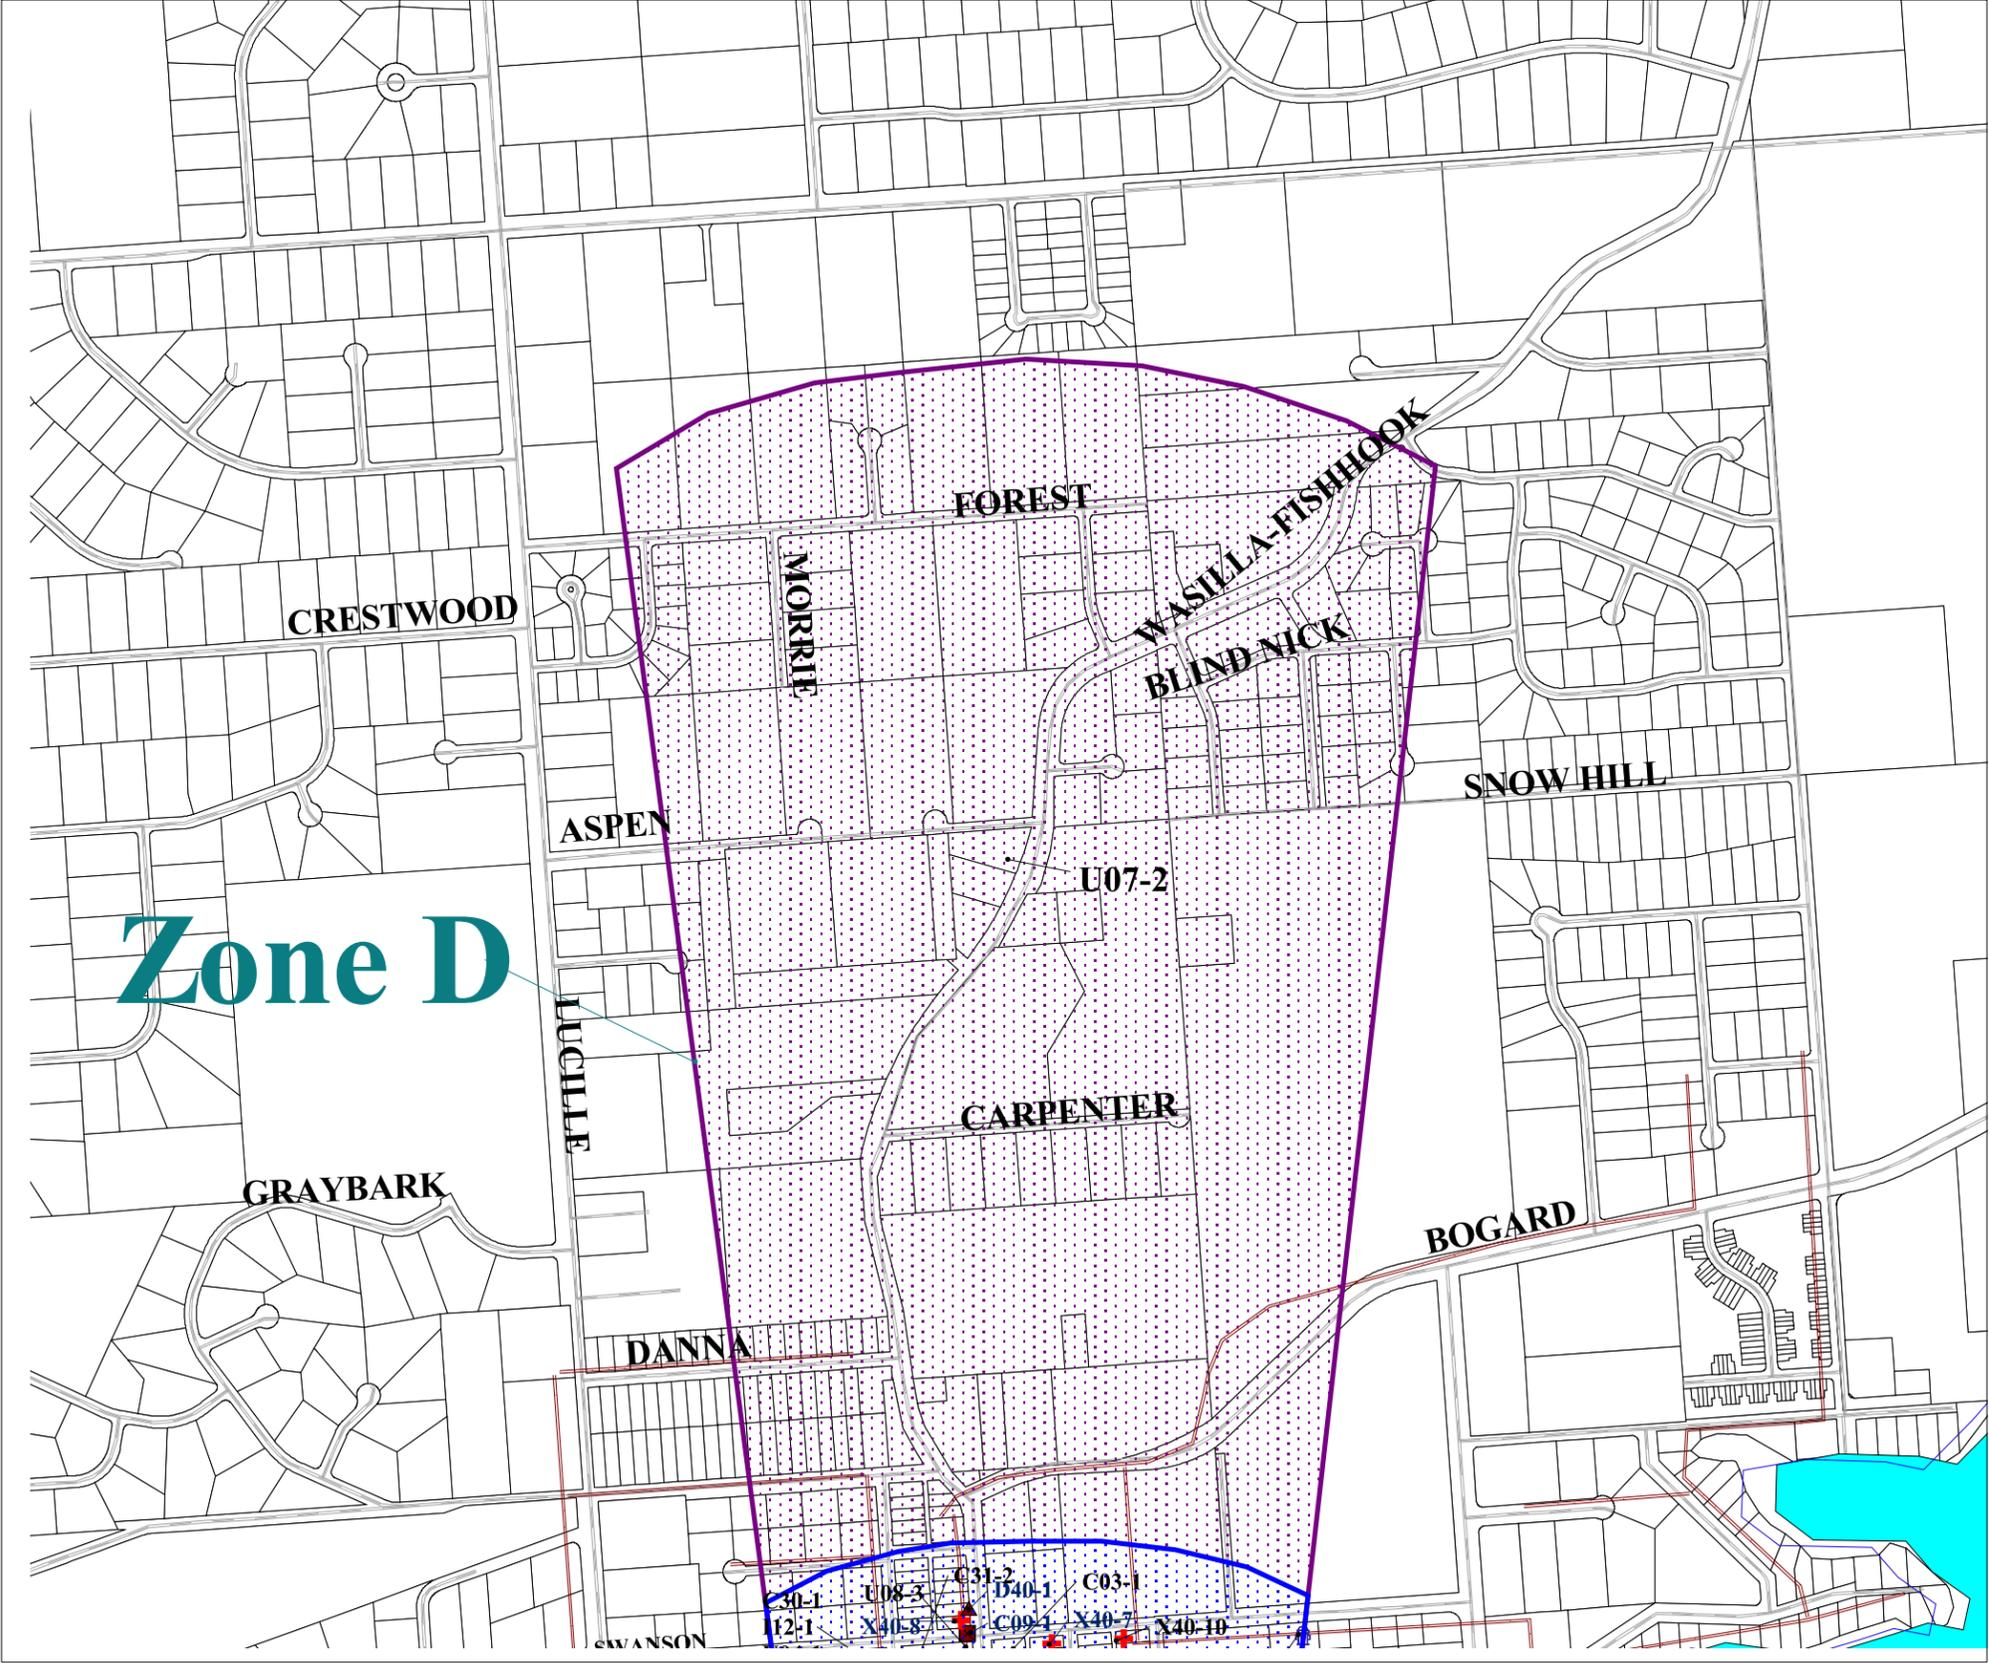

Zone D




MAP FOUR



APPENDIX D

Vulnerability Analysis for Sunridge Apartments Well #1 Public Drinking Water Source (Charts 1-14)

Chart 1. Susceptibility of the wellhead - Sunridge Apartments

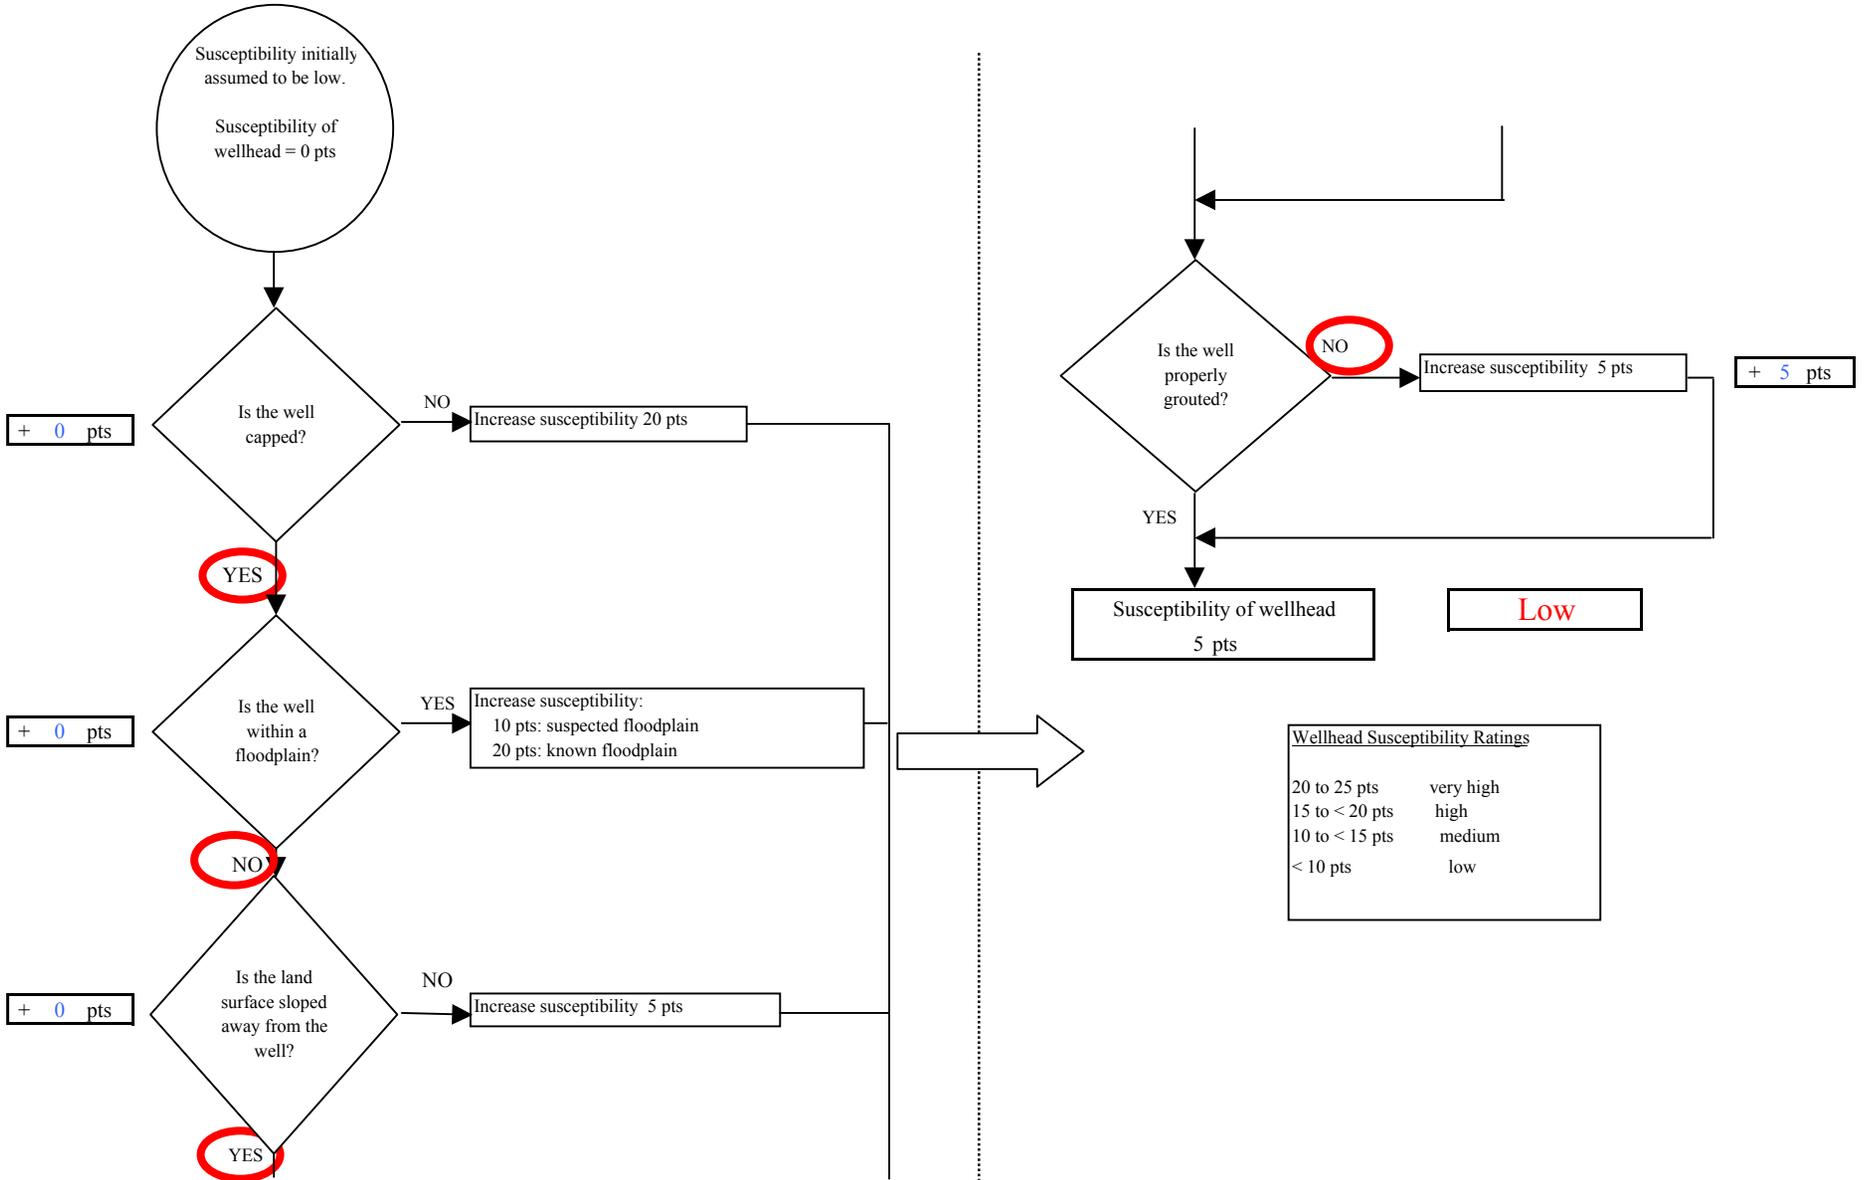

Wellhead Susceptibility Ratings

20 to 25 pts	very high
15 to < 20 pts	high
10 to < 15 pts	medium
< 10 pts	low

Chart 2. Susceptibility of the aquifer - Sunridge Apartments

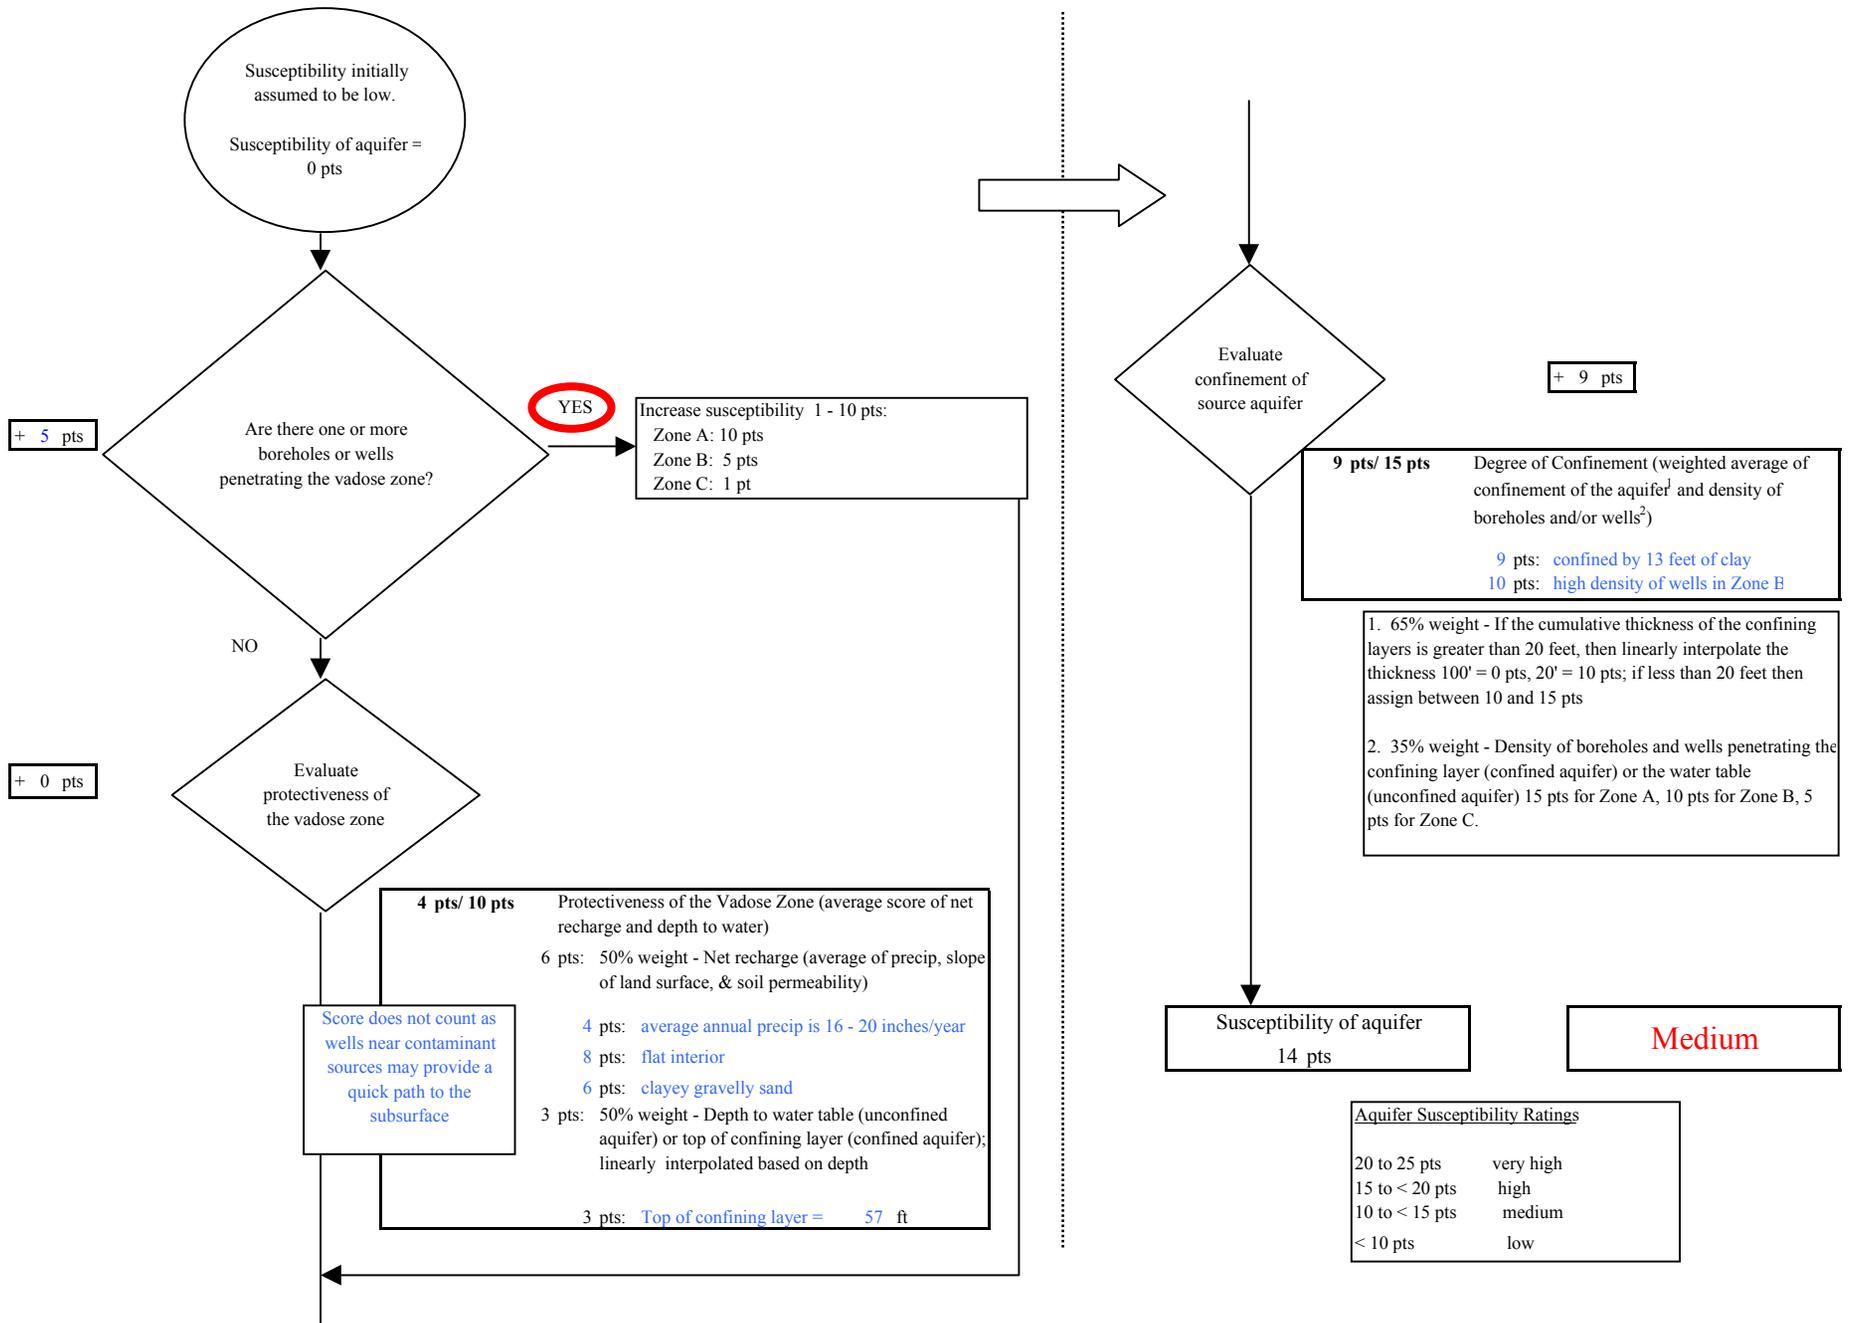


Chart 3. Contaminant risks for Sunridge Apartments - Bacteria & Viruses

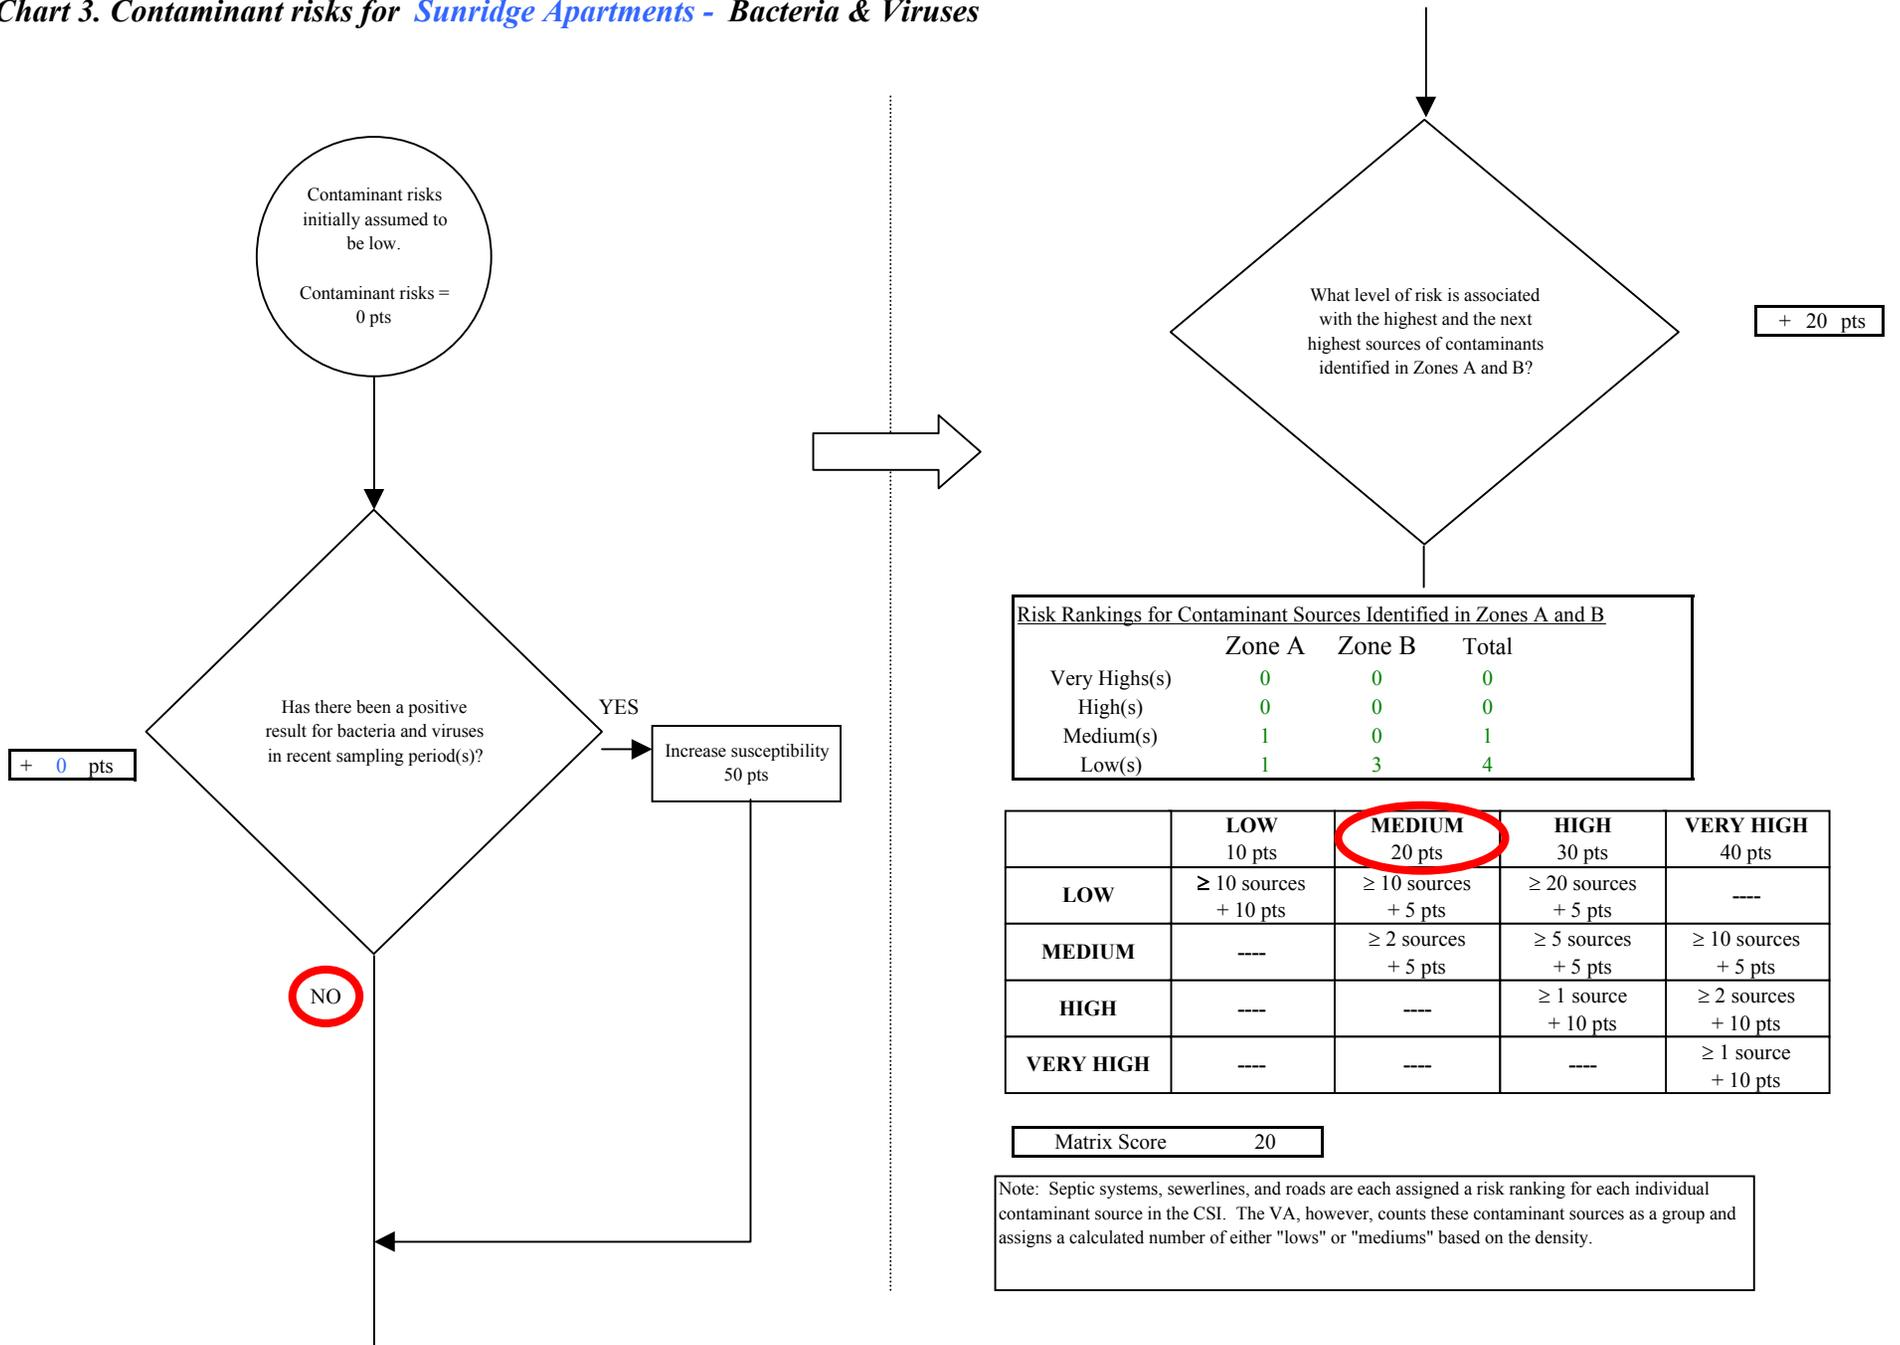


Chart 3. Contaminant risks for Sunridge Apartments - Bacteria & Viruses

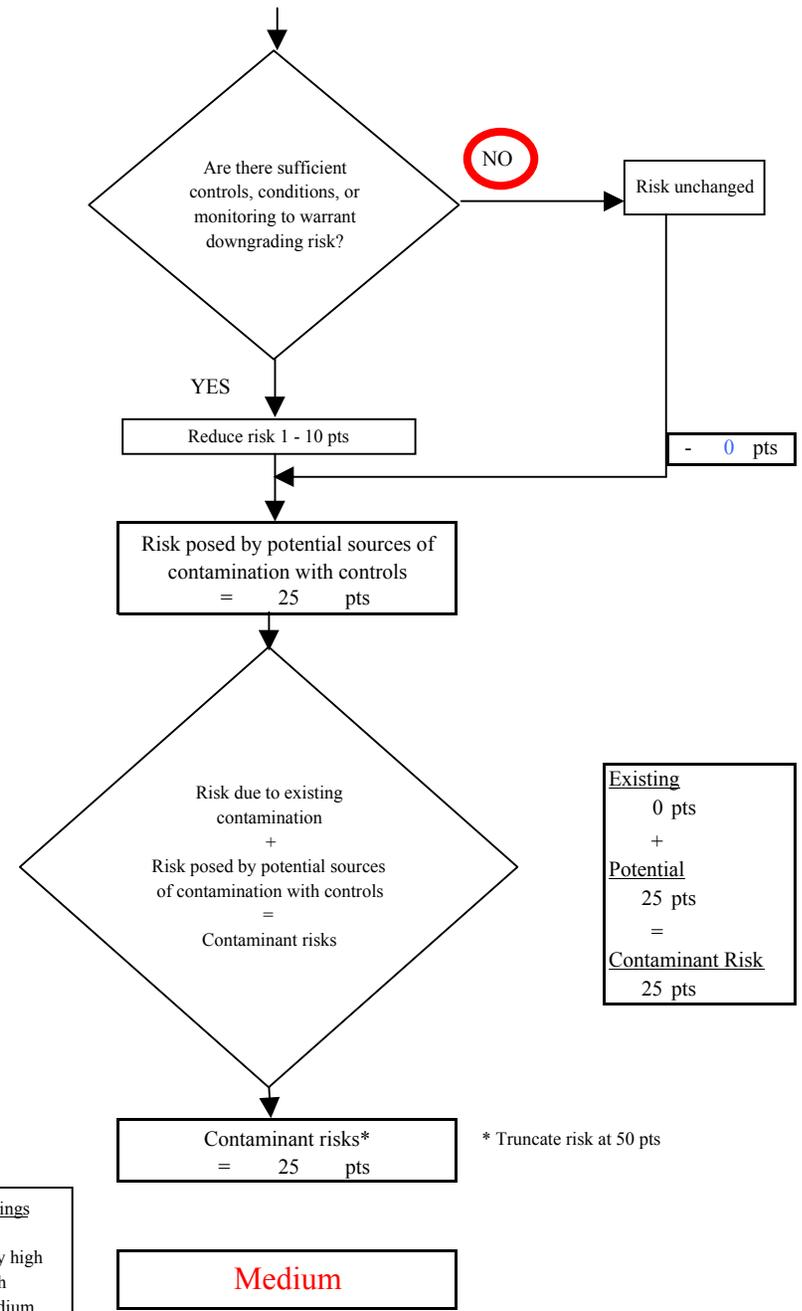

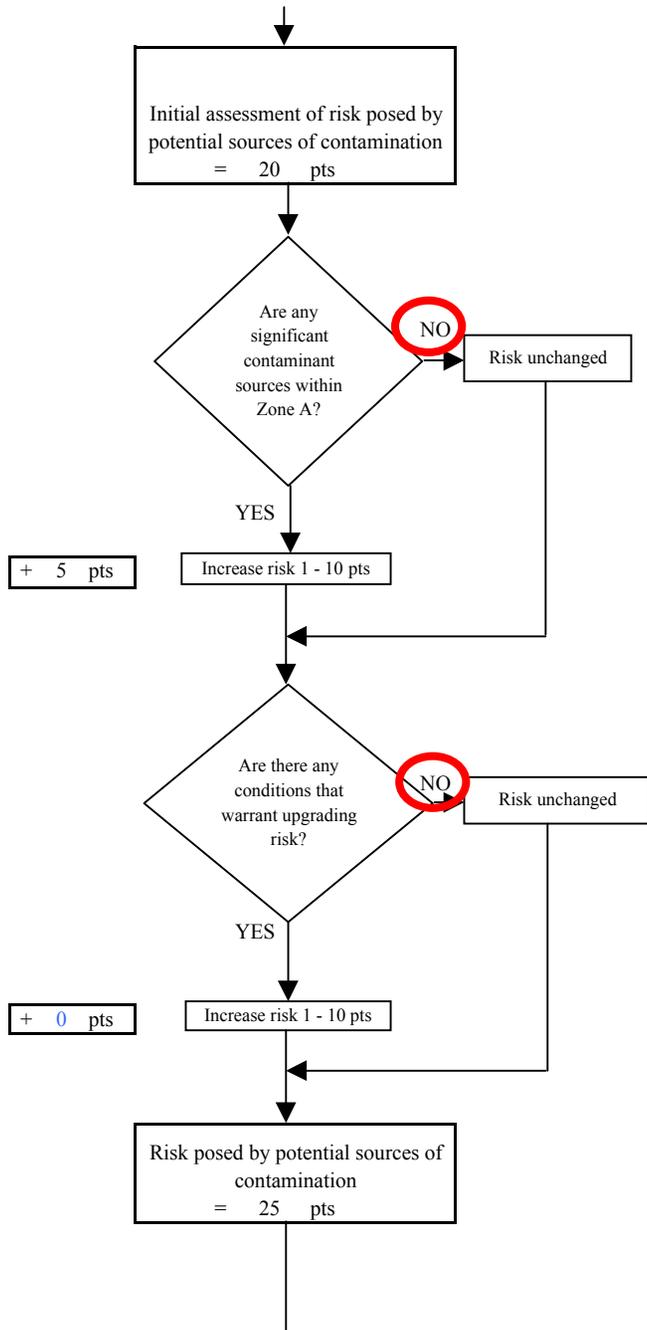


Chart 4. Vulnerability analysis for Sunridge Apartments - Bacteria & Viruses

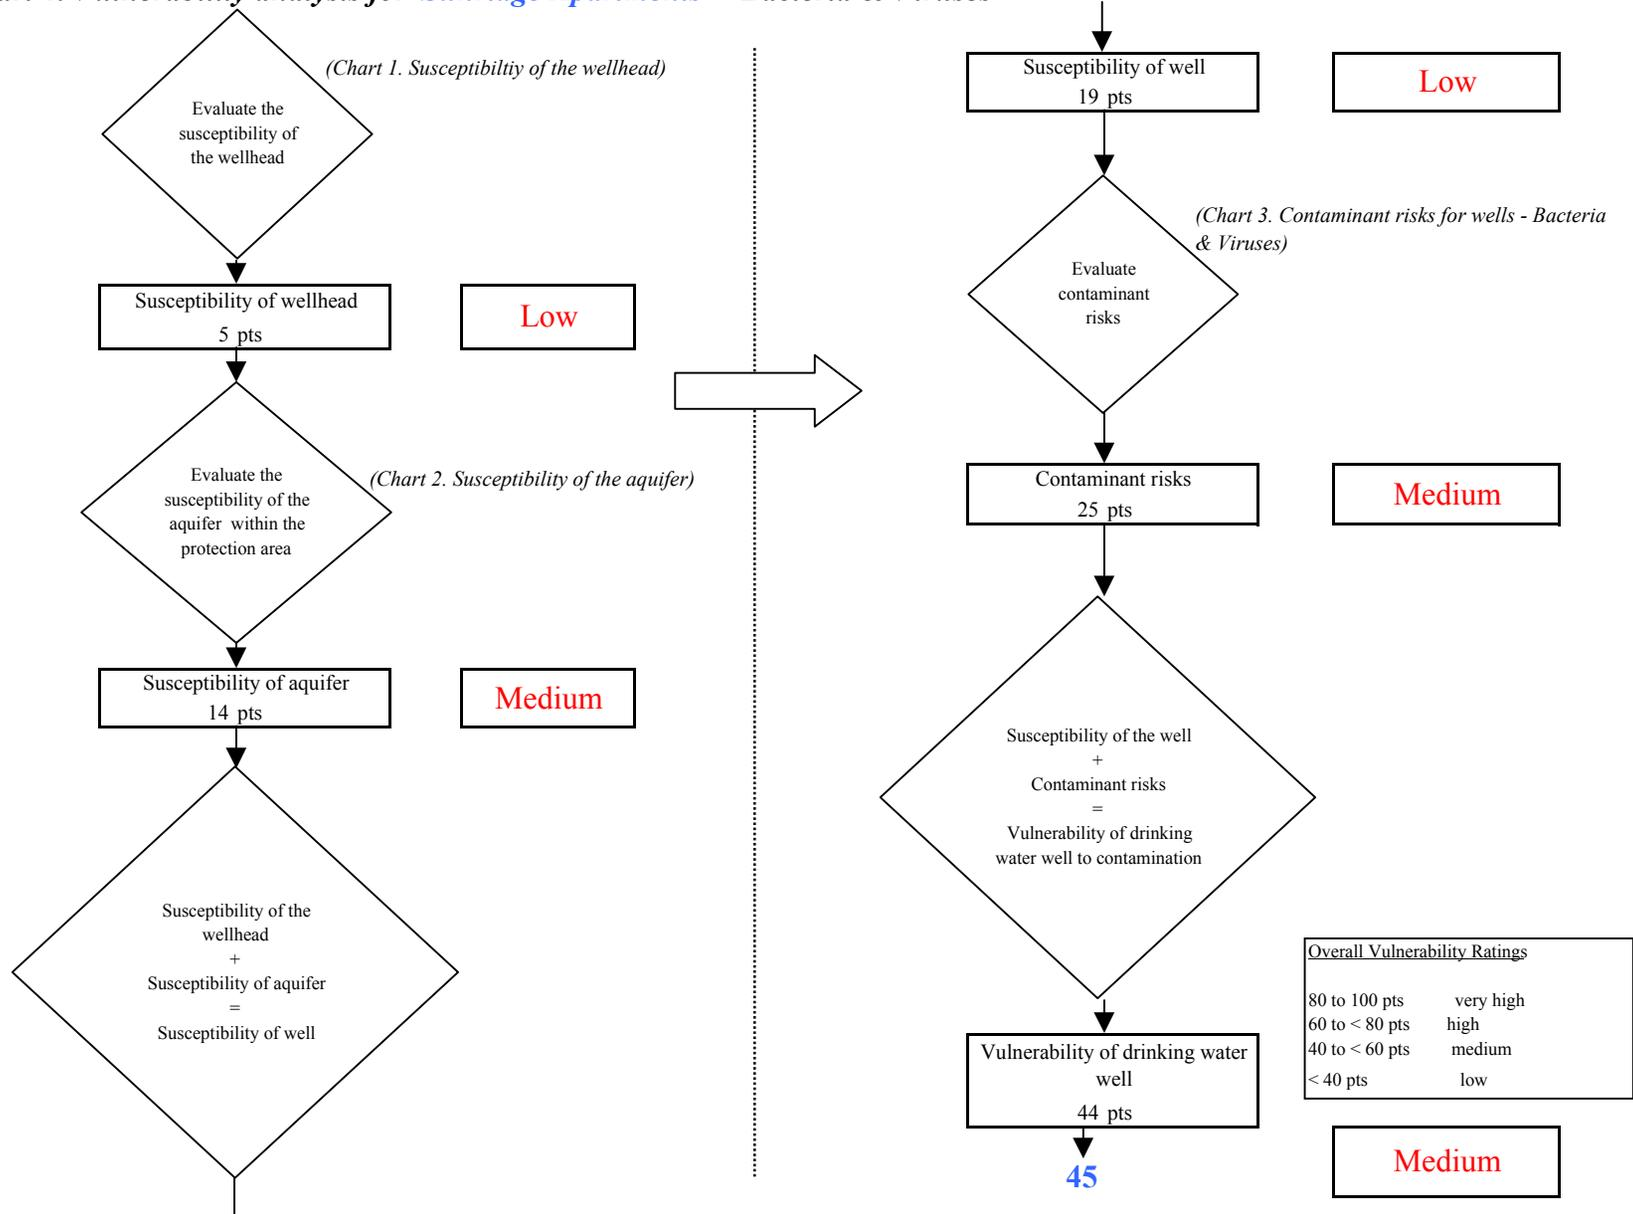


Chart 5. Contaminant risks for Sunridge Apartments - Nitrates and Nitrites


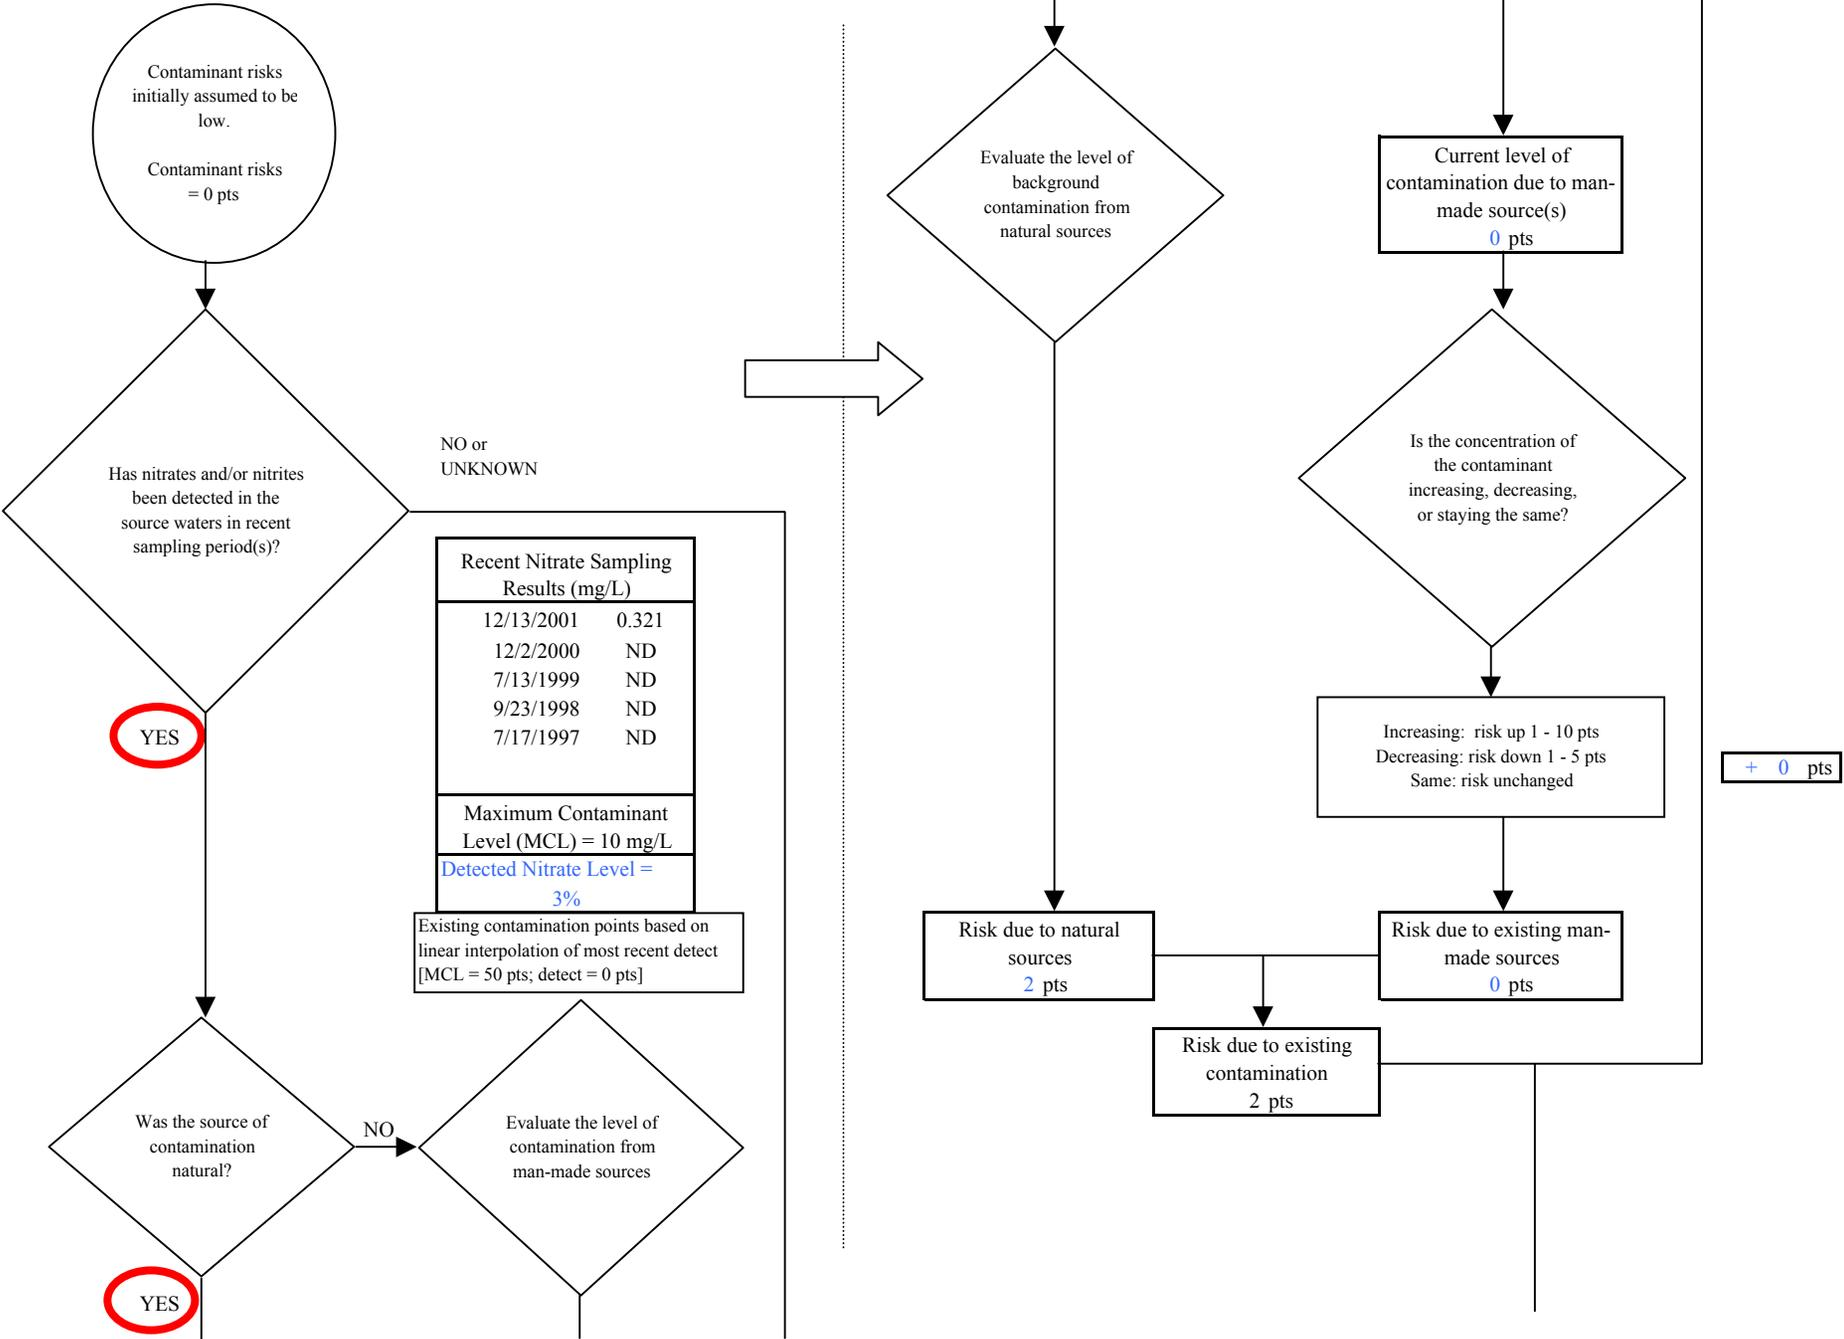


Chart 5. Contaminant risks for Sunridge Apartments - Nitrates and Nitrites

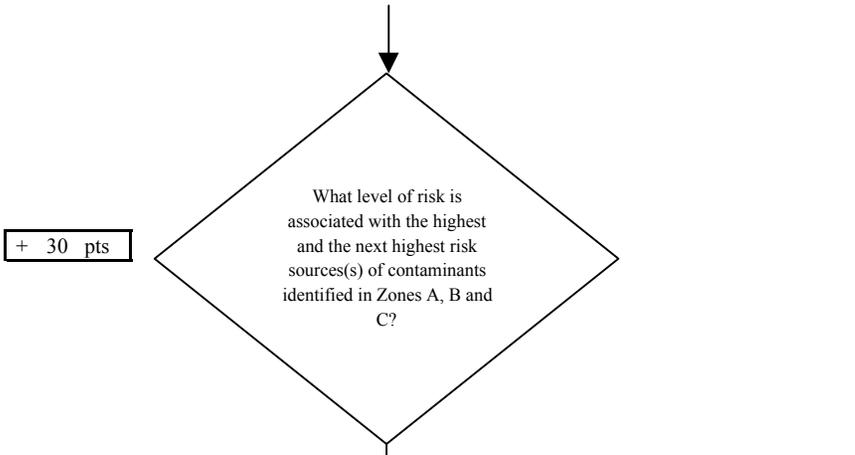

Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	1	1
Medium(s)	1	1	2
Low(s)	1	15	16

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 30

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

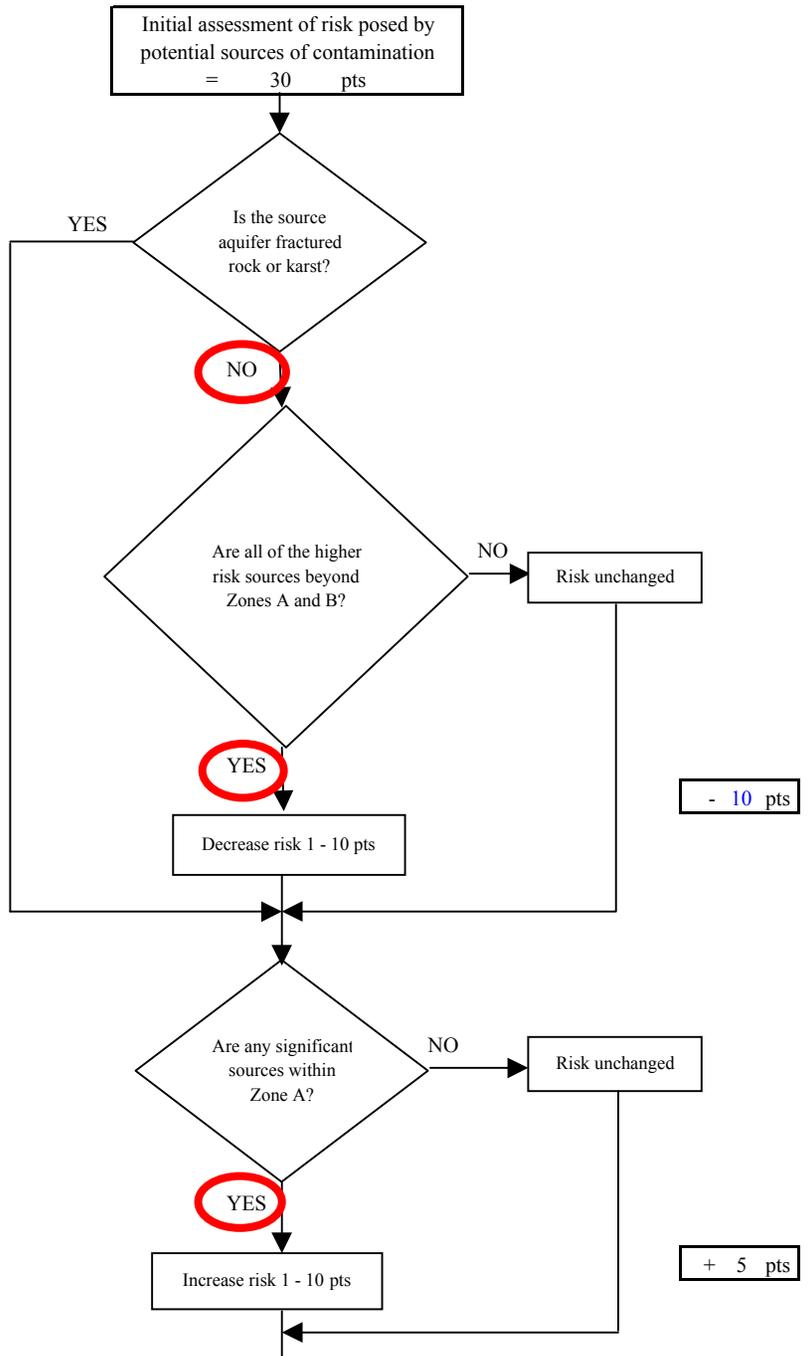



Chart 5. Contaminant risks for Sunridge Apartments - Nitrates and Nitrites

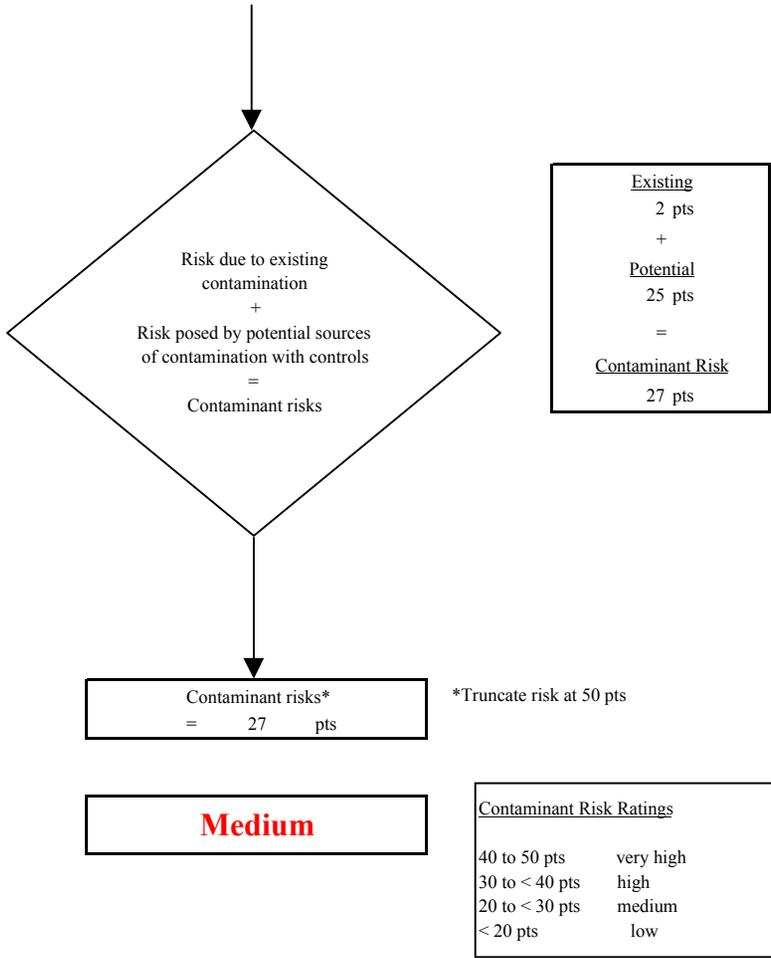

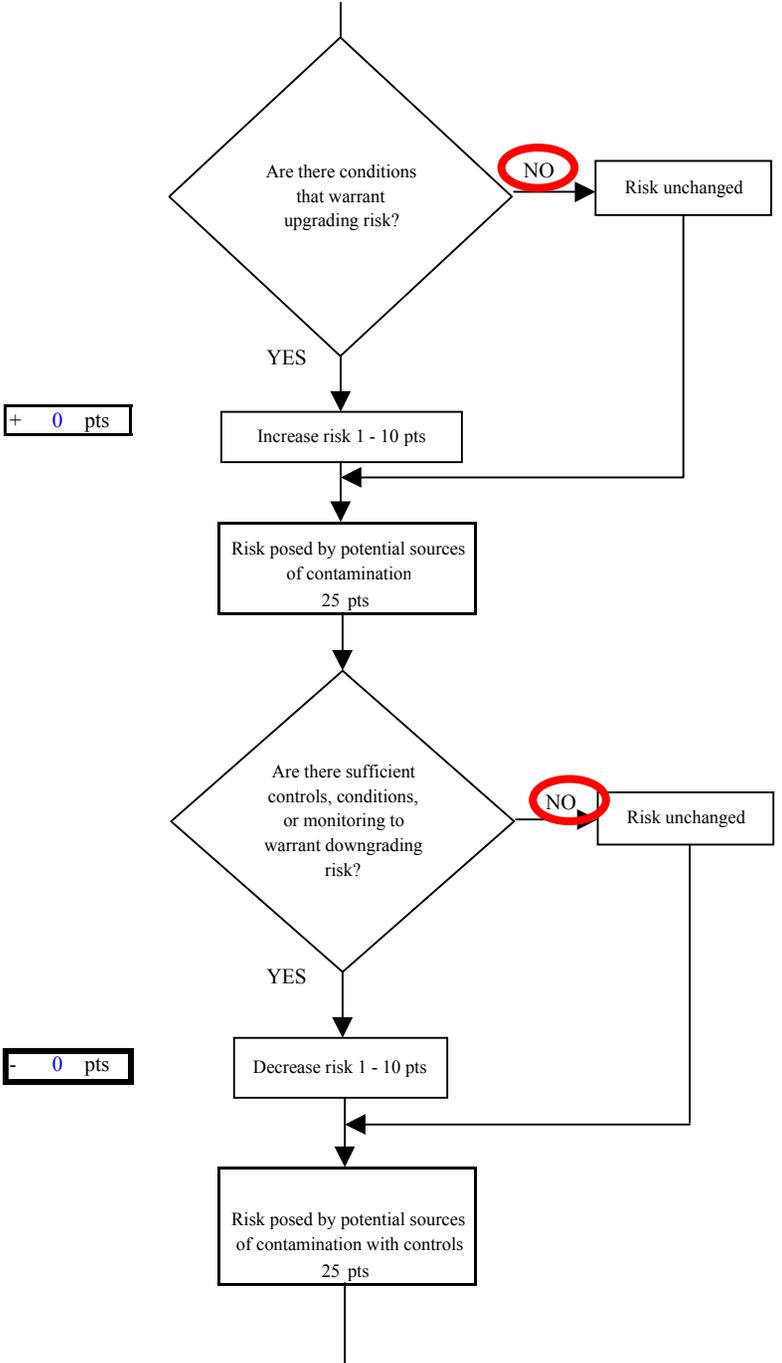


Chart 6. Vulnerability analysis for Sunridge Apartments - Nitrates and Nitrites

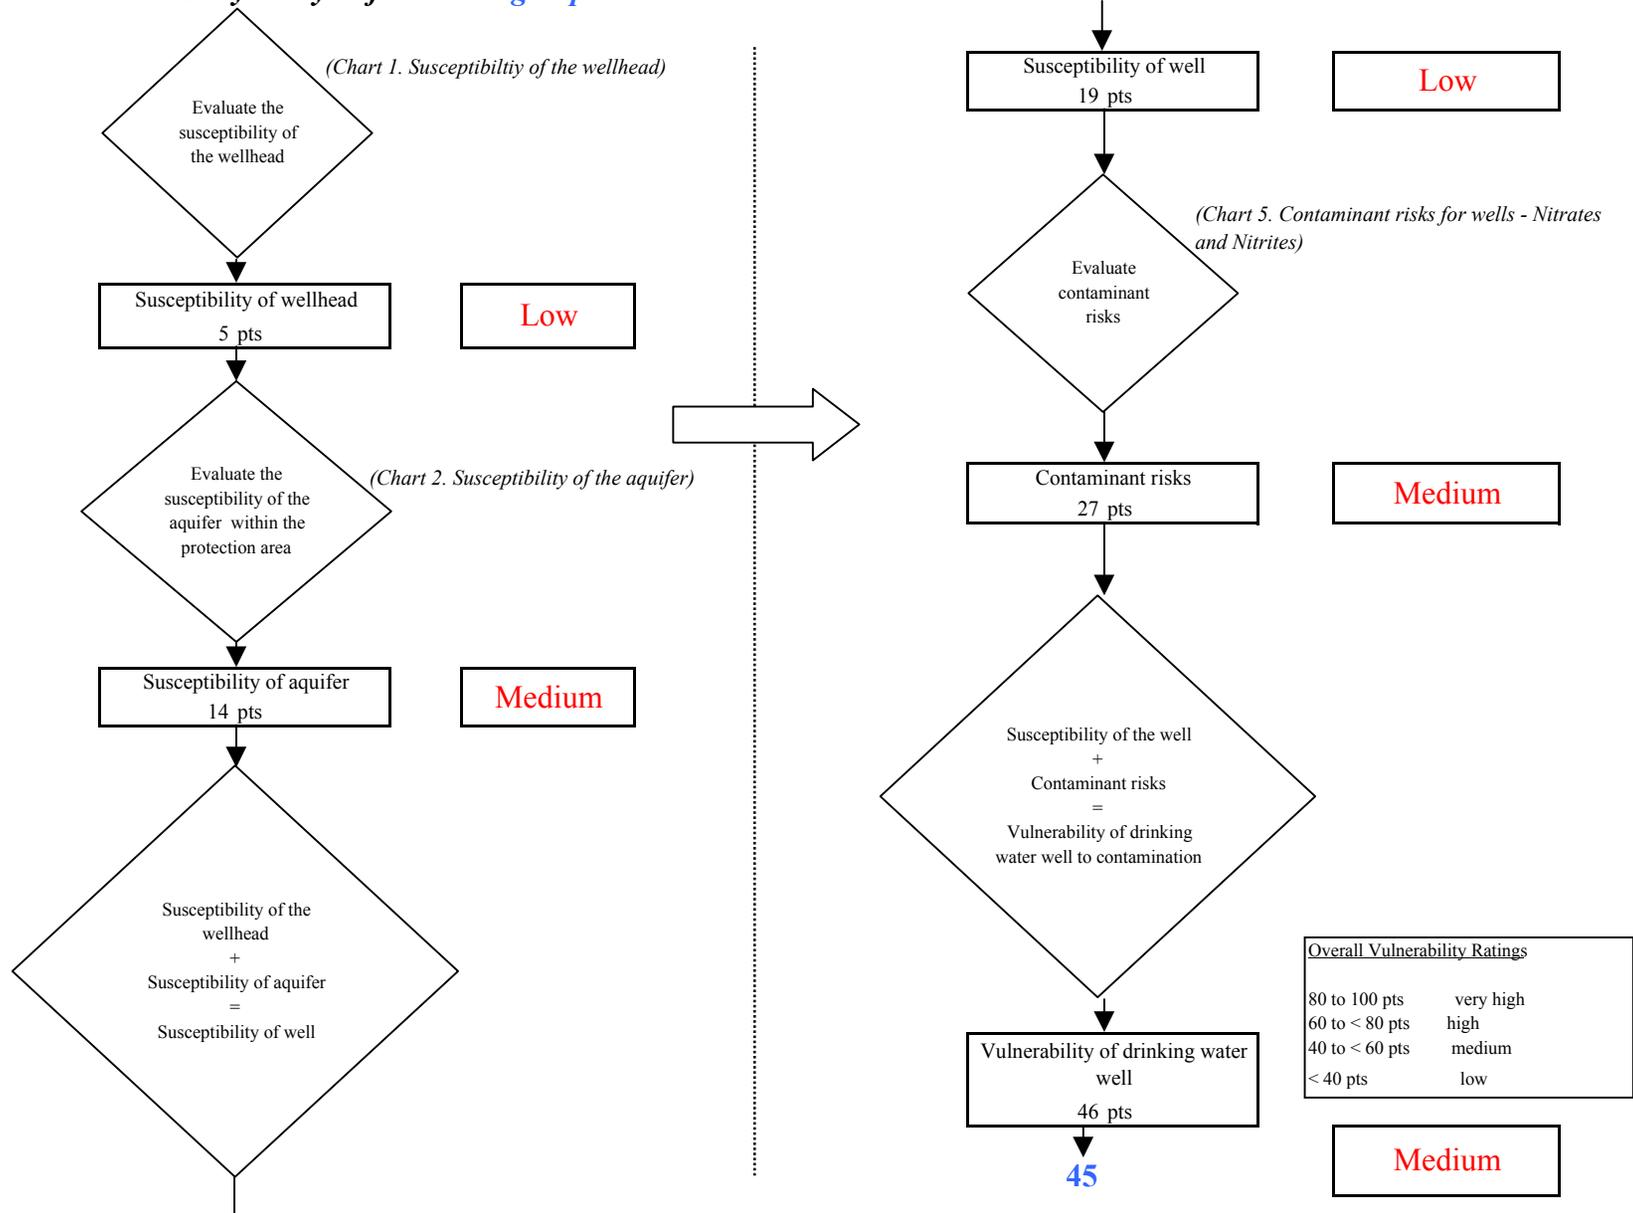


Chart 7. Contaminant risks for Sunridge Apartments - Volatile Organic Chemicals


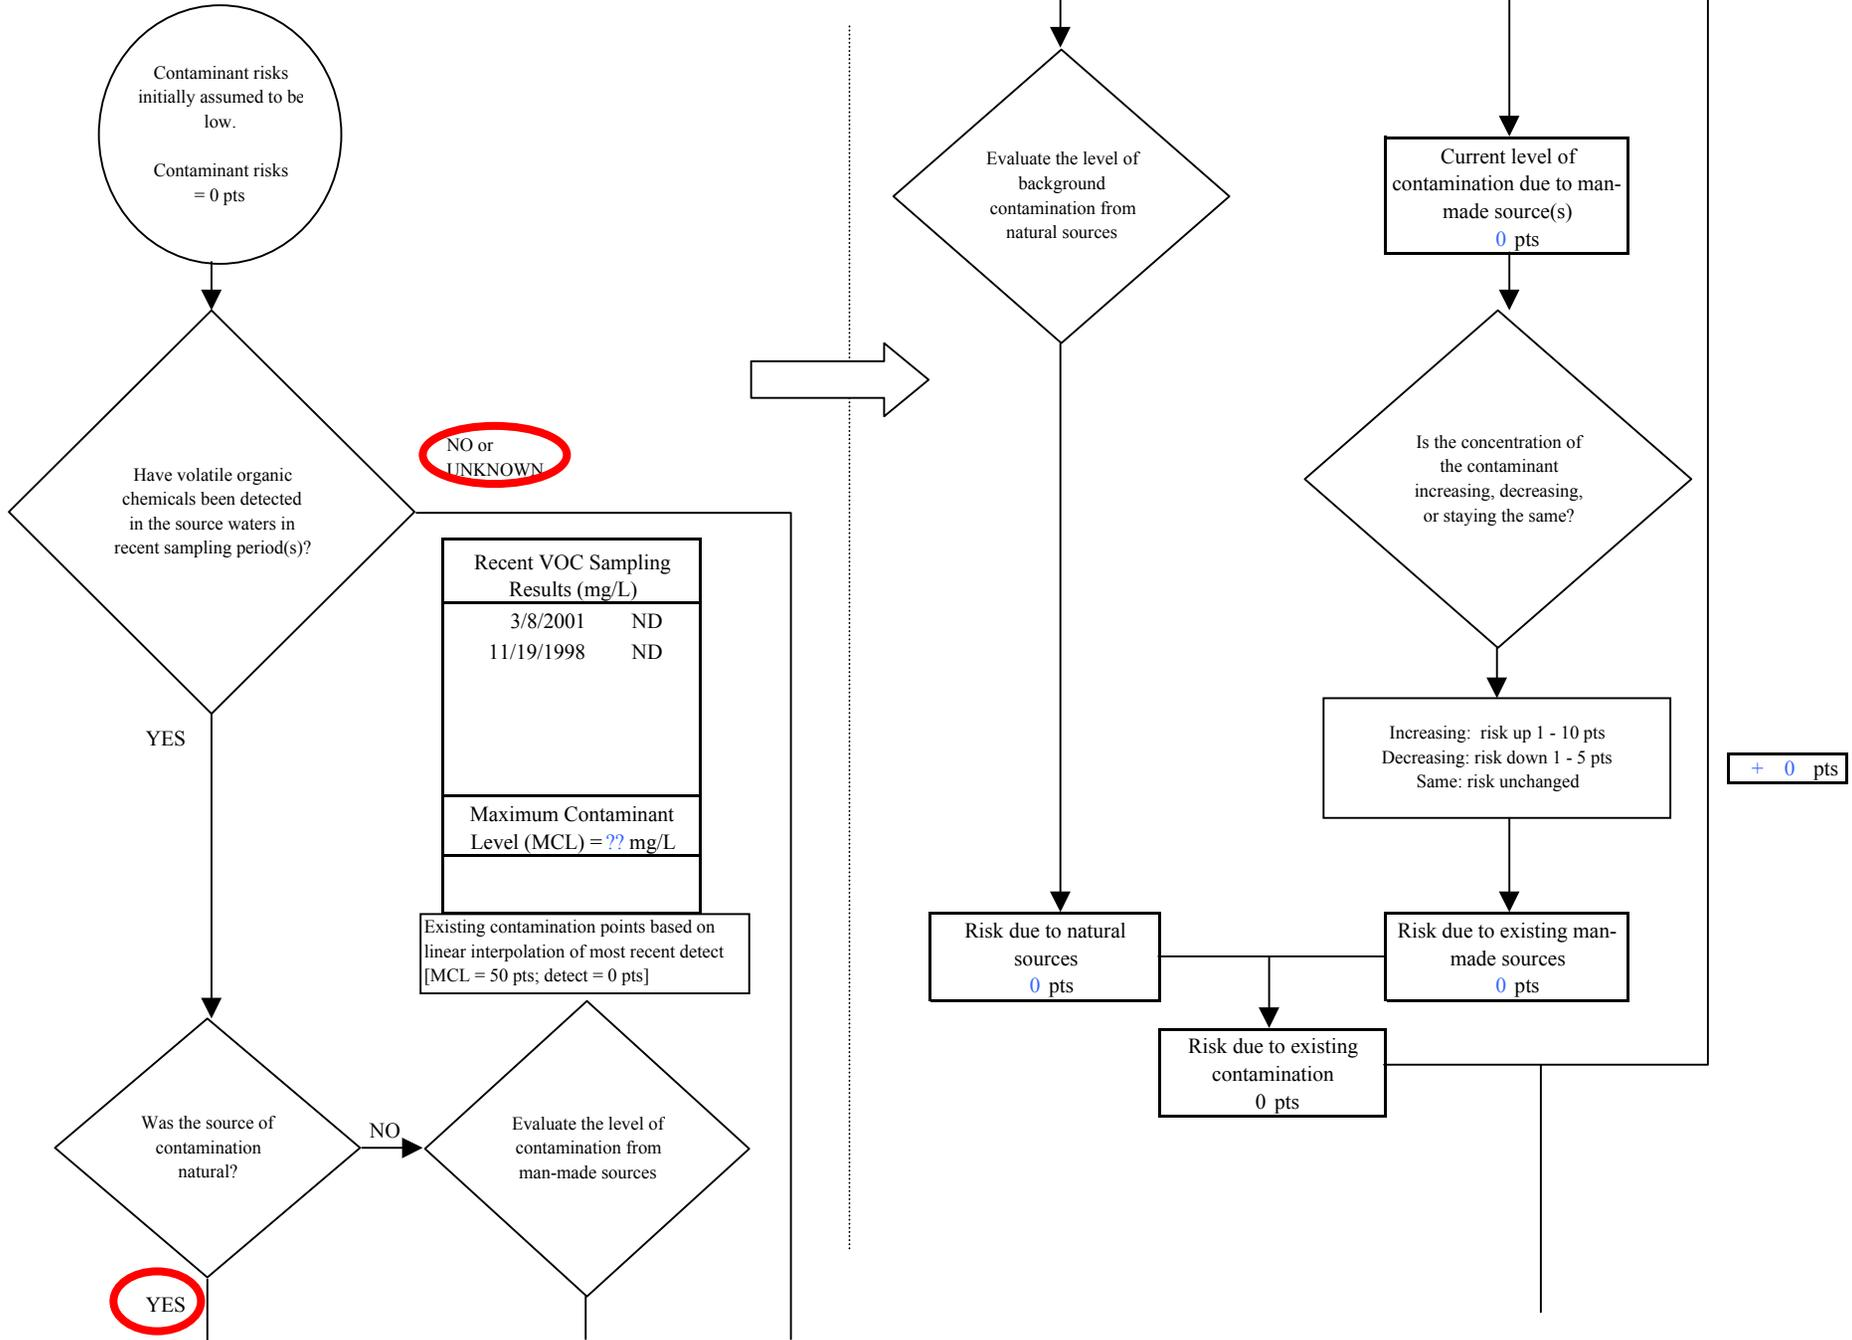


Chart 7. Contaminant risks for Sunridge Apartments - Volatile Organic Chemicals

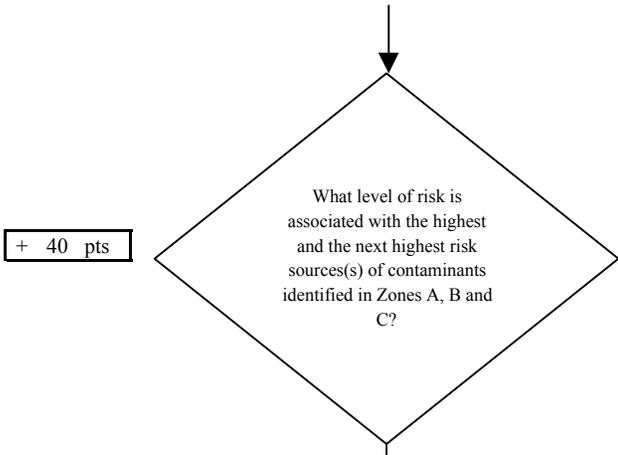

Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	19	19
Medium(s)	0	9	9
Low(s)	2	24	26

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 40

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

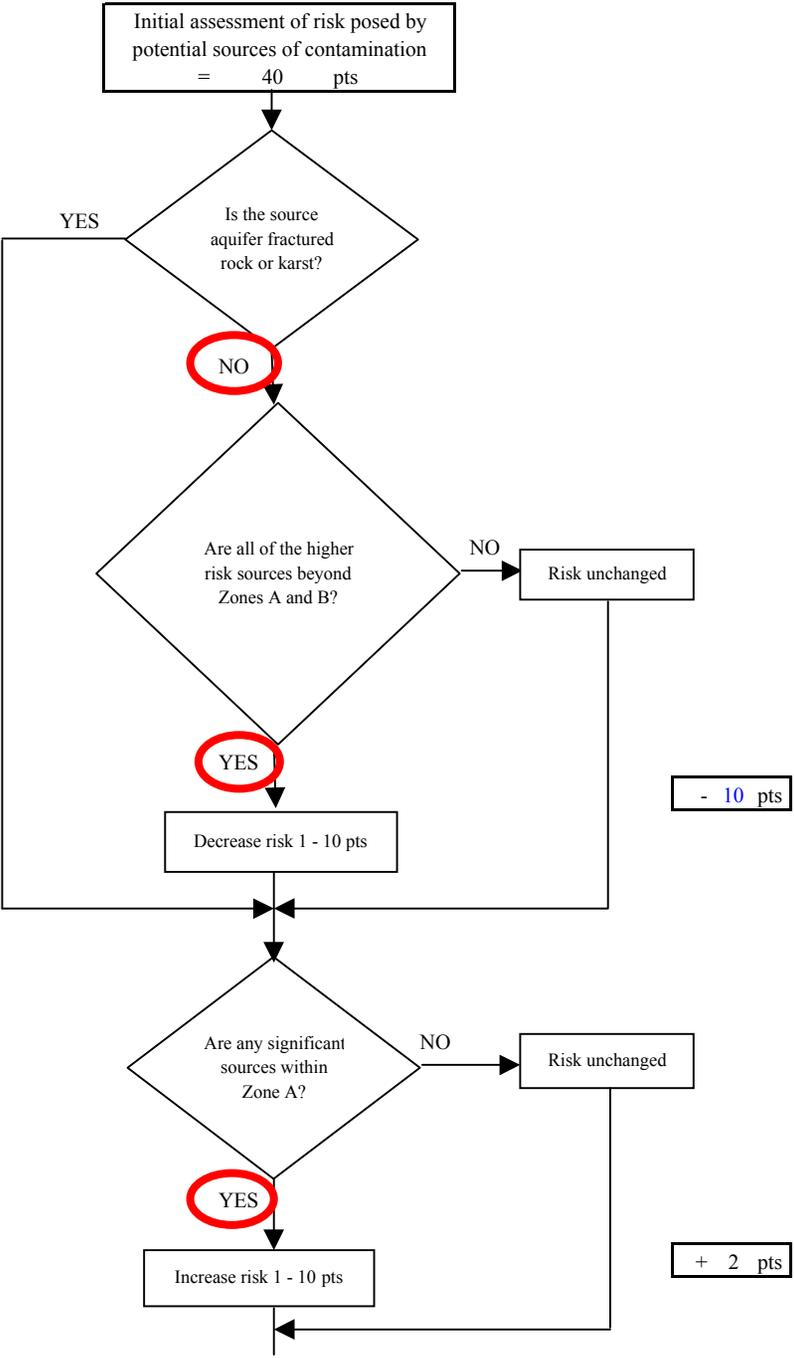



Chart 7. Contaminant risks for Sunridge Apartments - Volatile Organic Chemicals

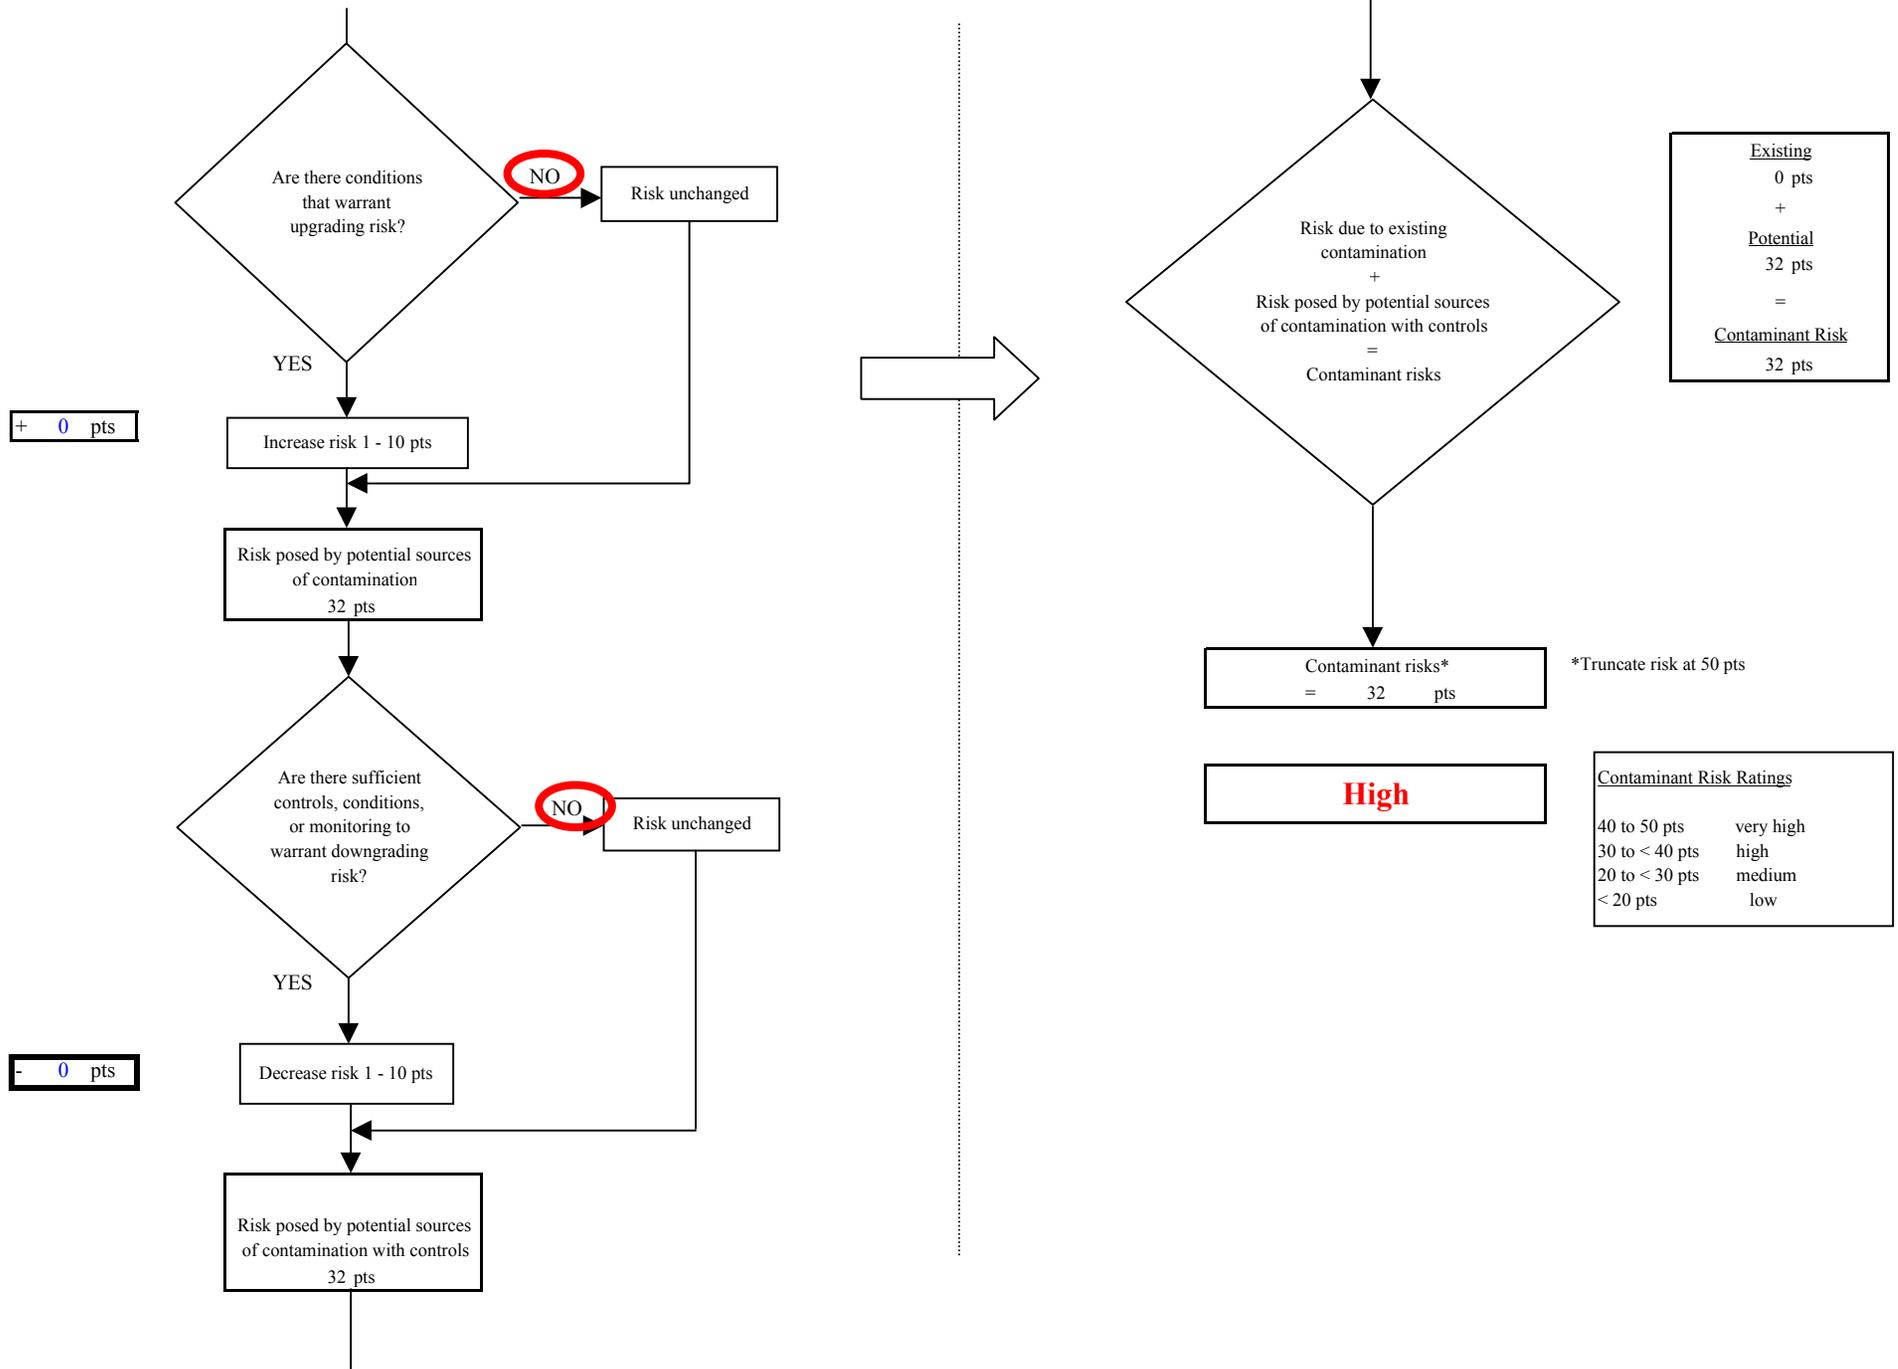


Chart 8. Vulnerability analysis for Sunridge Apartments - Volatile Organic Chemicals

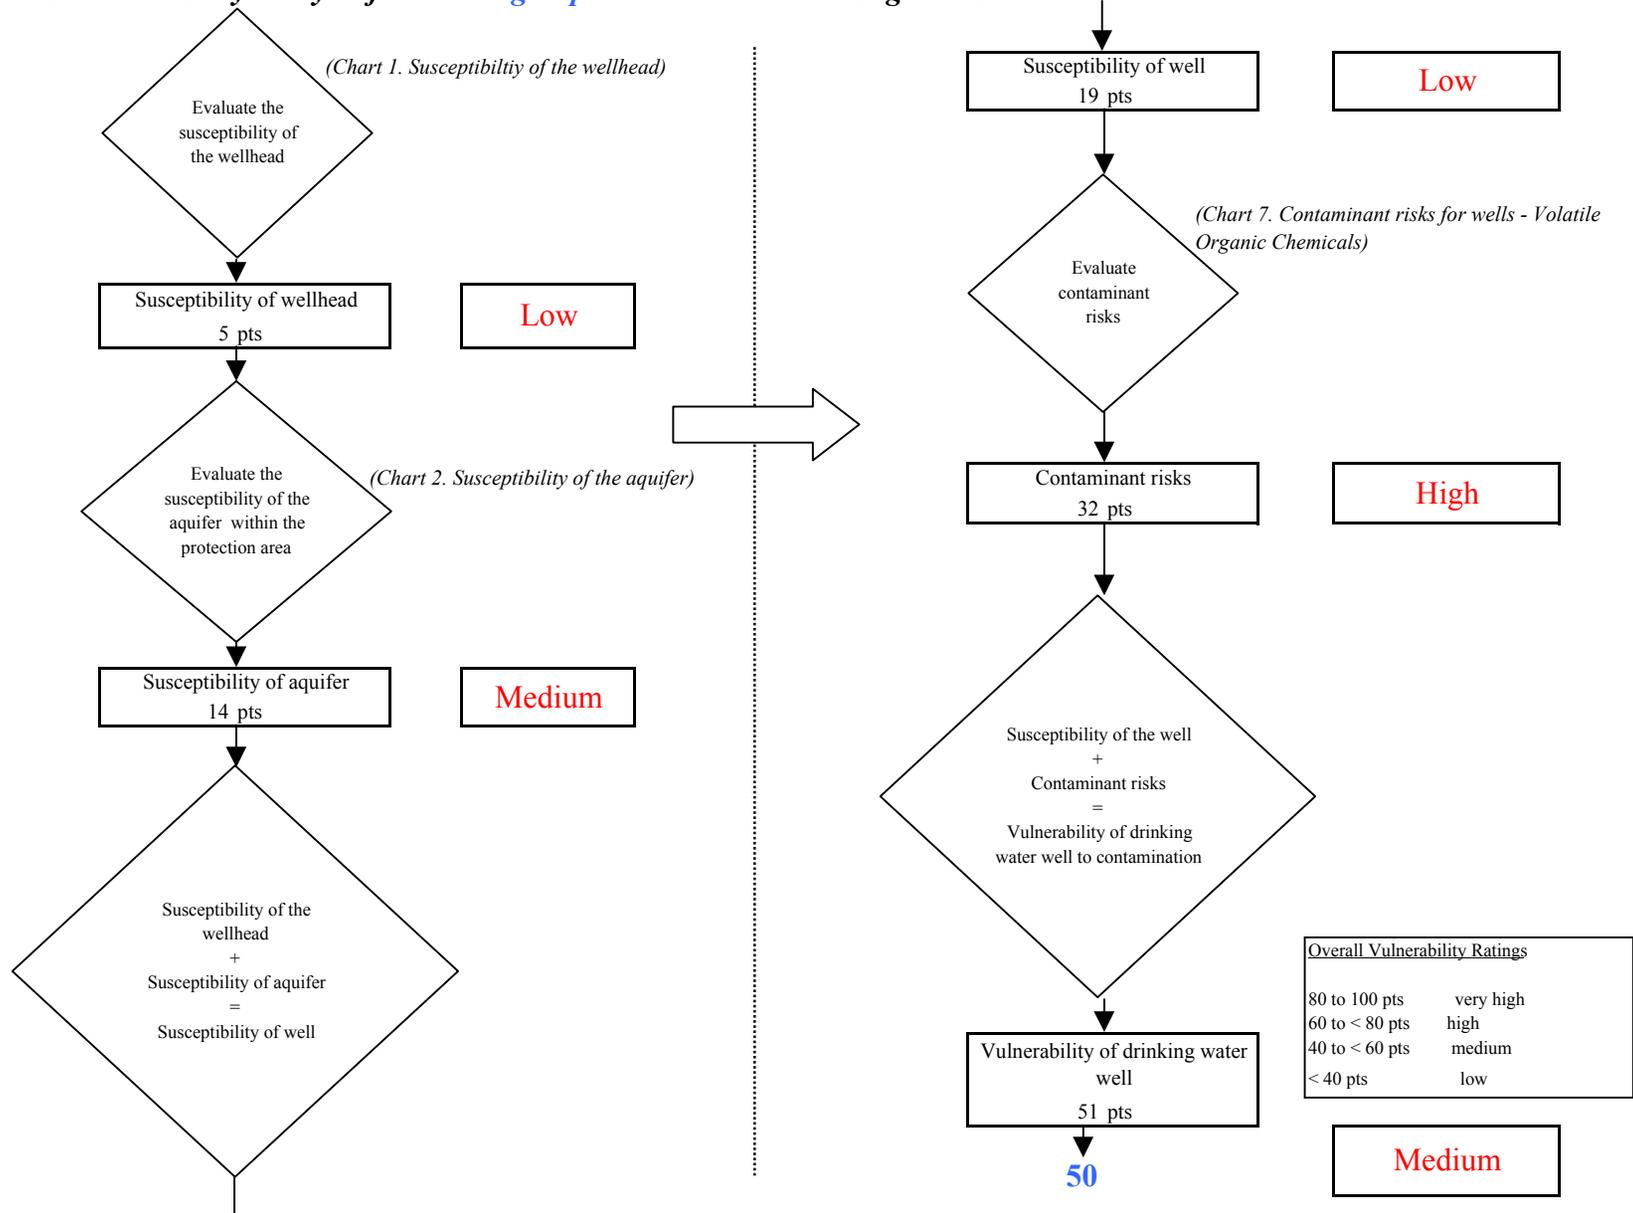


Chart 9. Contaminant risks for Sunridge Apartments - Heavy Metals, Cyanide and Other Inorganic Chemicals


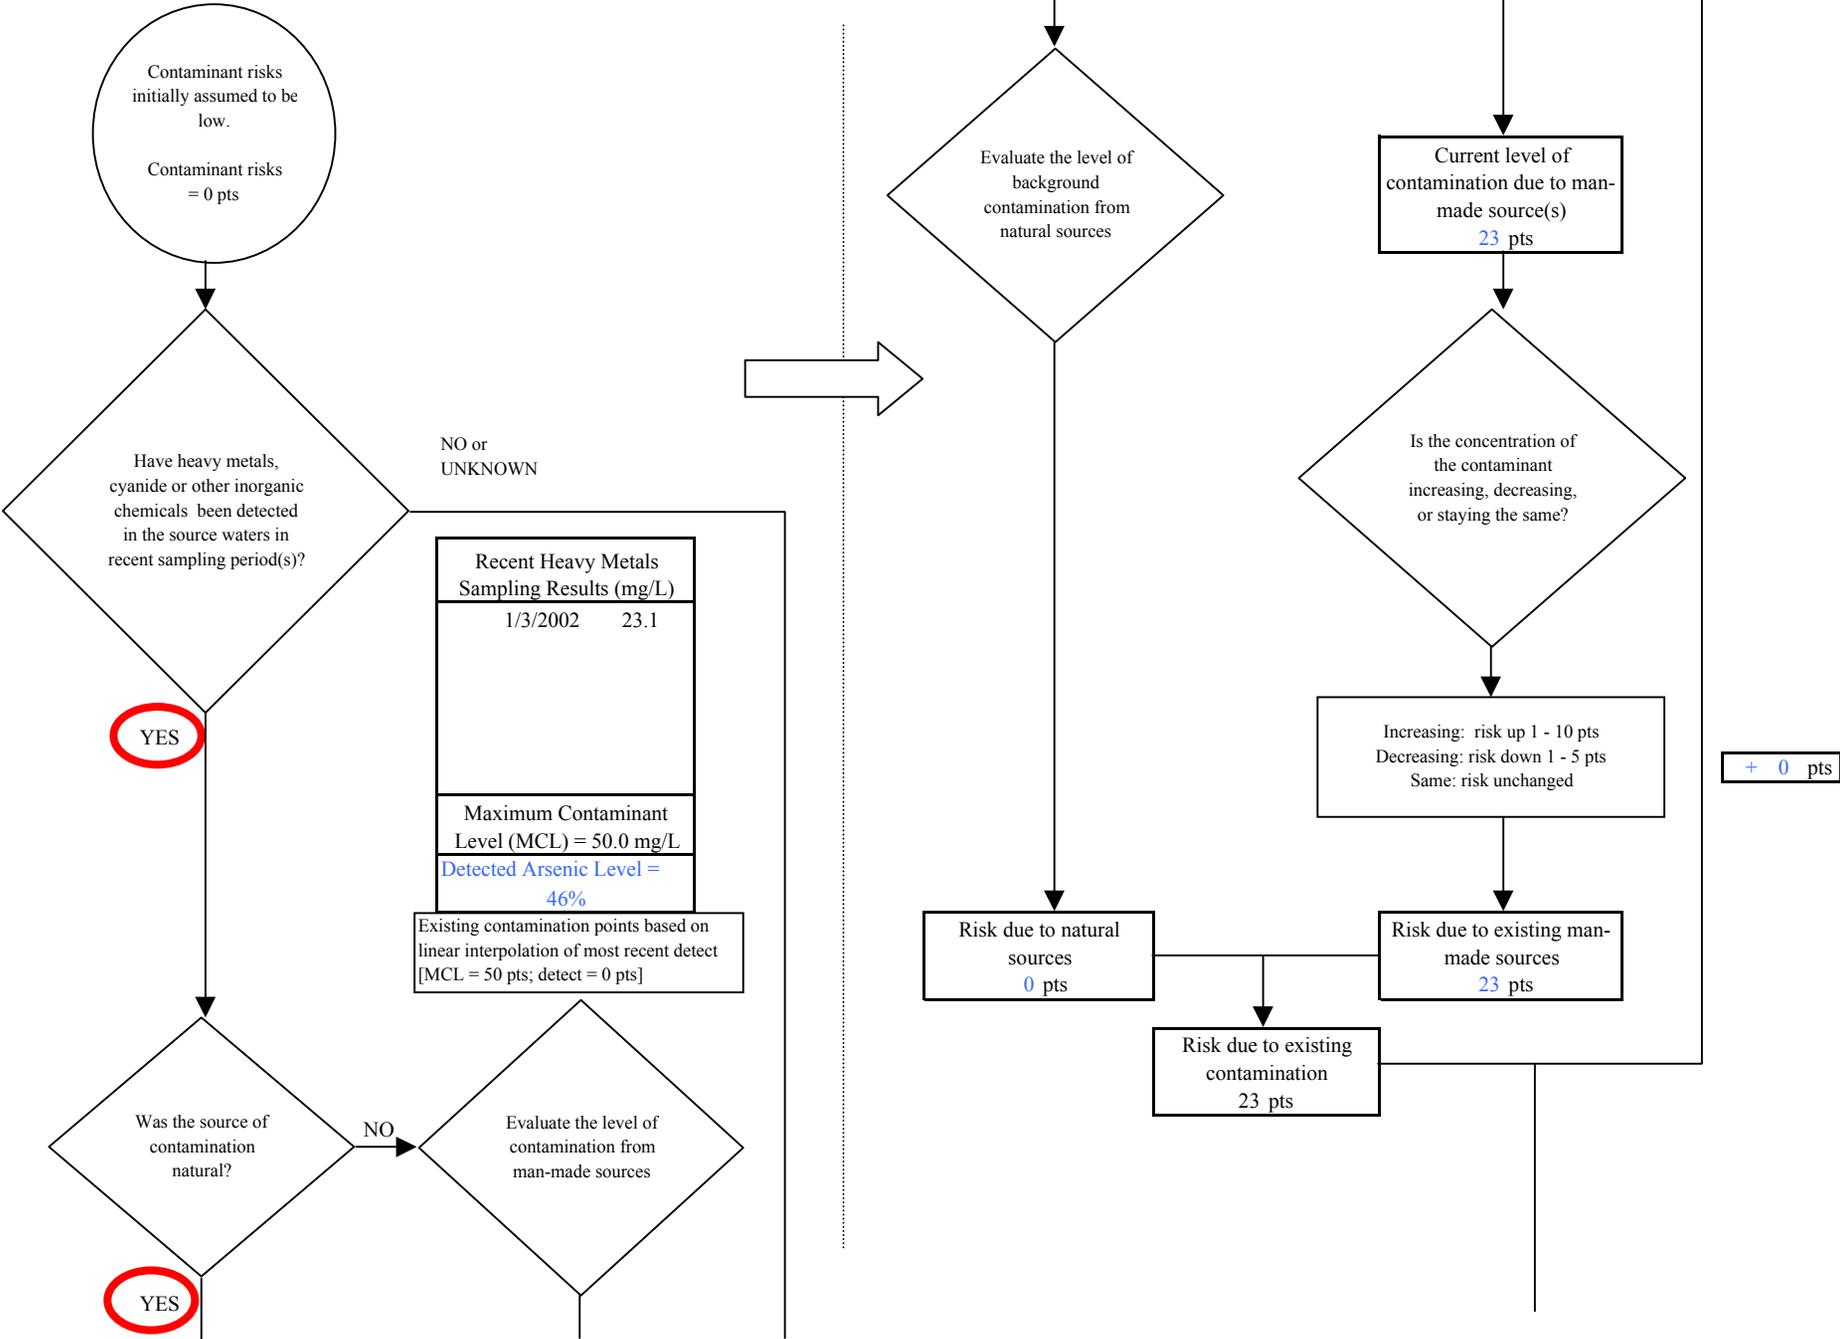


Chart 9. Contaminant risks for Sunridge Apartments - Heavy Metals, Cyanide and Other Inorganic Chemicals

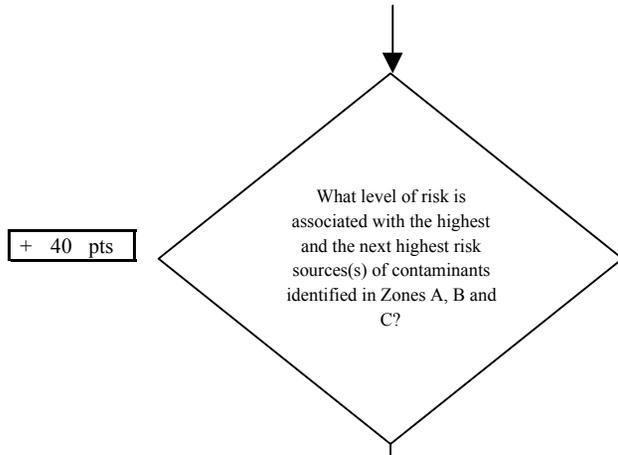

Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	4	4
Medium(s)	0	11	11
Low(s)	2	31	33

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 40

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

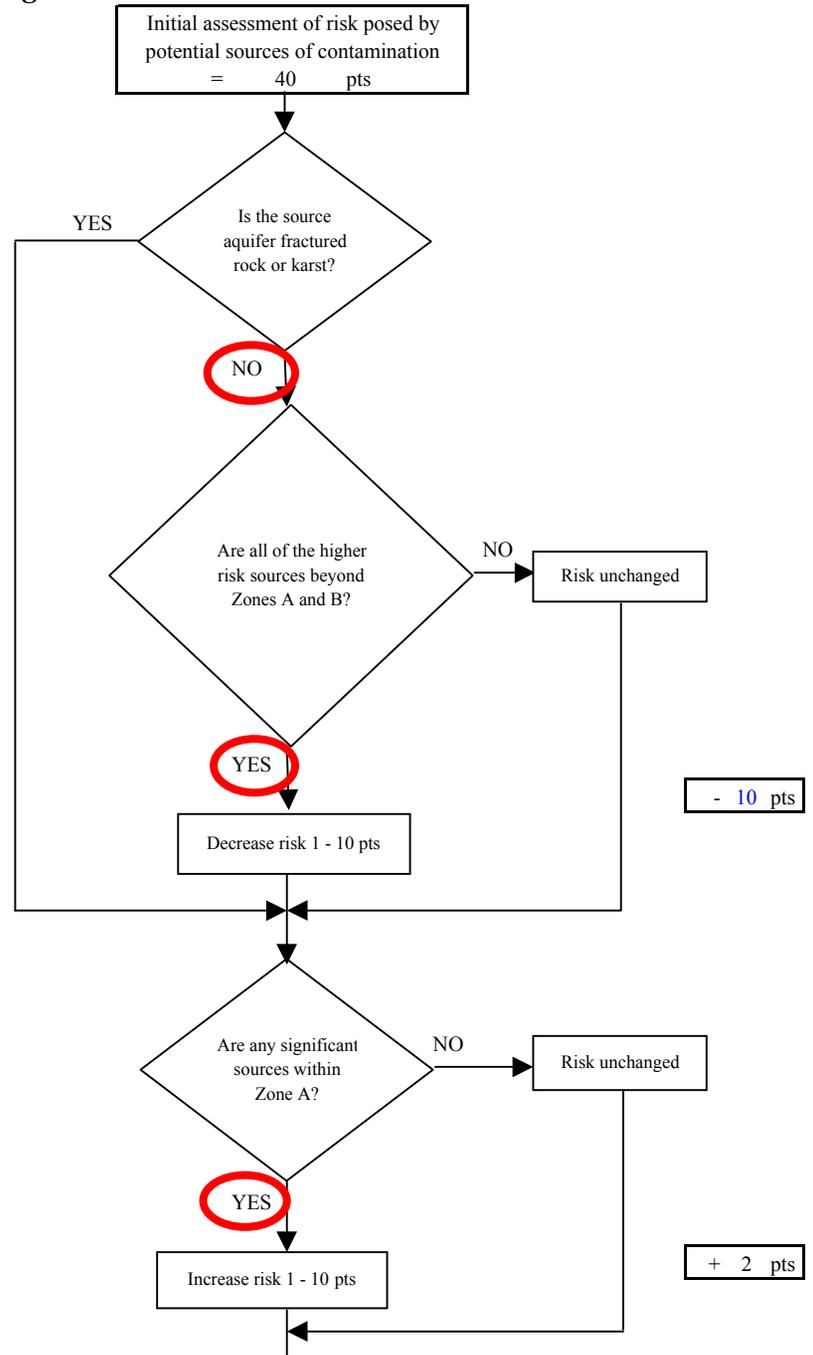



Chart 9. Contaminant risks for Sunridge Apartments - Heavy Metals, Cyanide and Other Inorganic Chemicals

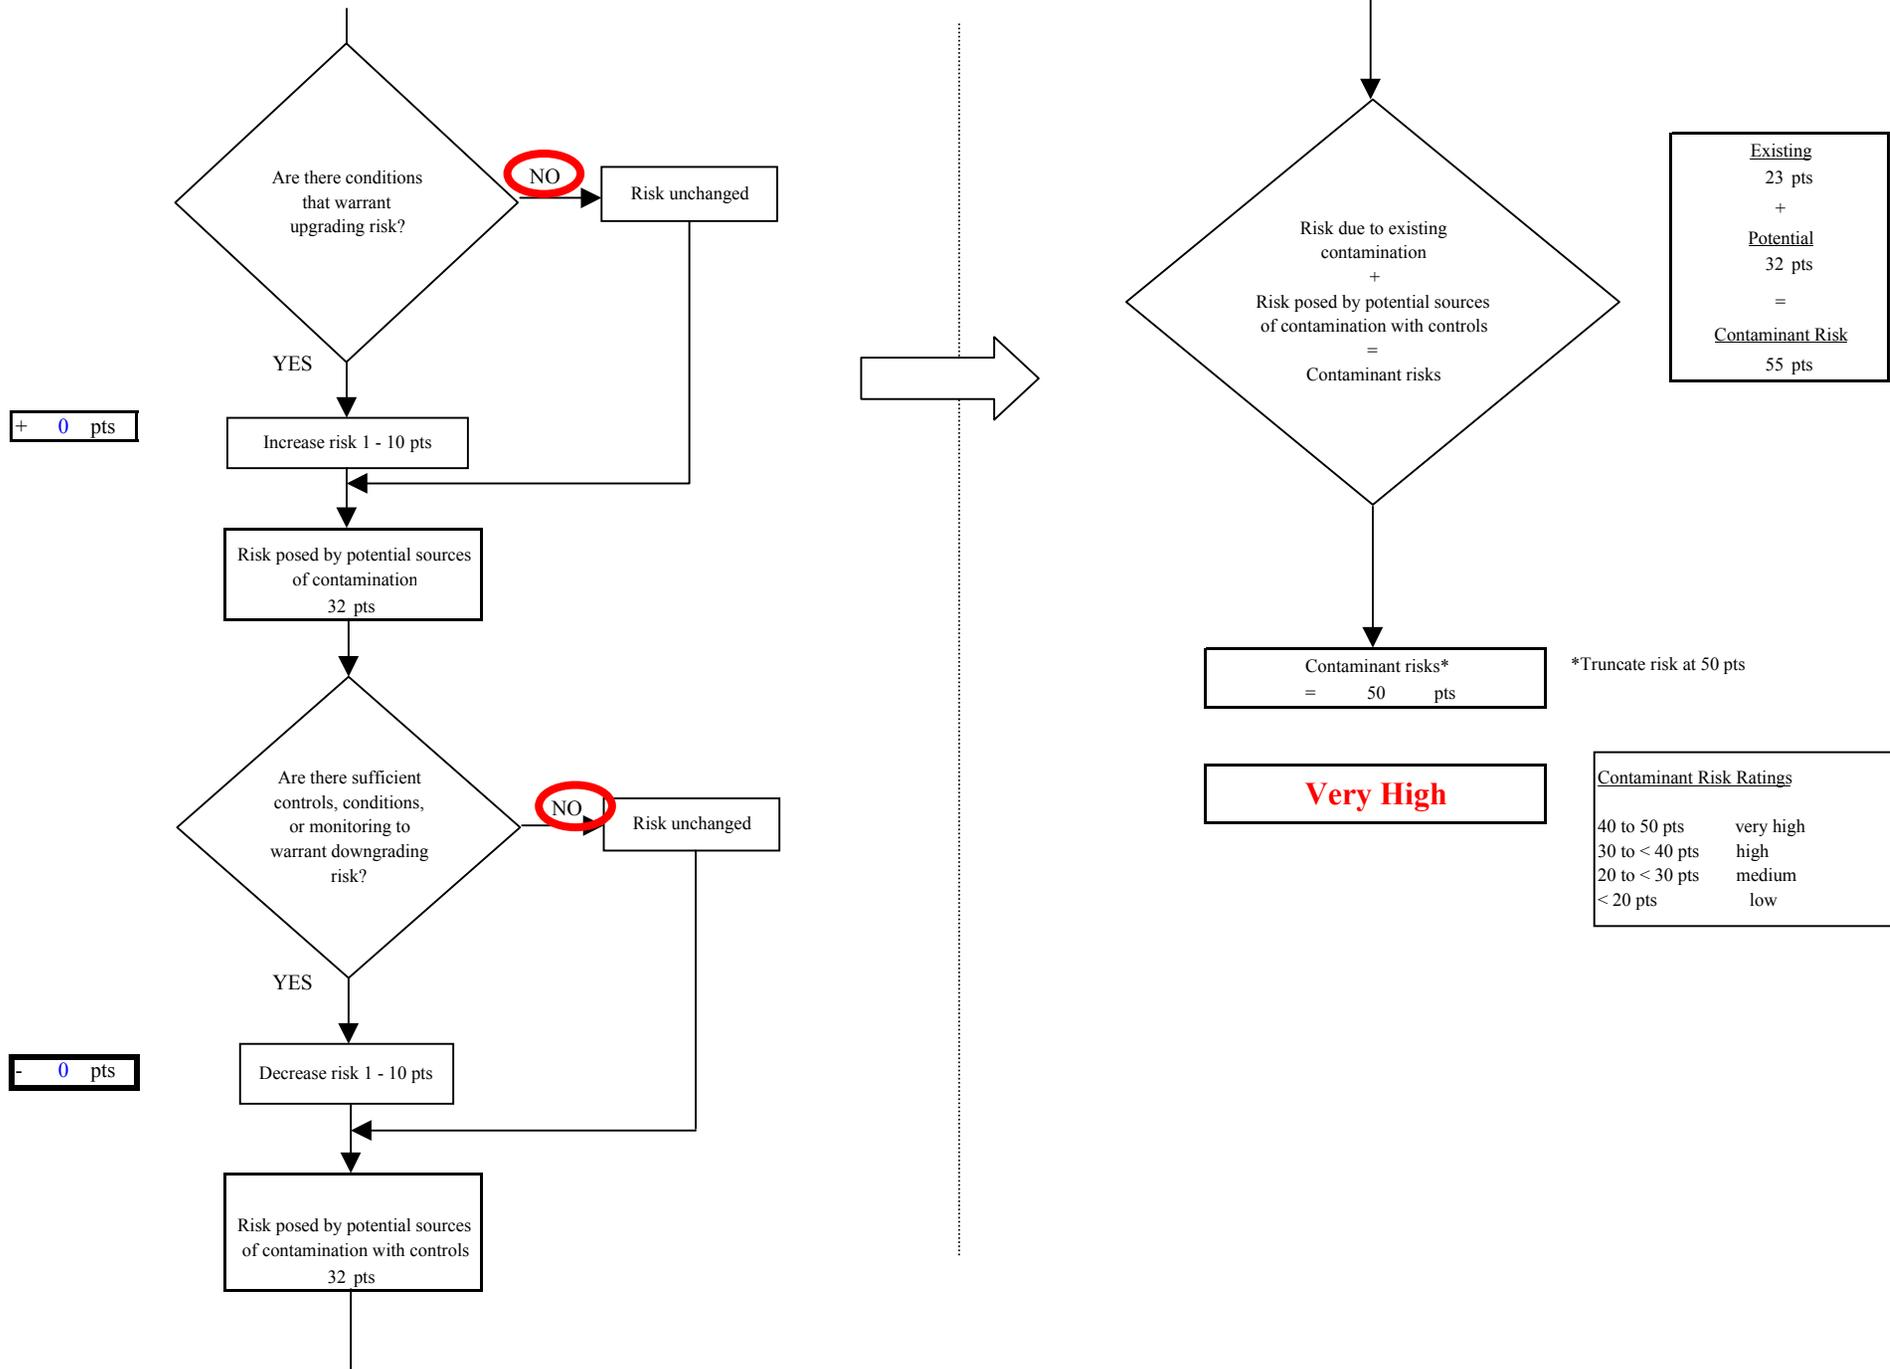


Chart 10. Vulnerability analysis for Sunridge Apartments - Heavy Metals, Cyanide and Other Inorganic Chemicals

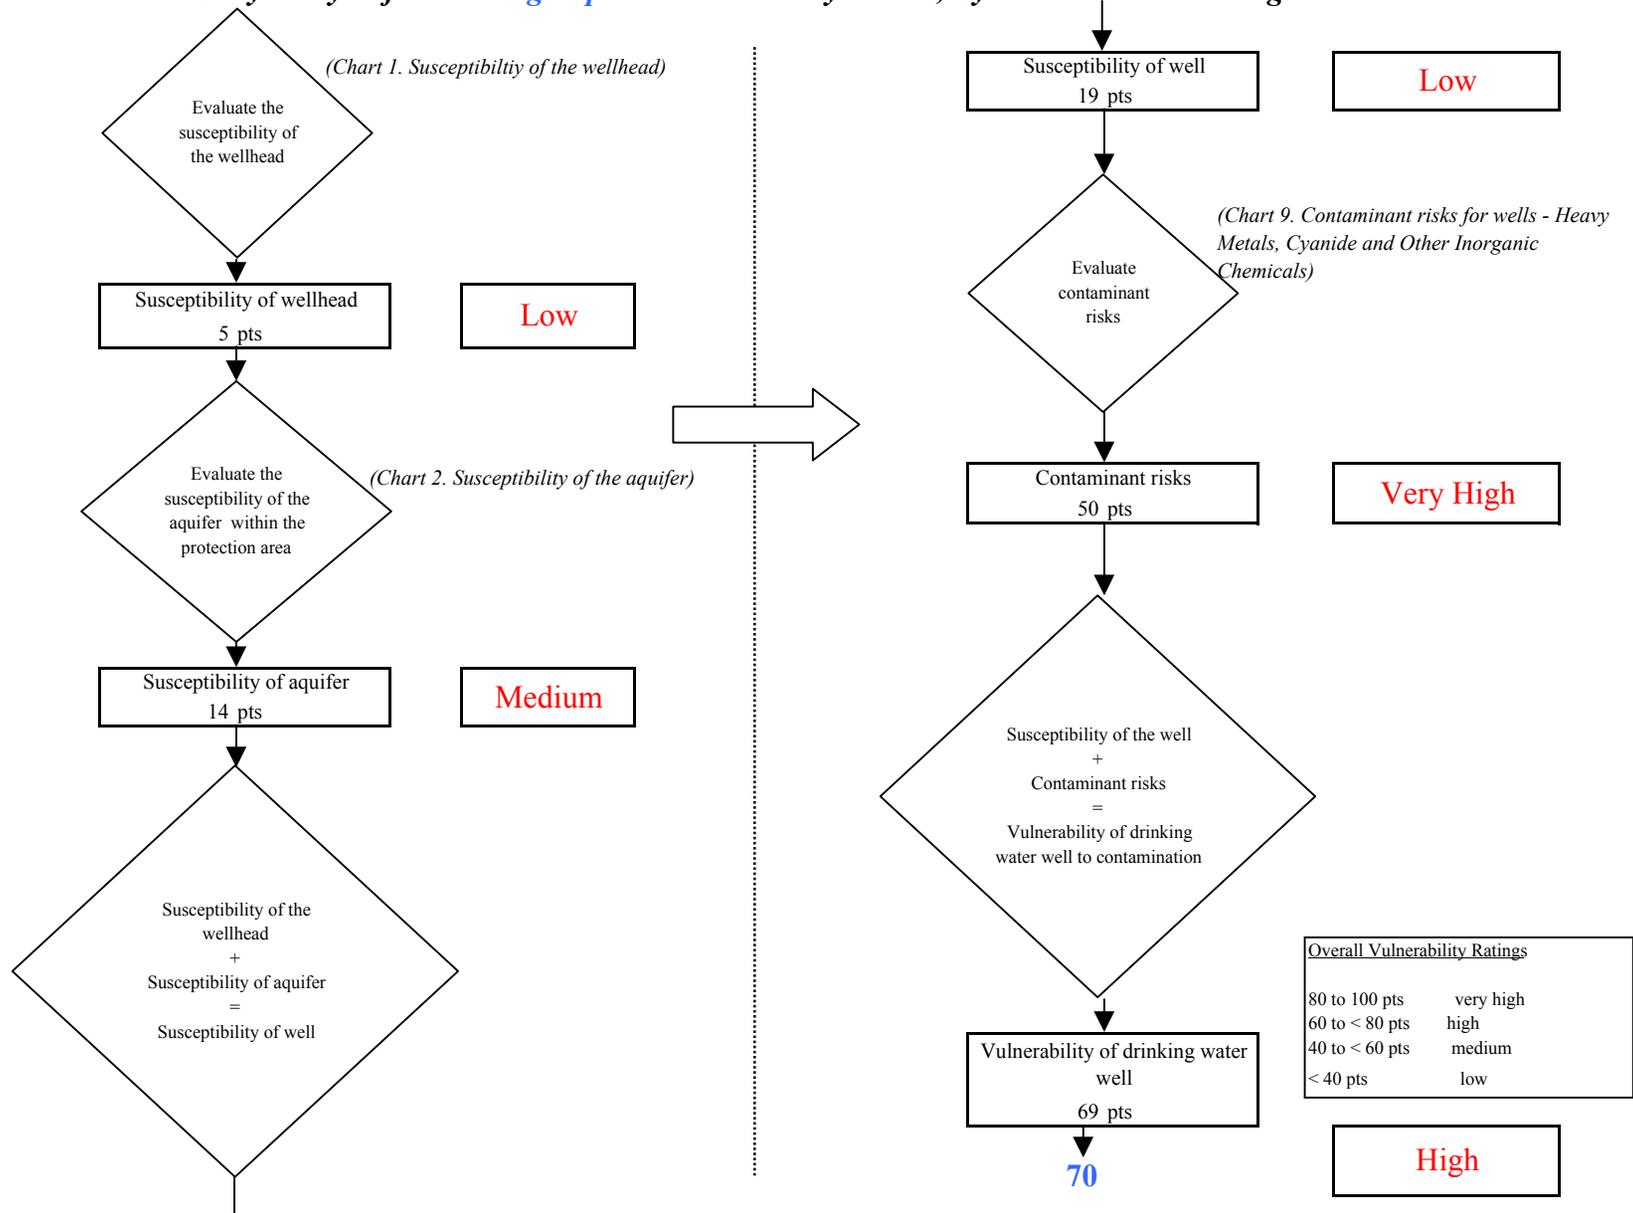


Chart 11. Contaminant risks for Sunridge Apartments - Synthetic Organic Chemicals


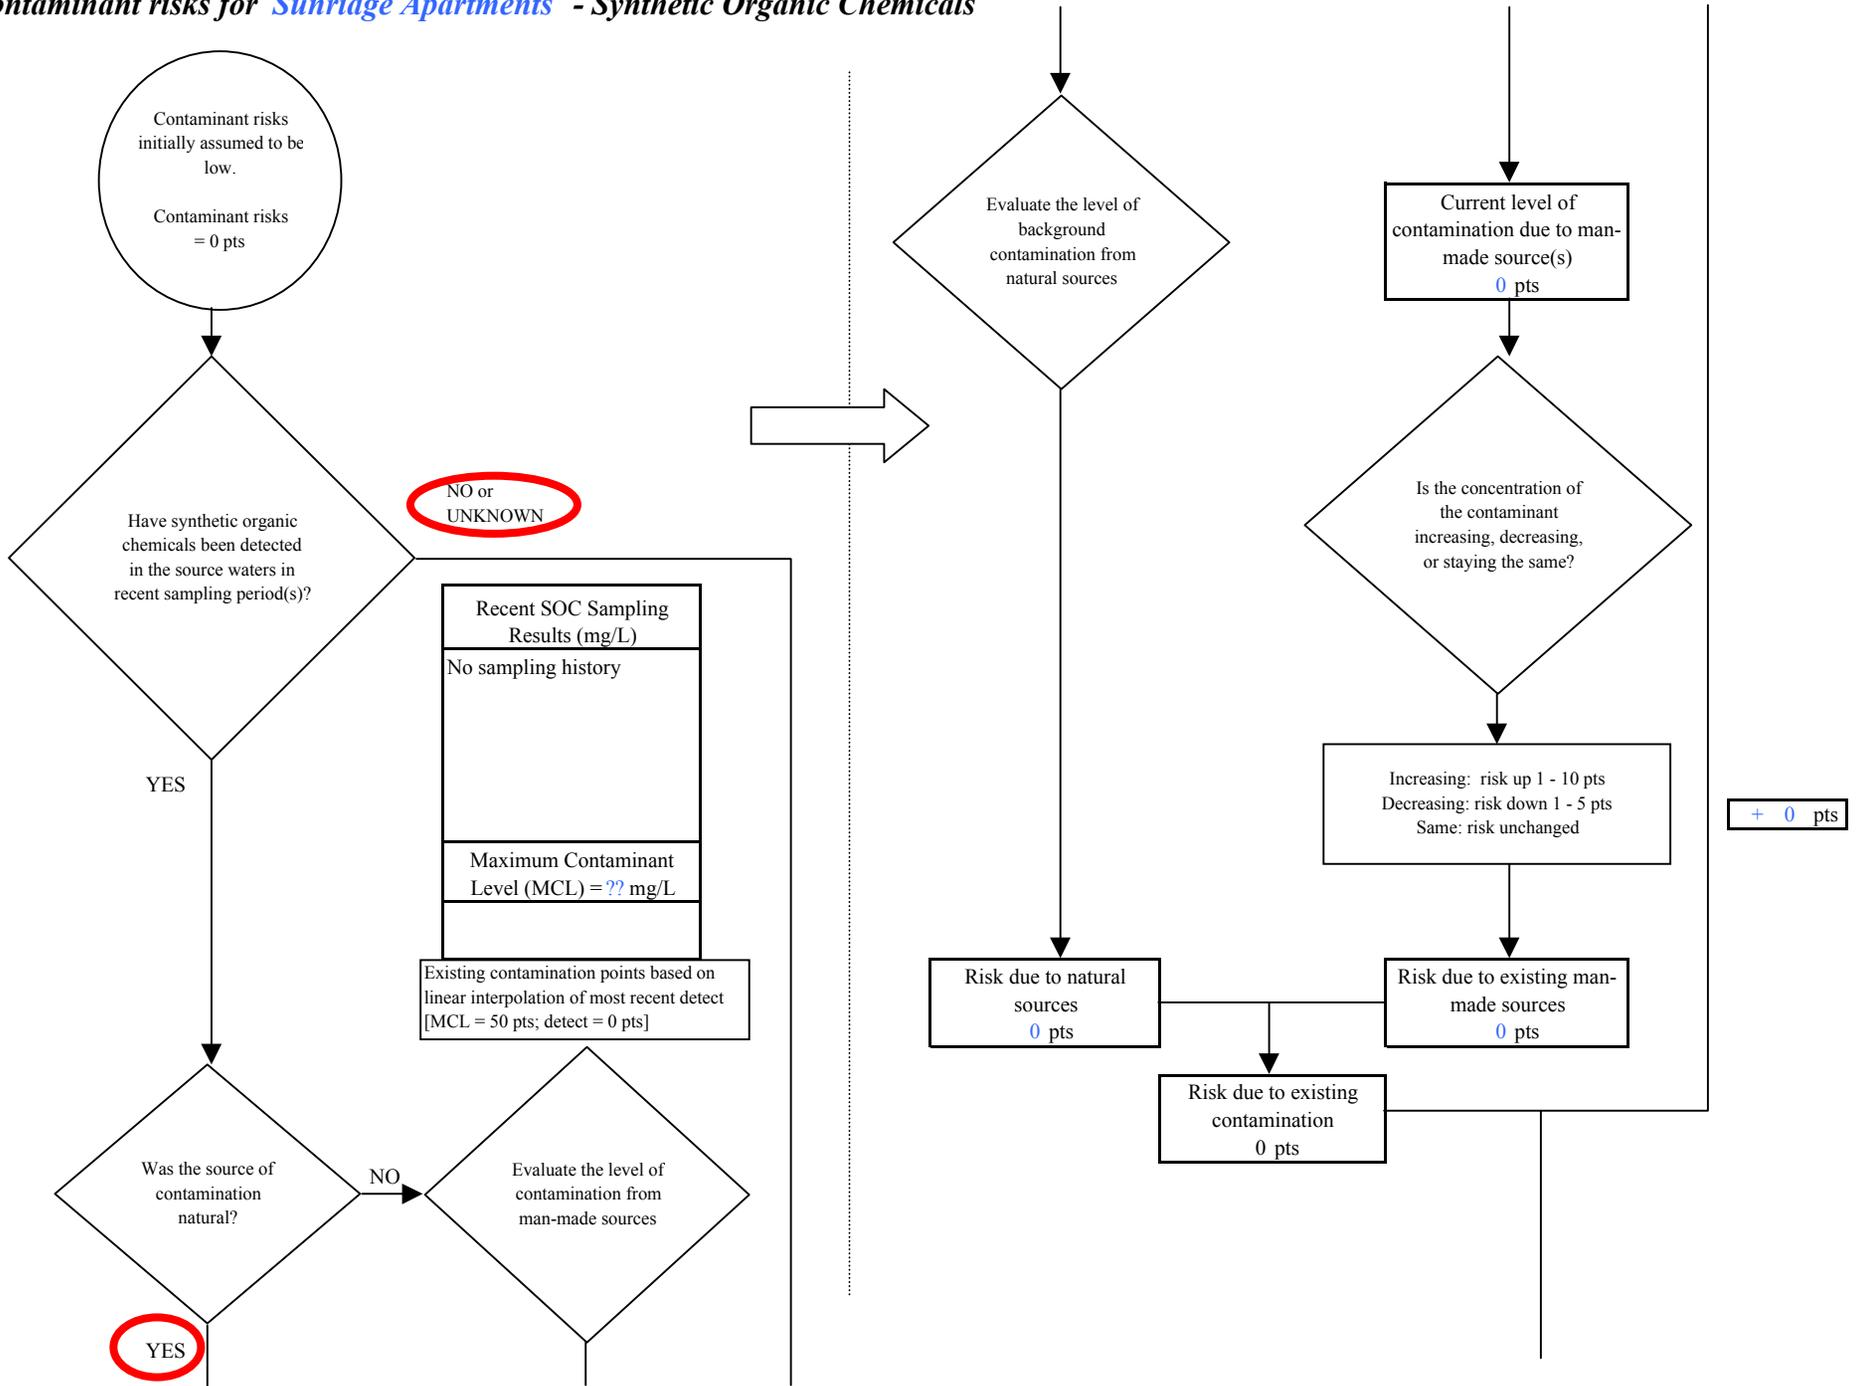


Chart 11. Contaminant risks for Sunridge Apartments - Synthetic Organic Chemicals

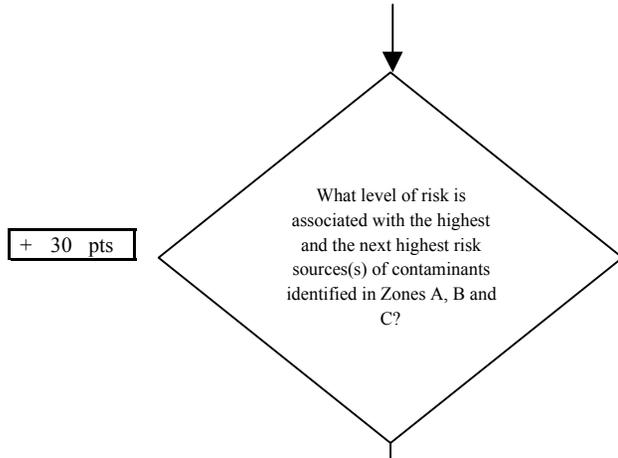

Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	1	1
Medium(s)	0	1	1
Low(s)	1	17	18

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 30

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

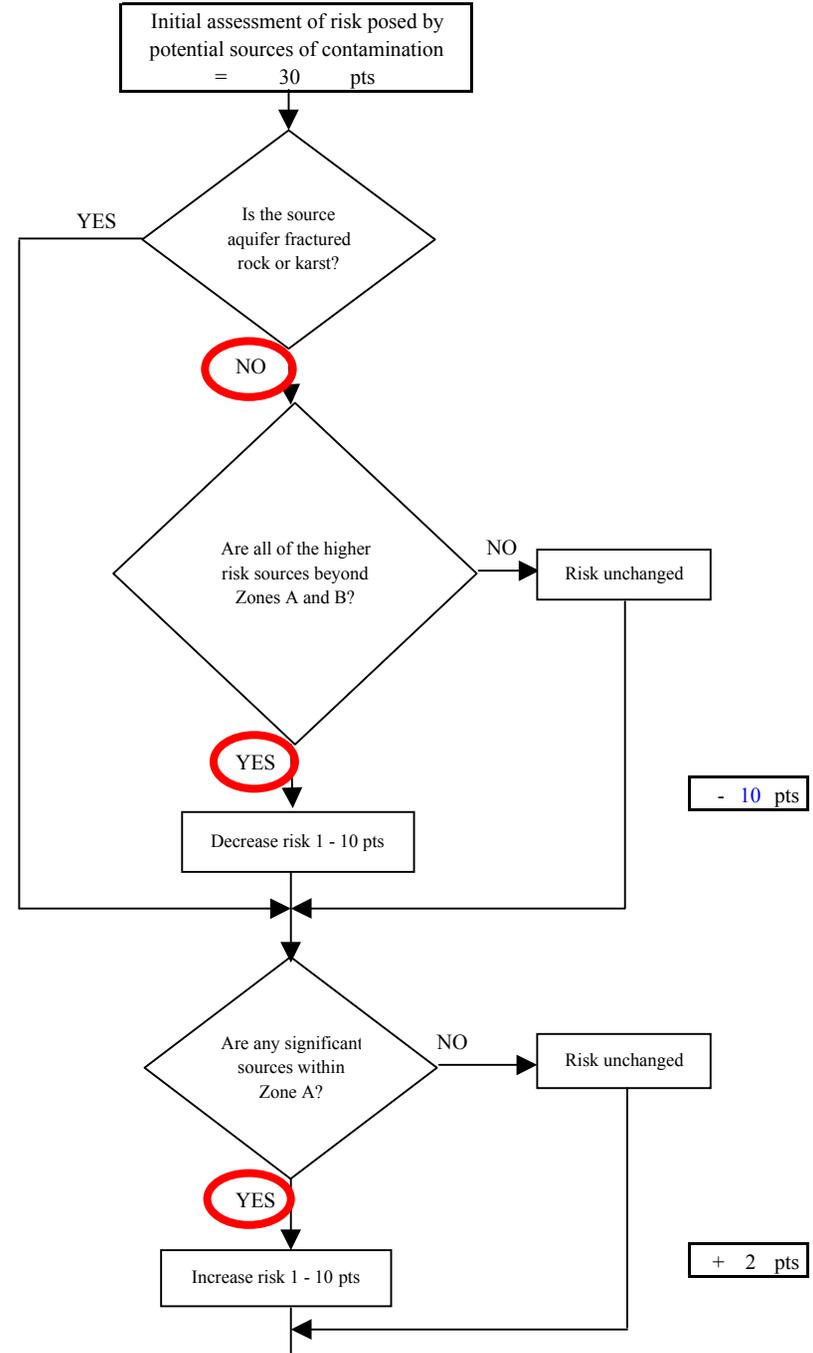



Chart 11. Contaminant risks for Sunridge Apartments - Synthetic Organic Chemicals

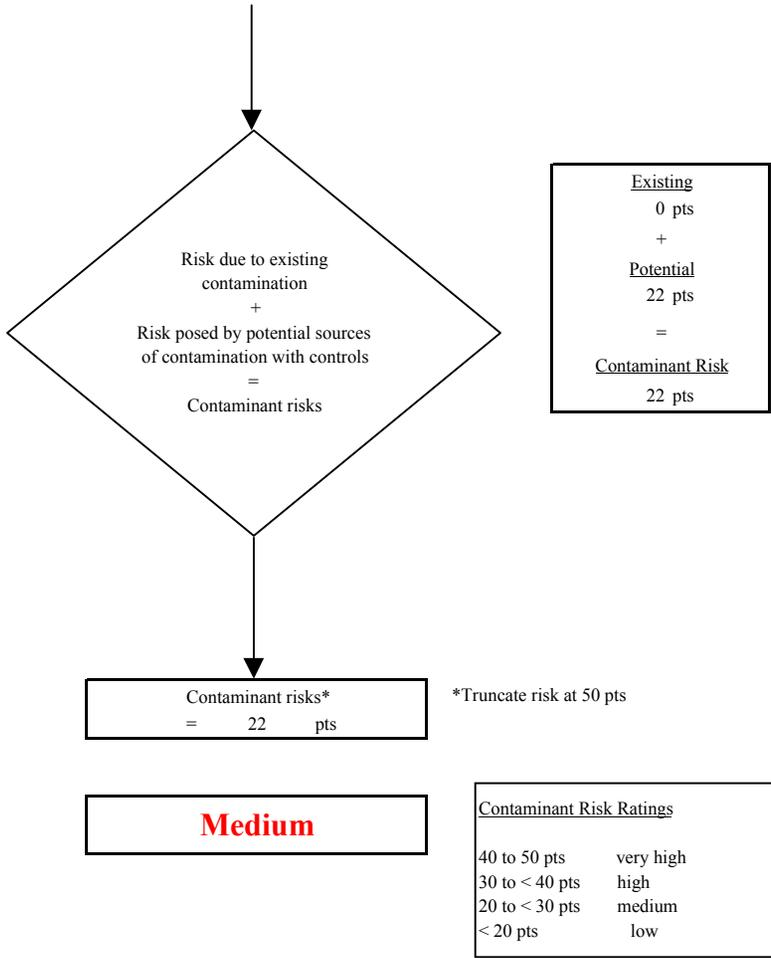

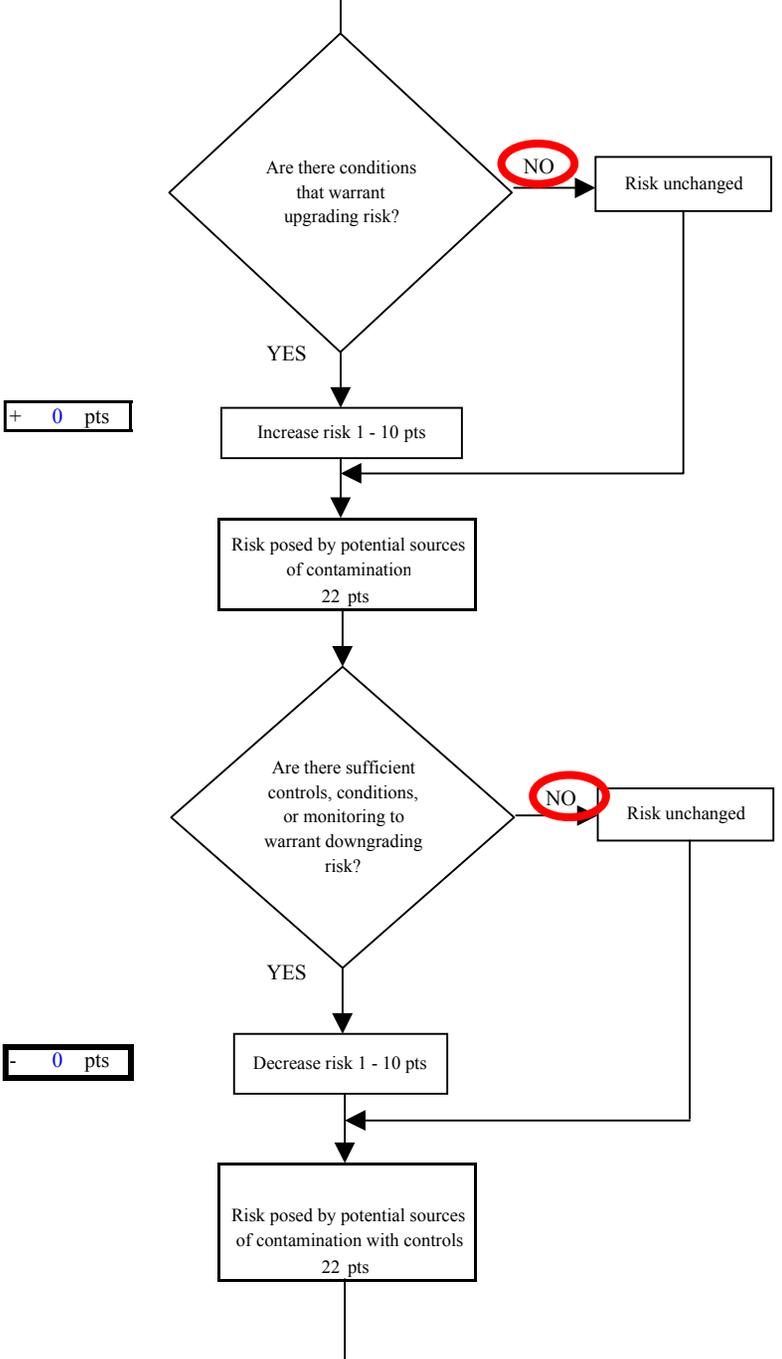


Chart 12. Vulnerability analysis for Sunridge Apartments - Synthetic Organic Chemicals

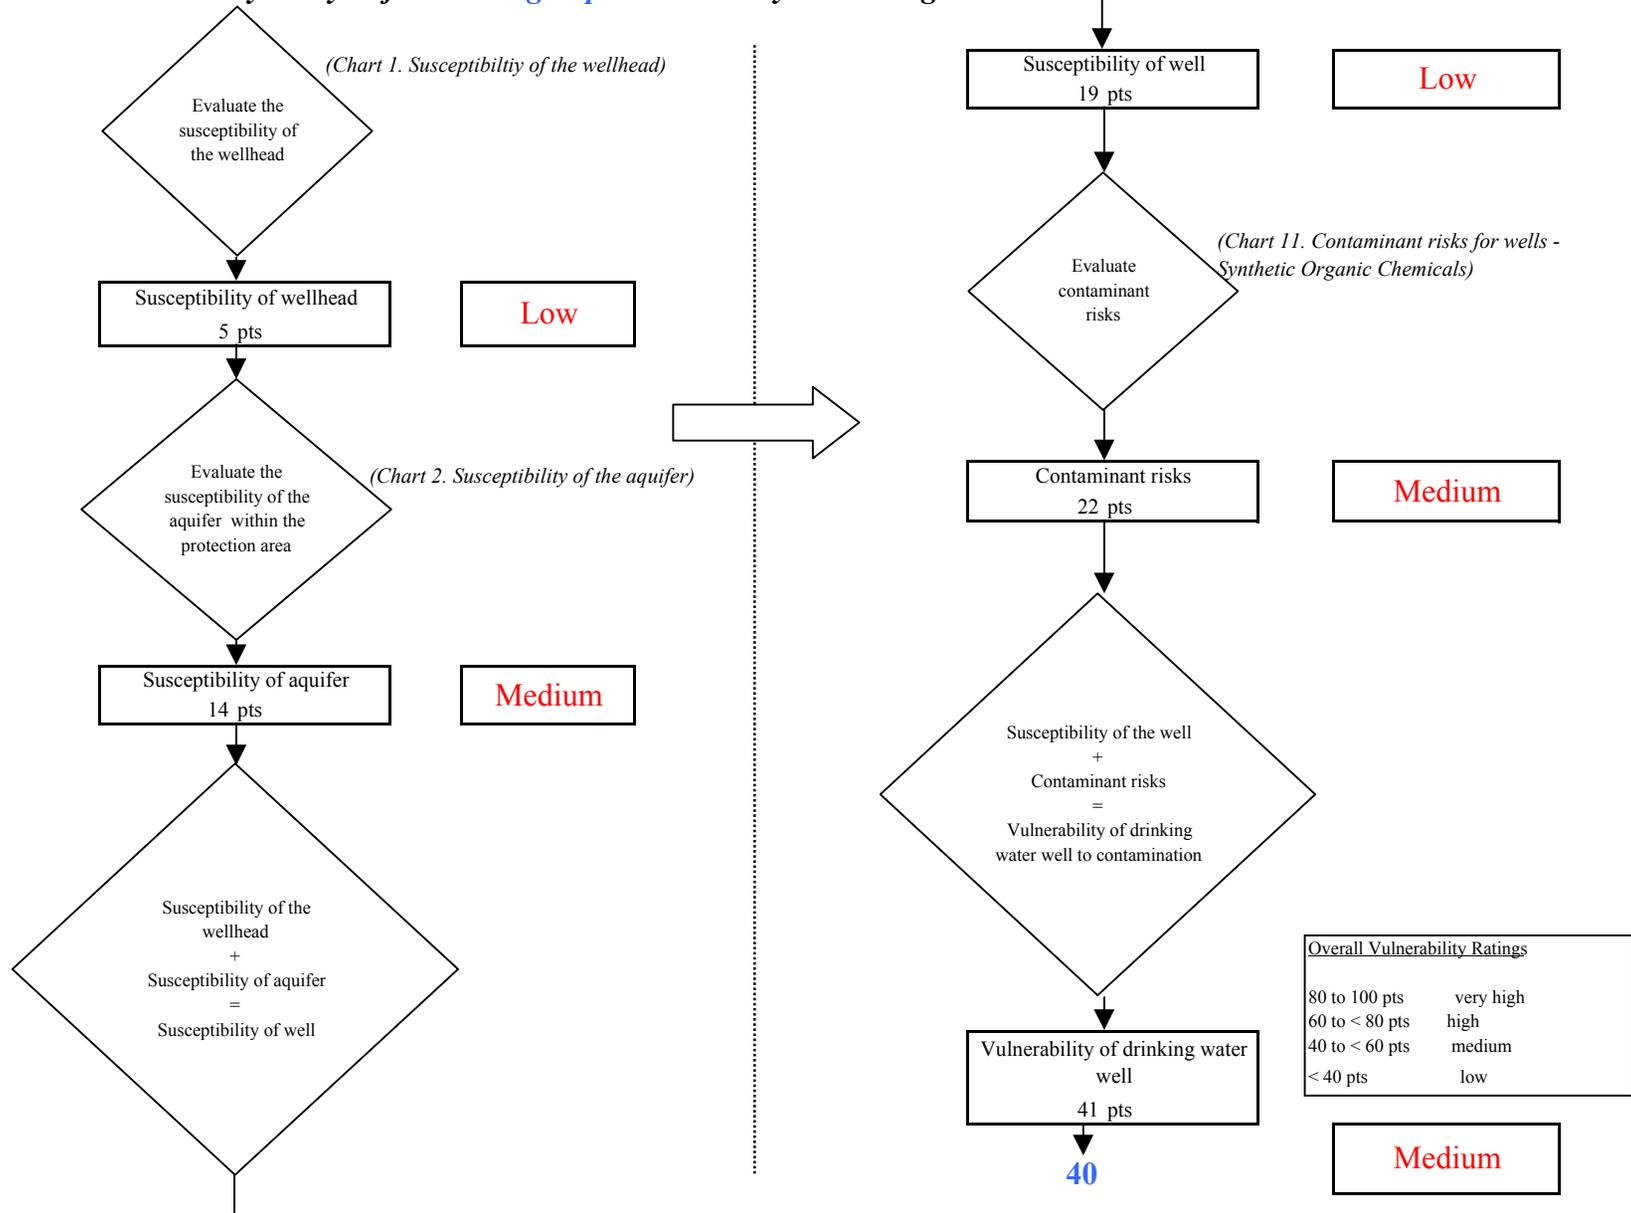


Chart 13. Contaminant risks for Sunridge Apartments - Other Organic Chemicals

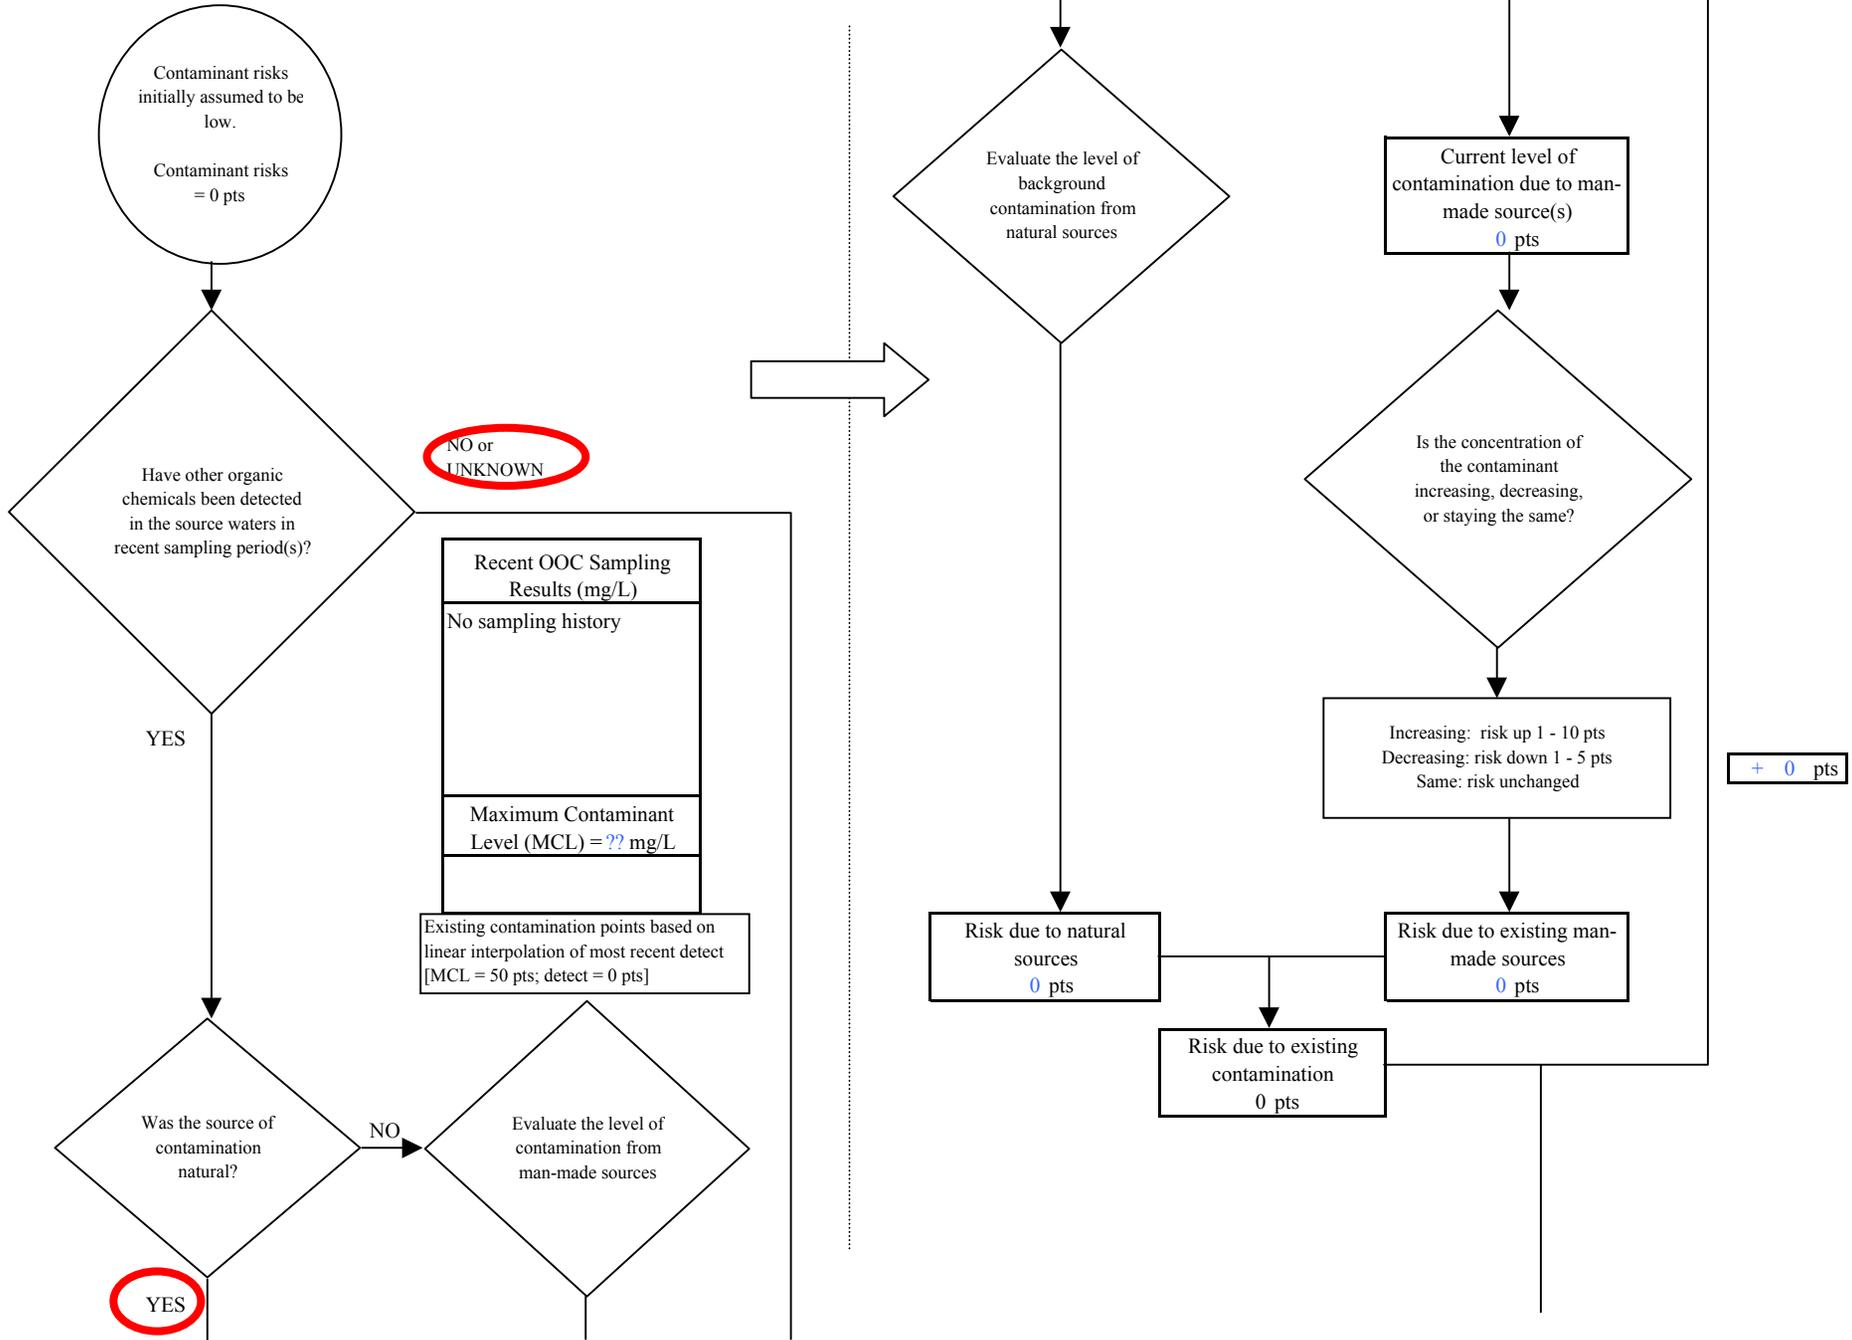


Chart 13. Contaminant risks for Sunridge Apartments - Other Organic Chemicals

What level of risk is associated with the highest and the next highest risk sources(s) of contaminants identified in Zones A, B and C?

+ 40 pts

Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	2	2
Medium(s)	0	10	10
Low(s)	2	10	12

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	----
MEDIUM	----	≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH	----	----	≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH	----	----	----	≥ 1 source + 10 pts

Matrix Score 40

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

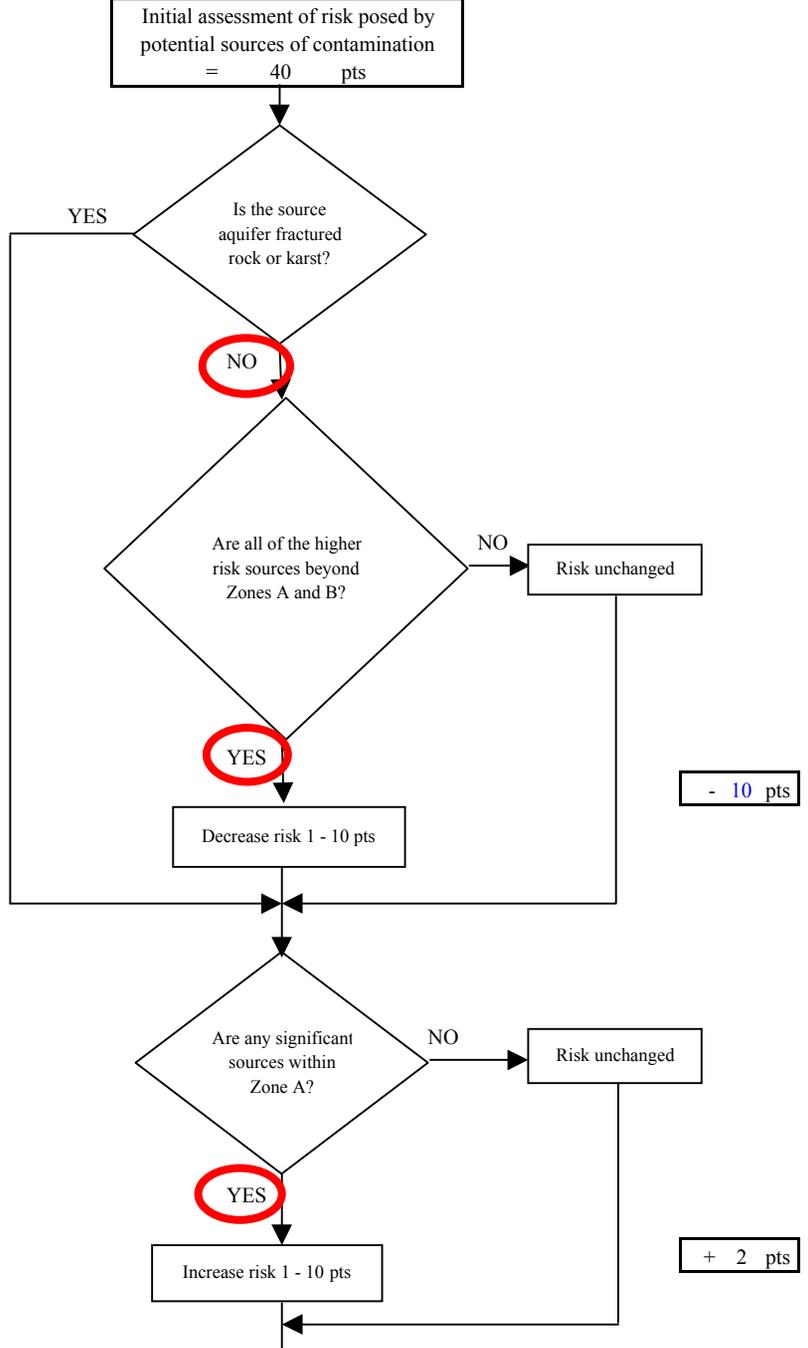



Chart 13. Contaminant risks for Sunridge Apartments - Other Organic Chemicals

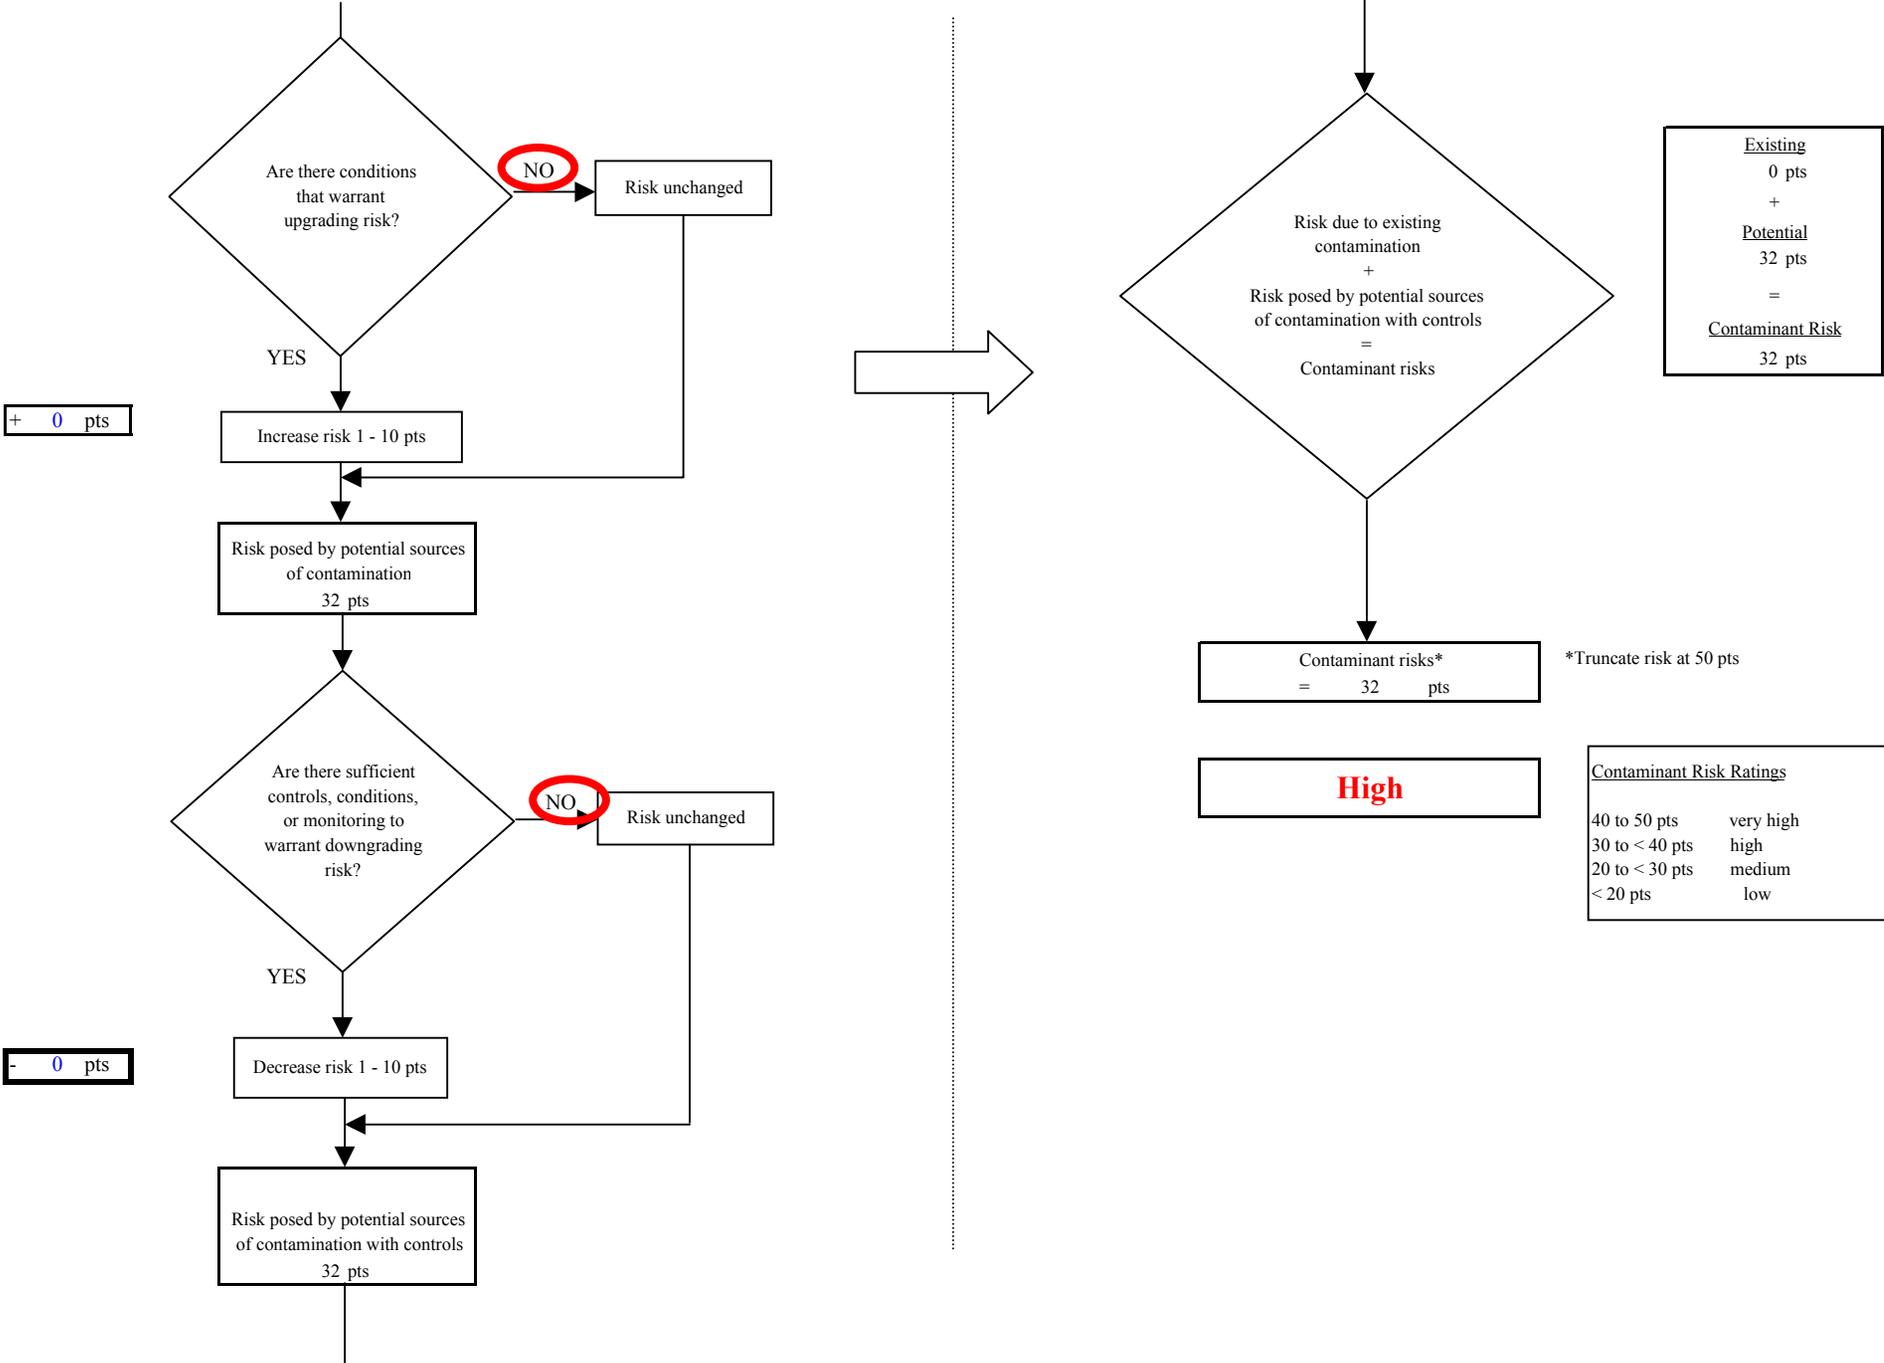


Chart 14. Vulnerability analysis for Sunridge Apartments - Other Organic Chemicals

