



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability Assessment for SWSD William Nelson School Drinking Water System, Ekwok, Alaska

PWSID # 260171.001

April 2004

DRINKING WATER PROTECTION PROGRAM REPORT 1041 Alaska Department of Environmental Conservation

Source Water Assessment for SWSD William Nelson School Drinking Water System Ekwok, Alaska

PWSID # 260171.001

DRINKING WATER PROTECTION PROGRAM REPORT 1041

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

	SUMMARY1 NKING WATER SYSTEM1	INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES2
	VATER PROTECTION AREA2	RANKING OF CONTAMINANT RISKS
		S131EW
	TAI	BLES
Table 2. Susc	ceptibility	2
Table 3. Contable 4. Over	rall Vulnerability	3
	A DDEN	ADICEC
	APPE	NDICES
APPENDIX	A. SWSD William Nelson School Dri	nking Water Protection Area (Map A)
	Contaminant Source Inventory and Bacteria and Viruses (Table 2) Contaminant Source Inventory and Nitrates/Nitrites (Table 3) Contaminant Source Inventory and Volatile Organic Chemicals (Table Contaminant Source Inventory and Heavy Metals, Cyanide and Other I Contaminant Source Inventory and Synthetic Organic Chemicals (Table Contaminant Source Inventory and Other Organic Chemicals (Table 7)	Risk Ranking for SWSD William Nelson School – Inorganic Chemicals (Table 5) Risk Ranking for SWSD William Nelson School – e 6) Risk Ranking for SWSD William Nelson School –
	C. SWSD William Nelson School Dri and Existing Contaminant Sou	inking Water Protection Area and Potential arces (Map C)
		inant Source Inventory and Risk Ranking for l Public Drinking Water Source (Charts 1 – 14)

Source Water Assessment for SWSD William Nelson School Source of Public Drinking Water, Ekwok, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The SWSD William Nelson School has one Public Water System (PWS) well. The well (PWS No. 260171.001) has been used as a drinking water source since it was drilled in 1974.

The well is a Class A (community and non-transient non-community) water system located between D Street and E Street in Ekwok, Alaska. Available records indicate that there is secondary storage of drinking water with a combined capacity of 600-gallons. The source water is pumped directly from the wellhead by a 20 gallon per minute pump through an ozone and chlorine filter system. This system operates seasonally and serves approximately 45 non-residents through one service connection. The wellhead received a susceptibility rating of **Low** and the aquifer received a susceptibility rating of **Medium**. Combining these two ratings produce a **Low** rating for the natural susceptibility of the well.

Identified potential and current sources of contaminants for the public drinking water source include: domestic wastewater collection systems, large capacity septic systems, nonresidential pit toilets, residential septic systems, aboveground fuel tanks, wastewater holding tanks, petroleum product bulk station/terminals, an airport, roads, electric power generation, a medical/veterinary facility, a landfill, and cemeteries. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals contaminant categories.

Overall, the water well received a vulnerability rating of **High** for the bacteria and viruses, nitrates and nitrites, volatile organic chemicals, synthetic organic chemicals, and other organic chemicals contaminant categories, and a vulnerability rating of **Medium** for heavy metals, cyanide and other inorganic chemicals.

PUBLIC DRINKING WATER SYSTEM

The SWSD William Nelson School well is a Class A (community/non-transient/non-community) public water system. The system is located between D Street and E Street in Ekwok, Alaska (Sec. 35, T9S, R49W, Seward Meridian; see Map A of Appendix A). Ekwok is located along the Nushagak River. The community is located about 43 miles northeast of Dillingham and 285 miles southwest of Anchorage. The community has a population of 128 (ADCED, 2003). Average annual precipitation in Ekwok is between 20 and 35 inches. Temperatures range from 30 to 66°F in summer and 4 to 30°F in winter.

The community of Ekwok obtains most of their water supply from individual wells. Most households are served by the piped sewage collection system and the remaining households have individual septic tanks (ADCED, 2003). Ekwok receives electrical power from Ekwok Electric. Power generating facilities are fueled by diesel. Refuse is collected by individuals and hauled to the landfill (ADCED, 2003).

According to information supplied by ADEC for the SWSD William Nelson School PWS, the depth of the primary water well is approximately 80 feet below the ground surface and is screened in a confined aquifer based on available construction details. The well is not located within a floodplain.

Information acquired from a May 2001 sanitary survey for the public water system indicated that the land surface was sloped away from the well. Generally, land surfaces that slope away from the wellhead promote surface water drainage, which reduces the potential of contaminant migration down the well casing annulus. The sanitary survey indicates that the well is not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing annulus and into source waters.

The entire Bristol Bay area was formerly covered by glaciers and the topography is representative of a postglacial area. Soils information is limited.

Generally, the soils consist of silty sand overlying

relatively clean sand. The silty soils are slightly frost-susceptible. Isolated pockets of permafrost are scattered throughout the area (DOWL, 1982).

DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts. An analytical calculation was used to determine the size and shape of the DWPA for the SWSD William Nelson School PWS. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (Freeze and Cherry, 1979). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class A Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time -of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¹ / ₄ the distance for the 2-yr. time -of-travel
В	Less than the 2 year time-of-travel
C	Less Than the 5 year time -of-travel
D	Less than the 10 year time -of-travel

The DWPA for the SWSD William Nelson School PWS was determined using an analytical calculation

and includes Zones A, B, C, and D (See Map A of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the SWSD William Nelson School DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class A public water system assessments, six categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses.
- Nitrates and/or nitrites,
- Volatile organic chemicals,
- Heavy metals, cyanide and other inorganic chemicals,
- Synthetic organic chemicals,
- Other organic chemicals.

The sources are displayed on Map C of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low.
- Medium.
- High, and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer

Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals.

VULNERABILITY OF THE DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility, and
- Contaminant risks.

Appendix D contains fourteen charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 14 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites, volatile organic chemicals, heavy metals, cyanide and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings						
40 to 50 pts	Very High					
30 to < 40 pts	High					
20 to < 30 pts	Medium					
< 20 pts	Low					

The SWSD William Nelson School's water well is in a confined aquifer. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the susceptibility scores and ratings for this PWS.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the Wellhead	5	Low
Susceptibility of the Aquifer	13	Medium
Natural Susceptibility	18	Low

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings							
40 to 50 pts	Very High						
30 to < 40 pts	High						
20 to < 30 pts	Medium						
< 20 pts	Low						

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	50	Very High
Nitrates and/or Nitrites	50	Very High

Volatile Organic Chemicals	50	Very High
Heavy Metals, Cyanide and		
Other Inorganic Chemicals	34	High
Synthetic Organic Chemicals	47	Very High
Other Organic Chemicals	50	Very High

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Natural Susceptibility (0 – 50 points)

+

Contaminant Risks (0 – 50 points)

=

Vulnerability of the Drinking Water Source to Contamination (0 – 100).

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings							
80 to 100 pts	Very High						
60 to < 80 pts	High						
40 to < 60 pts	Medium						
< 40 pts	Low						

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the six categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	70	High
Nitrates and Nitrites	70	High
Volatile Organic Chemicals	70	High
Heavy Metals, Cyanide and		
Other Inorganic Chemicals	55	Medium
Synthetic Organic Chemicals	65	High
Other Organic Chemicals	70	High

Bacteria and Viruses

The contaminant risk for bacteria and viruses is **Very High**. The risk is primarily attributed to the presence of a large capacity septic system and a landfill in Zones A and B (see Table 2 – Appendix B).

No positive bacteria counts have been reported in recent (within five years) sampling events (See Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D). Only a small amount of bacteria and viruses are required to endanger public health.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is **Very High**. The risk to this source of public drinking water is primarily attributed to the presence of a large capacity septic system and a landfill in Zones A and B (see Table 3 – Appendix B).

Nitrates are very mobile, moving at approximately the same rate as water. The sampling history for this well indicates that low levels of nitrates have been detected in recent sampling events. However, the reported concentrations of nitrates do not exceed the maximum contaminant level (MCL) of 10 mg/L. Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L; therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D).

Nitrate levels are often derived from the decomposition of organic matter in soils. Although the nitrate source is unknown, such occurrences may be attributed to septic systems or other sources. After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination is **High**.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is **Very High**. The risk is primarily attributed to the presence of a petroleum product bulk station/terminal, an airport, and a landfill located in Zones A and B. Numerous other potential contaminant sources are also found within the protection area (see Table 4 – Appendix B).

All recent sampling data for VOCs were below detection levels (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of

the well, the overall vulnerability of the well to contamination is **High**.

Heavy Metals, Cyanide and Other Inorganic Chemicals

The contaminant risk for heavy metals, cyanide and other inorganic chemicals is **High**. The risk is primarily attributed to the presence of a landfill located in Zone B. Numerous other potential contaminant sources are also found within the protection area (see Table 5 – Appendix B).

Based on review of recent sampling records for this public water system, copper and lead have been detected in recent sampling history. Lead exceeded the MCL of 0.015 mg/L (see Chart 8 – Contaminant Risks for Heavy Metals, Cyanide, and Other Inorganic Chemicals in Appendix D).

The reported concentrations of lead in recent sampling events are likely representative of source water conditions. Risk points were assigned based on the exceedence of the lead MCL.

After combining the contaminant risk for heavy metals, cyanide and other inorganic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Medium**.

Synthetic Organic Chemicals

The contaminant risk for synthetic organic chemicals is **Very High**. The risk is primarily attributed to the presence of a landfill located in Zone B. Numerous other potential contaminant sources are also found within the protection area (see Table 6 – Appendix B).

No recent sampling data was available in ADEC records for SWSD William Nelson School (See Chart 11 – Contaminant Risks for Synthetic Organic Chemicals in Appendix D).

After combining the contaminant risk for synthetic organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Other Organic Chemicals

The contaminant risk for other organic chemicals is **Very High**. The risk is primarily attributed to the presence of a petroleum product bulk station/terminal, electric power generation, and a landfill located in Zones A and B. Numerous other potential contaminant sources are also found within the protection area (see Table 7 – Appendix B).

No recent sampling data was available in ADEC records for SWSD William Nelson School (See Chart 13 – Contaminant Risks for Other Organic Chemicals in Appendix D).

After combining the contaminant risk for other organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the SWSD William Nelson School and the community of Ekwok to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of the drinking water source.

REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2003 [WWW document]. URL: http://www.dced.state.ak.us/cbd/commdb/CF_COMDB.htm
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL http://www.state.ak.us/dec/dspar/csites/cs search.htm
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL http://www.dec.state.ak.us/spar/stp/ust/search/fac_search.asp
- DOWL Engineers (DOWL), 1982, Upper Bristol Bay Region Community Planning Profiles.
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Drinking Water Protection Area Location Map (Map A)

Public Water Well System for PWS #260171.001 SWSD William Nelson School Ekwok **LEGEND** Public Water System Well Hydrography/Physical Lake or Pond ×324 Contours Transportation ---- Primary Route (Class 1) Secondary Route (Class 2) Road (Class 3) Road (Class 4) Road (Class 5, Four-wheel drive) **Groundwater Protection Zones** Zone A Protection Area— Several Months Travel Time Zone B Protection Area— 2 Years Travel Time Zone C Protection Area – 5 Years Travel Time Zone D Protection Area- 10 Years Travel Time Data Sources: Contaminant Sources, Public Water System Wells, Contours Alaska Department of Environmental Conservation (ADEC) Critical Facilities, Federal Emergency Management Agency (FEMA) All other data: United States Geological Survey (USGS) Drinking Water Protection Areas based on "Alaska Drinking Water Protection Program - Guidance Manual for Class B Public Water Systems" published by ADEC Landing Strip URS Corporation does not guarantee the accuracy or validity of the data provided. SWSD William Nelson School Ekwok PWS 260171.001 Aleknagik Igiugio Area of Map 1 Lævlelock Portage C SWSD William Nelson School Ekwok PWS 260171.001 Appendix A Map A

APPENDIX B

Contaminant Source Inventory and Risk Ranking (Tables 1-7)

Contaminant Source Inventory for SWSD WM Nelson School

PWSID 260171.001

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Domestic wastewater collection systems (sewer lines or lift stations)	D01	D01-01	A	С	Assume piped city sewage located in Zone A
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	C	Assume community large capacity septic system located in Zone A
Pit toilets (open hole), nonresidential (one or more)	D16	D16-01	A	С	Assume 1 or less community outhouse in Zone A
Septic systems (serves one single-family home)	R02	R02-01	A	С	Assume 15 or less residential septic systems in Zone A
Tanks, heating oil, residential (above ground)	R08	R08-01	A	С	Assume 35 or less residential heating oil tanks in Zone A
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	С	City generator
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	С	Clinic
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	С	William Nelson School
Wastewater Holding Tank	T22	T22-01	A	С	Assume 15 or less wastewater holding tanks located in Zone A
Petroleum product bulk station/terminals	X11	X11-01	A	C	Power plant fuel storage
Airports	X14	X14-01	A	С	
Highways and roads, dirt/gravel	X24	X24-01	A	С	Assume 1-20 roads located in Zone A
Electric power generation (fossil fuels)	X36	X36-01	A	С	City generator
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	С	Clinic
Landfills (municipal; Class III)	D51	D51-01	В	C	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	В	С	Post Office
Cemeteries	X01	X01-01	В	С	
Airports	X14	X14-02	В	С	
Highways and roads, dirt/gravel	X24	X24-02	В	С	Assume 1-20 roads located in Zone B

Contaminant Source Inventory and Risk Ranking for SWSD WM Nelson School Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Medium	С	Assume piped city sewage located in Zone A
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	High	С	Assume community large capacity septic system located in Zone A
Pit toilets (open hole), nonresidential (one or more	D16	D16-01	A	Medium	С	Assume 1 or less community outhouse in Zone A
Septic systems (serves one single-family home)	R02	R02-01	A	Low	С	Assume 15 or less residential septic systems in Zone A
Wastewater Holding Tank	T22	T22-01	A	Low	С	Assume 15 or less wastewater holding tanks located in Zone A
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assume 1-20 roads located in Zone A
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Medium	С	Clinic
Landfills (municipal; Class III)	D51	D51-01	В	High	С	·
Highways and roads, dirt/gravel	X24	X24-02	В	Low	С	Assume 1-20 roads located in Zone B

Contaminant Source Inventory and Risk Ranking for SWSD WM Nelson School Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Medium	С	Assume piped city sewage located in Zone A
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	High	С	Assume community large capacity septic system located in Zone A
Pit toilets (open hole), nonresidential (one or more	D16	D16-01	A	Medium	С	Assume 1 or less community outhouse in Zone A
Septic systems (serves one single-family home)	R02	R02-01	A	Low	С	Assume 15 or less residential septic systems in Zone A
Wastewater Holding Tank	T22	T22-01	A	Low	С	Assume 15 or less wastewater holding tanks located in Zone A
Airports	X14	X14-01	A	Low	С	
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assume 1-20 roads located in Zone A
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Low	С	Clinic
Landfills (municipal; Class III)	D51	D51-01	В	Very High	C	
Cemeteries	X01	X01-01	В	Medium	С	
Airports	X14	X14-02	В	Low	С	
Highways and roads, dirt/gravel	X24	X24-02	В	Low	С	Assume 1-20 roads located in Zone B

Contaminant Source Inventory and Risk Ranking for SWSD WM Nelson School Sources of Volatile Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Low	С	Assume piped city sewage located in Zone A	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	Low	С	Assume community large capacity septic system located in Zone A	
Pit toilets (open hole), nonresidential (one or more	D16	D16-01	A	Low	С	Assume 1 or less community outhouse in Zone A	
Septic systems (serves one single-family home)	R02	R02-01	A	Low	С	Assume 15 or less residential septic systems in Zone A	
Tanks, heating oil, residential (above ground)	R08	R08-01	A	Medium	С	Assume 35 or less residential heating oil tanks in Zone A	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	Low	С	City generator	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	Low	С	Clinic	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	Low	С	William Nelson School	
Wastewater Holding Tank	T22	T22-01	A	Medium	С	Assume 15 or less wastewater holding tanks located in Zone A	
Petroleum product bulk station/terminals	X11	X11-01	A	Very High	С	Power plant fuel storage	
Airports	X14	X14-01	A	High	С		
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assume 1-20 roads located in Zone A	
Electric power generation (fossil fuels)	X36	X36-01	A	Medium	С	City generator	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Low	С	Clinic	
Landfills (municipal; Class III)	D51	D51-01	В	High	C		
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	В	Low	С	Post Office	
Airports	X14	X14-02	В	High	С		
Highways and roads, dirt/gravel	X24	X24-02	В	Low	С	Assume 1-20 roads located in Zone B	

Contaminant Source Inventory and Risk Ranking for SWSD WM Nelson School

Sources of Heavy Metals, Cyanide and Other Inorganic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Low	С	Assume piped city sewage located in Zone A	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	Low	С	Assume community large capacity septic system located in Zone A	
Pit toilets (open hole), nonresidential (one or more	D16	D16-01	A	Low	C	Assume 1 or less community outhouse in Zone A	
Septic systems (serves one single-family home)	R02	R02-01	A	Low	C	Assume 15 or less residential septic systems in Zone A	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-01	A	Low	C	City generator	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-02	A	Low	С	Clinic	
Tanks, heating oil, nonresidential (aboveground)	T14	T14-03	A	Low	С	William Nelson School	
Wastewater Holding Tank	T22	T22-01	A	Medium	С	Assume 15 or less wastewater holding tanks located in Zone A	
Petroleum product bulk station/terminals	X11	X11-01	A	Low	С	Power plant fuel storage	
Airports	X14	X14-01	A	Low	С		
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assume 1-20 roads located in Zone A	
Electric power generation (fossil fuels)	X36	X36-01	A	Medium	С	City generator	
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Low	С	Clinic	
Landfills (municipal; Class III)	D51	D51-01	В	High	C		
Tanks, heating oil, nonresidential (aboveground)	T14	T14-04	В	Low	С	Post Office	
Cemeteries	X01	X01-01	В	Low	С		
Airports	X14	X14-02	В	Low	С		
Highways and roads, dirt/gravel	X24	X24-02	В	Low	С	Assume 1-20 roads located in Zone B	

Contaminant Source Inventory and Risk Ranking for SWSD WM Nelson School Sources of Synthetic Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Low	С	Assume piped city sewage located in Zone A	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	Low	С	Assume community large capacity septic system located in Zone A	
Septic systems (serves one single-family home)	R02	R02-01	A	Low	С	Assume 15 or less residential septic systems in Zone A	
Petroleum product bulk station/terminals	X11	X11-01	A	Low	С	Power plant fuel storage	
Airports	X14	X14-01	A	Medium	С		
Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes)	X40	X40-01	A	Low	С	Clinic	
Landfills (municipal; Class III)	D51	D51-01	В	Very High	С		
Cemeteries	X01	X01-01	В	Medium	С		
Airports	X14	X14-02	В	Medium	С		


Contaminant Source Inventory and Risk Ranking for SWSD WM Nelson School Sources of Other Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments	
Domestic wastewater collection systems (sewer line or lift stations)	D01	D01-01	A	Low	С	Assume piped city sewage located in Zone A	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	Low	С	Assume community large capacity septic system located in Zone A	
Septic systems (serves one single-family home)	R02	R02-01	A	Low	C	Assume 15 or less residential septic systems in Zone A	
Wastewater Holding Tank	T22	T22-01	A	Medium	С	Assume 15 or less wastewater holding tanks located in Zone A	
Petroleum product bulk station/terminals	X11	X11-01	A	High	С	Power plant fuel storage	
Airports	X14	X14-01	A	Medium	С		
Highways and roads, dirt/gravel	X24	X24-01	A	Low	С	Assume 1-20 roads located in Zone A	
Electric power generation (fossil fuels)	X36	X36-01	A	High	С	City generator	
Landfills (municipal; Class III)	D51	D51-01	В	Very High	С		
Airports	X14	X14-02	В	Medium	С		
Highways and roads, dirt/gravel	X24	X24-02	В	Low	С	Assume 1-20 roads located in Zone B	

APPENDIX C

Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

Public Water Well System for PWS #260171.001 SWSD William Nelson School Ekwok Showing Potential and Existing Sources of Contamination

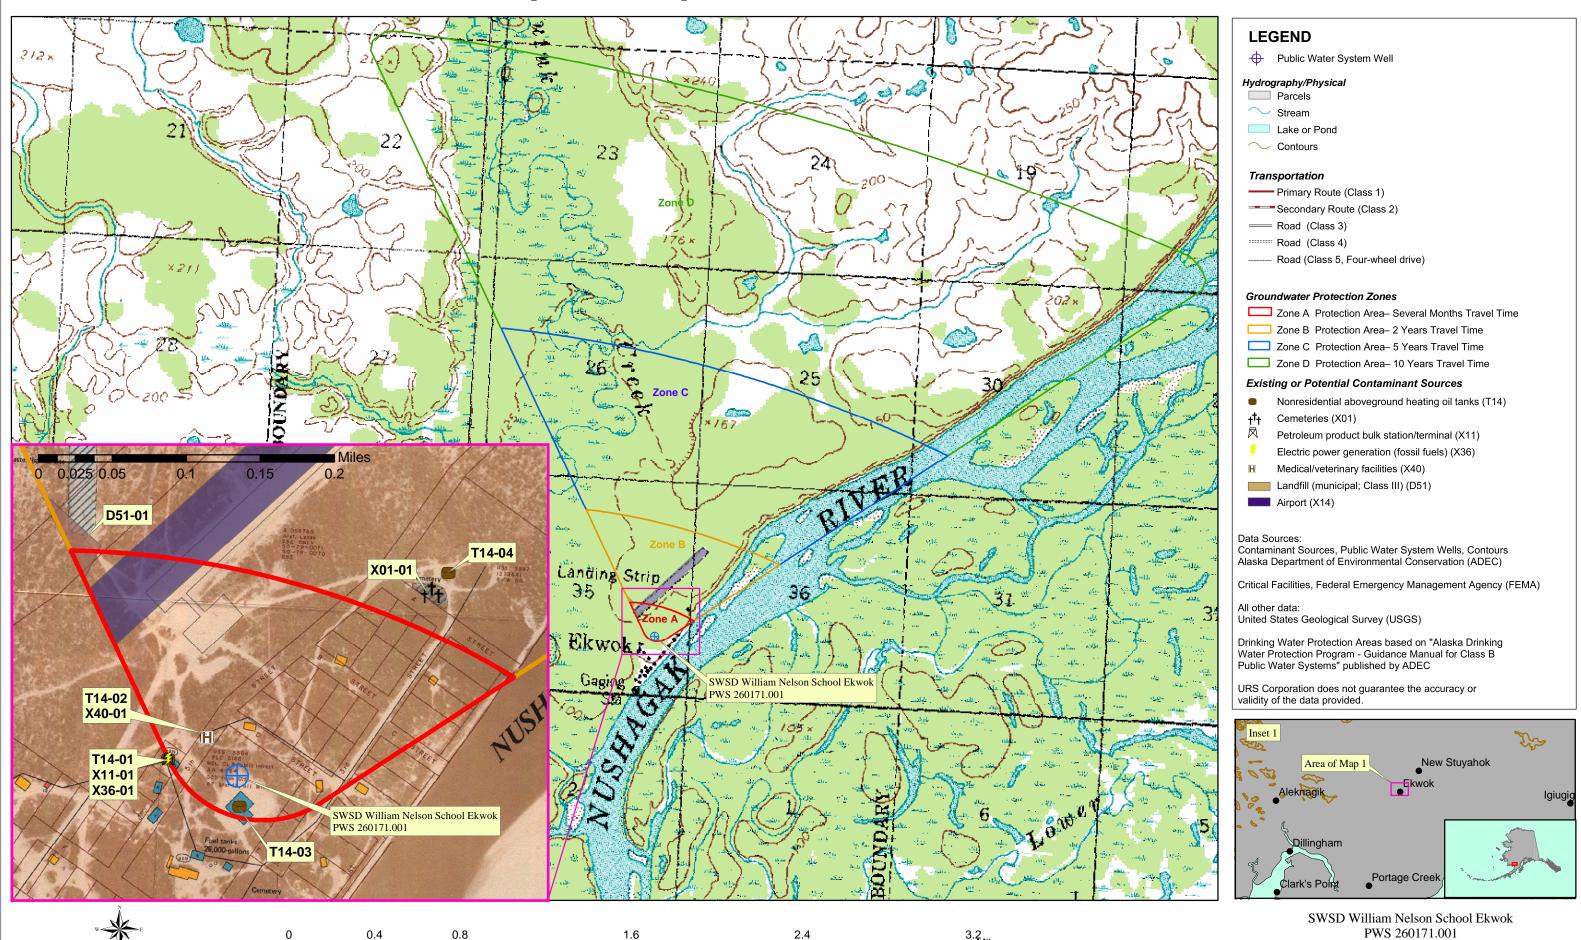

Appendix C Map C

APPENDIX D

Vulnerability Analysis for Public Drinking Water Source (Charts 1-14)

Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 pts NO Is the well Increase susceptibility 5 pts + 5 pts properly grouted? Is the well Increase susceptibility 20 pts 0 pts capped? YES YES Susceptibility of wellhead Low 5 pts Increase susceptibility: YES Is the well 10 pts: suspected floodplain + 0 pts within a Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts 10 to < 15 pts medium NO < 10 pts low Is the land surface sloped Increase susceptibility 5 pts 0 pts away from the

Chart 1. Susceptibility of the wellhead - SWSD William Nelson School Ekwok (PWS No. 260171.001)

Chart 2. Susceptibility of the aquifer SWSD William Nelson School Ekwok (PWS No. 260171.001)

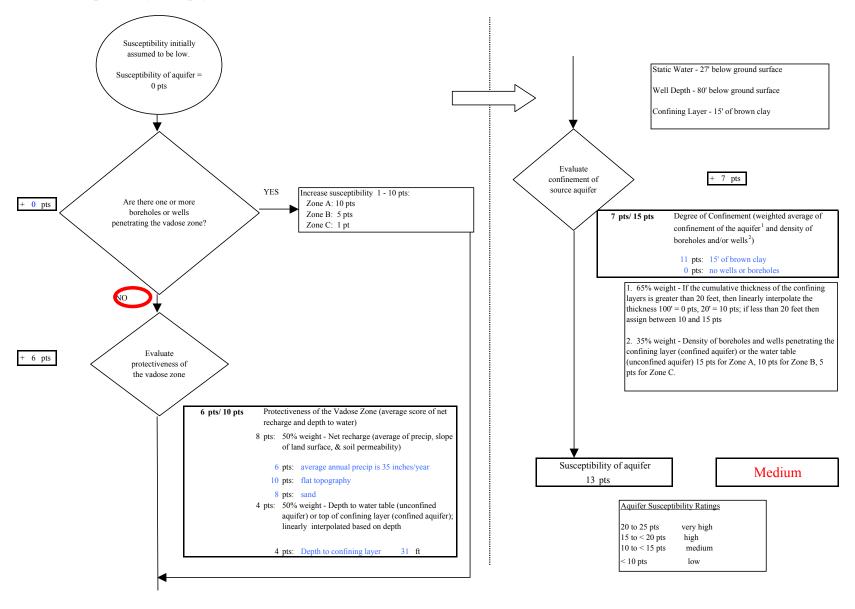


Chart 3. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Bacteria & Viruses

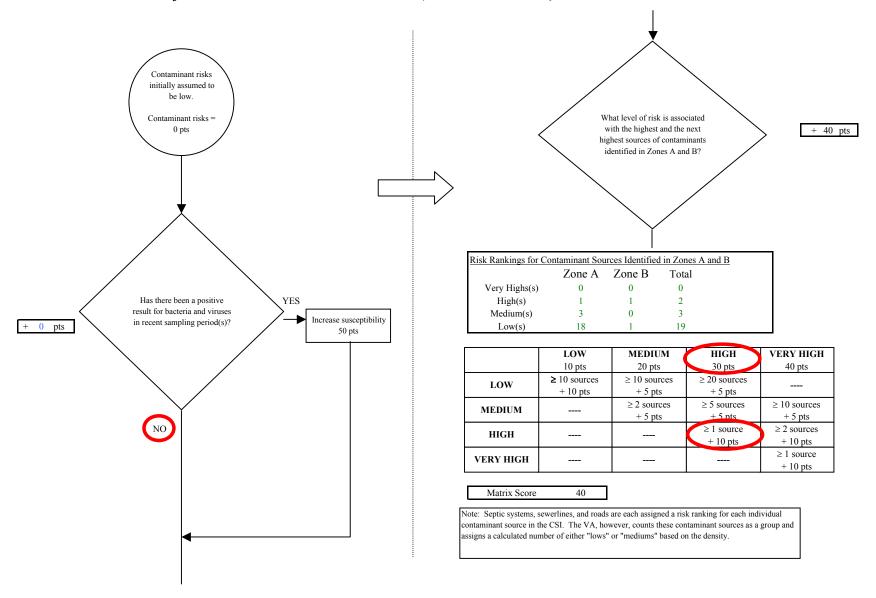


Chart 3. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Bacteria & Viruses NO Are there sufficient Initial assessment of risk posed by Risk unchanged controls, conditions, or potential sources of contamination monitoring to warrant = 40 pts downgrading risk? Are any YES significant Risk unchanged contaminant Reduce risk 1 - 10 pts sources within - 0 pts Zone A? The number and magnitude of Risk posed by potential sources of contaminant sources in YES contamination with controls Zone A determines a risk increase. See Table 2 for 50 + 10 pts Increase risk 1 - 10 pts inventory. Existing Risk due to existing 0 pts contamination Are there any conditions that Risk unchanged Risk posed by potential sources warrant upgrading Potential of contamination with controls risk? 50 pts Contaminant risks Contaminant Risk YES 50 pts Increase risk 1 - 10 pts + 0 pts Contaminant risks* * Truncate risk at 50 pts 50 Contaminant Risk Ratings Risk posed by potential sources of contamination 40 to 50 pts very high 50 30 to < 40 pts high Very High $20 \text{ to} \le 30 \text{ pts}$

Page 4 of 25

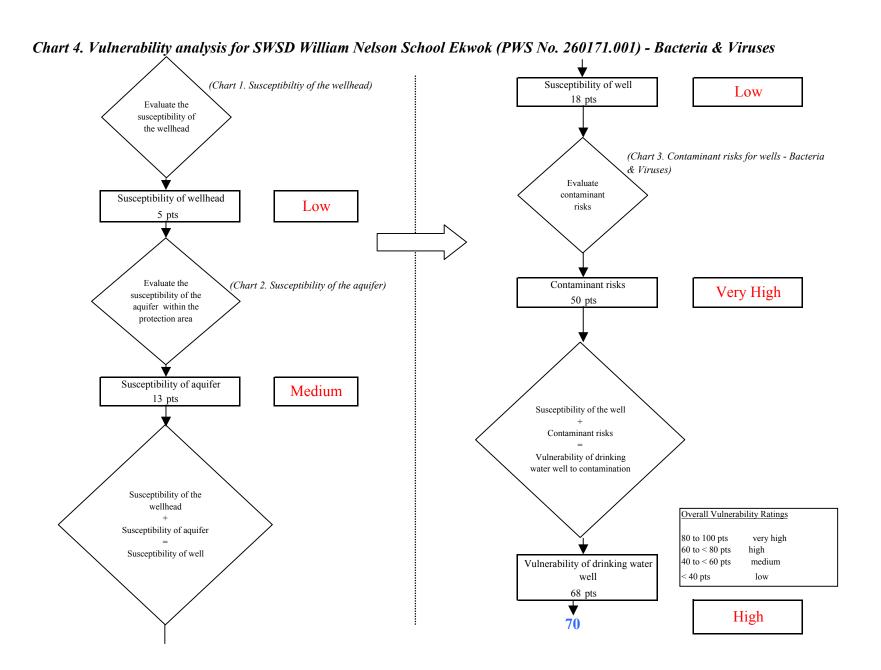


Chart 5. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Evaluate the level of Current level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources 0 pts Is the concentration of Has nitrates and/or NO the contaminant nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 6/13/2001 0.22 0.2 12/31/2000 The nitrate concentration is 12/21/1998 0.31 assumed to be natural if less than 2 mg/L (20%), or Increasing: risk up 1 - 10 pts YES attributed to man made Decreasing: risk down 1 - 5 pts sources if greater than 2 + 0 pts Same: risk unchanged mg/L. Maximum Contaminant Level (MCL) = 10 mg/LDetected Nitrate Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect sources made sources [MCL = 50 pts; detect = 0 pts]2 pts 0 pts Risk due to existing contamination 2 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources


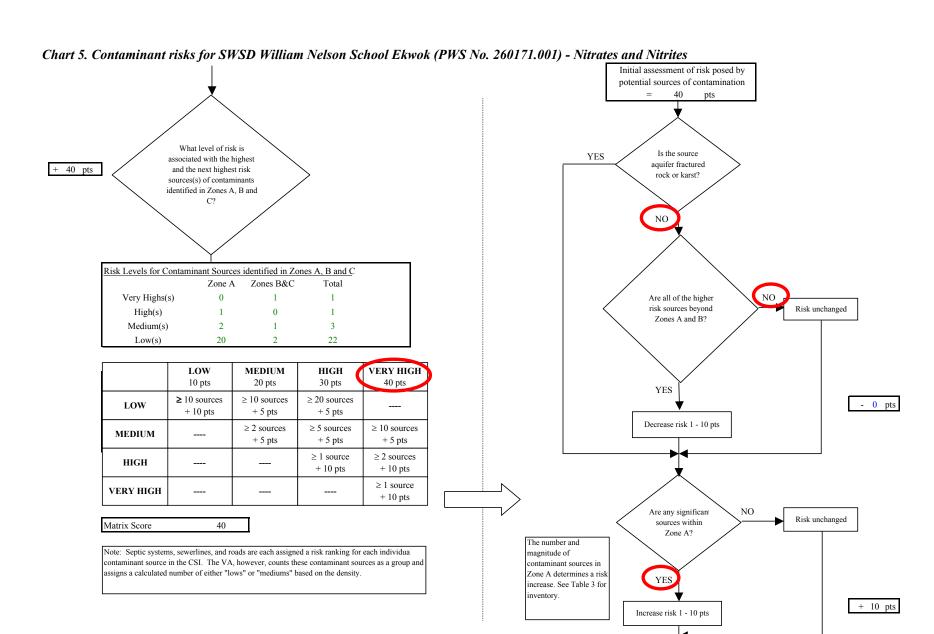


Chart 5. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Nitrates and Nitrites Existing NO Are there conditions 2 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 50 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES 52 pts increase. See Table 3 for Contaminant risks inventory. 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 50 pts *Truncate risk at 50 pts Contaminant risks* 50 Contaminant Risk Ratings Are there sufficient Very High controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls


Page 8 of 25

(Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Low 18 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate Susceptibility of wellhead contaminant risks Low 5 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Medium 13 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 68 pts High **70**

Chart 6. Vulnerability analysis for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Nitrates and Nitrites

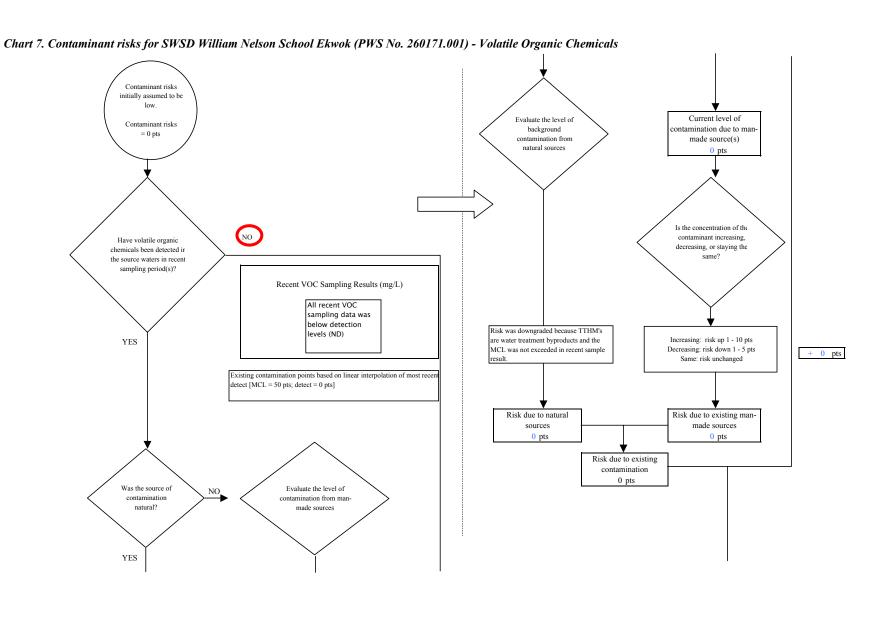

Page 10 of 25

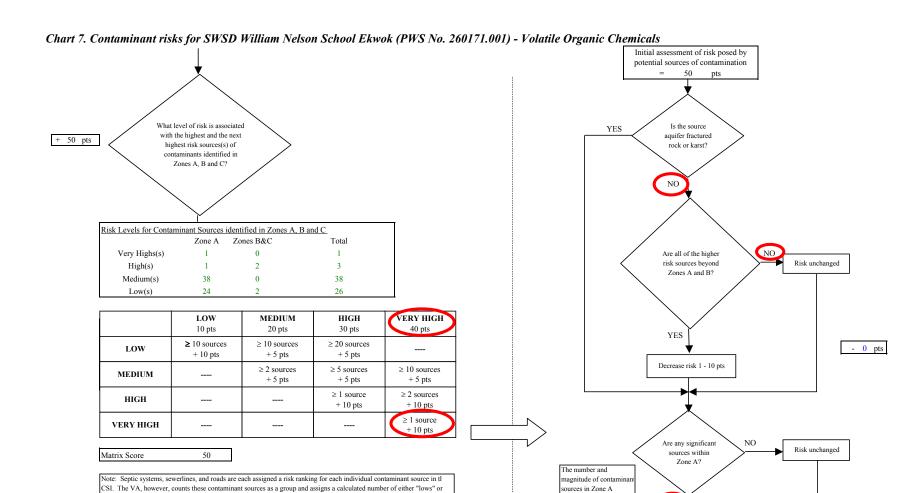

Page 11 of 25

determines a risk


increase. See Table 4 for inventory.

YES

Increase risk 1 - 10 pts

+ 10 pts

"mediums" based on the density.

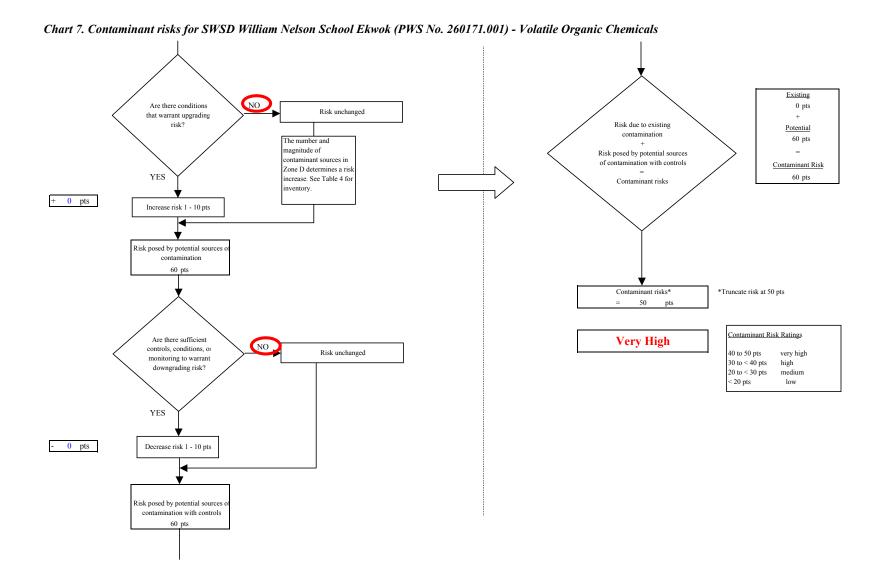


Page 12 of 25

Chart 8. Vulnerability analysis for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Volatile Organic Chemicals (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Low 18 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate Susceptibility of wellhead contaminant risks Low 5 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Medium 13 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 68 pts High **70**

Chart 9. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Heavy Metals, Cyanide and Other Inorganic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks contamination due to manbackground = 0 ptscontamination from made source(s) natural sources 50 pts The reported NO or Is the concentration of concentrations of lead Have heavy metals, UNKNOWN the contaminant and copper are likely cyanide or other inorganic increasing, decreasing, attributed to the water chemicals been detected or staying the same? treatment/conveyance in the source waters in system. No risk points recent sampling period(s)? assigned since neither Recent Metals Sampling Results (mg/L analyte exceeded 100% of 12/31/2000 0.404 the MCL in most recent sampling event. 1.093 6/30/2000 12/31/1999 1.2 12/31/2000 0.003 Lead YES 6/30/2000 0.071 Increasing: risk up 1 - 10 pts Decreasing: risk down 1 - 5 pts 12/31/1999 + -50 pts 0.03 Same: risk unchanged Maximum Contaminant Although other inorganic compounds have Level (MCL) (mg/L) % of MCI been detected in previous sampling events, Copper= 1.3 92% lead has reported the highest percent MCL values in the past 5 years. 0.015 473% Lead = Risk due to existing man-Risk due to natural Existing contamination points based on linear sources made sources interpolation of most recent detect [MCL = 50 pts; 0 pts 0 pts detect = 0 ptsRisk due to existing contamination 0 pts Evaluate the level Was the source of NO. of contamination contamination from man-made natural? sources YES

Page 14 of 25

Chart 9. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Heavy Metals, Cyanide and Other Inorganic Chemicals

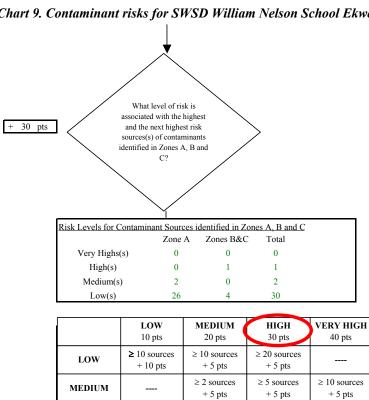

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts				
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts					
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts				
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts				
VERY HIGH				≥ 1 source + 10 pts				

Matrix Score 30

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.


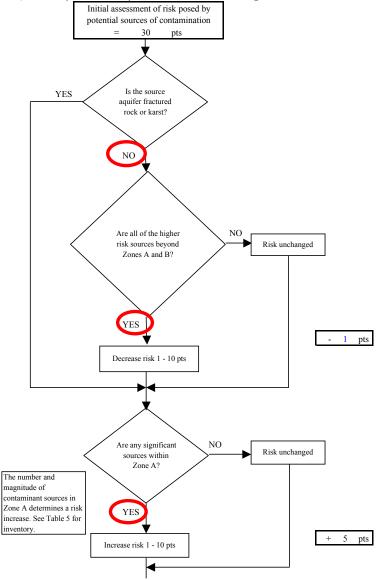


Chart 9. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Heavy Metals, Cyanide and Other Inorganic Chemicals Existing Are there conditions 0 pts Risk unchanged upgrading risk? Risk due to existing Potential contamination 34 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a YES 34 pts risk increase. See Table Contaminant risks 5 for inventory. 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 34 pts Contaminant risks* *Truncate risk at 50 pts 34 Contaminant Risk Ratings Are there sufficient High NQ controls, conditions, Risk unchanged 40 to 50 pts very high or monitoring to 30 to < 40 pts warrant downgrading high risk? 20 to < 30 pts medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls 34 pts

Chart 10. Vulnerability analysis for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Heavy Metals, Cyanide and Other Inorganic Chemicals (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Low 18 pts Evaluate the susceptibility of the wellhead (Chart 9. Contaminant risks for wells - Heavy Metals, Cyanide and Other Inorganic Evaluate Chemicals) contaminant Susceptibility of wellhead Low 5 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks High susceptibility of the 34 pts aquifer within the protection area Susceptibility of aquifer Medium 13 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well 40 to < 60 pts Vulnerability of drinking water medium well 40 pts low 52 pts Medium **55**

Page 17 of 25

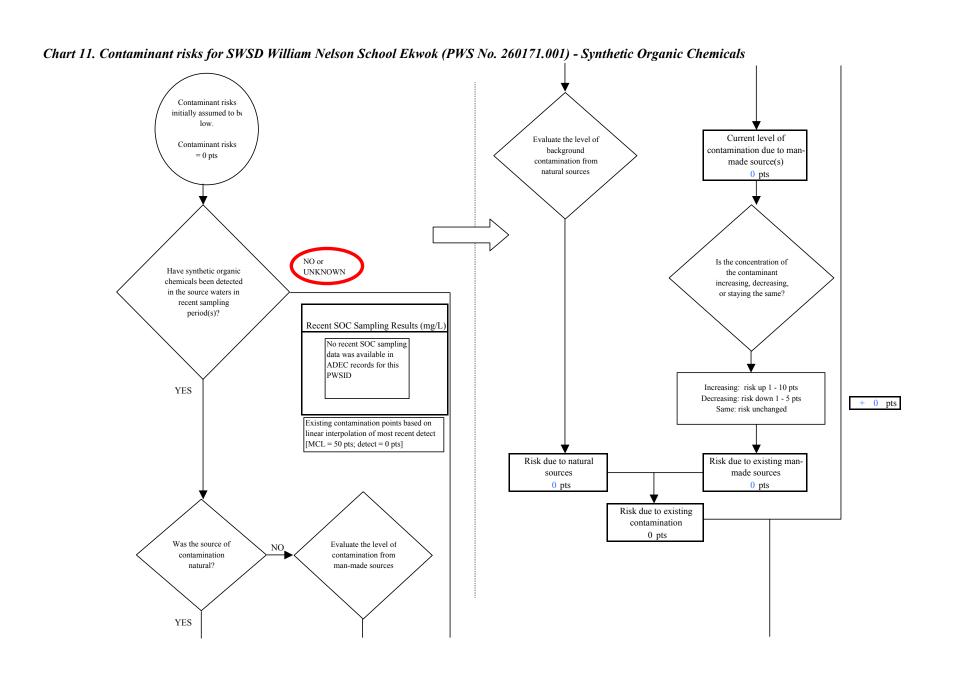

Page 18 of 25

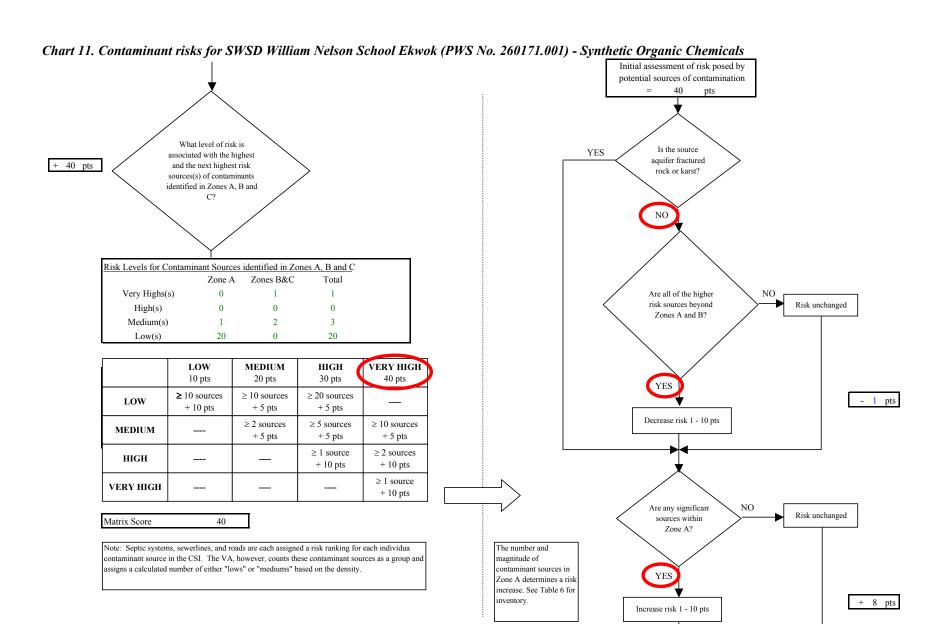


Chart 11. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Synthetic Organic Chemicals Existing NO Are there conditions 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 47 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES 47 pts increase. See Table 6 for Contaminant risks inventory. 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 47 pts *Truncate risk at 50 pts Contaminant risks* 47 Contaminant Risk Ratings Are there sufficient Very High controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls

Page 20 of 25

Chart 12. Vulnerability analysis for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Synthetic Organic Chemicals Susceptibility of well (Chart 1. Susceptibiltiy of the wellhead) Low 18 pts Evaluate the susceptibility of the wellhead (Chart 11. Contaminant risks for wells -Evaluate Synthetic Organic Chemicals) contaminant Susceptibility of wellhead Low risks 5 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 47 pts aquifer within the protection area Susceptibility of aquifer Medium 13 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well 40 to < 60 pts Vulnerability of drinking water medium < 40 pts low well 65 pts High **65**

Page 21 of 25

Chart 13. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Other Organic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources NO or Is the concentration of Have other organic UNKNOWN the contaminant chemicals been detected increasing, decreasing, in the source waters in or staying the same? recent sampling period(s)? Recent OOC Sampling Results (mg/L) No recent OOC sampling data was available in ADEC records for this PWSID Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Existing contamination points based on linear interpolation of most recent detect [MCL = 50 pts; detect = 0 pts]Risk due to natural Risk due to existing mansources made sources 0 pts 0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources YES

Page 22 of 25

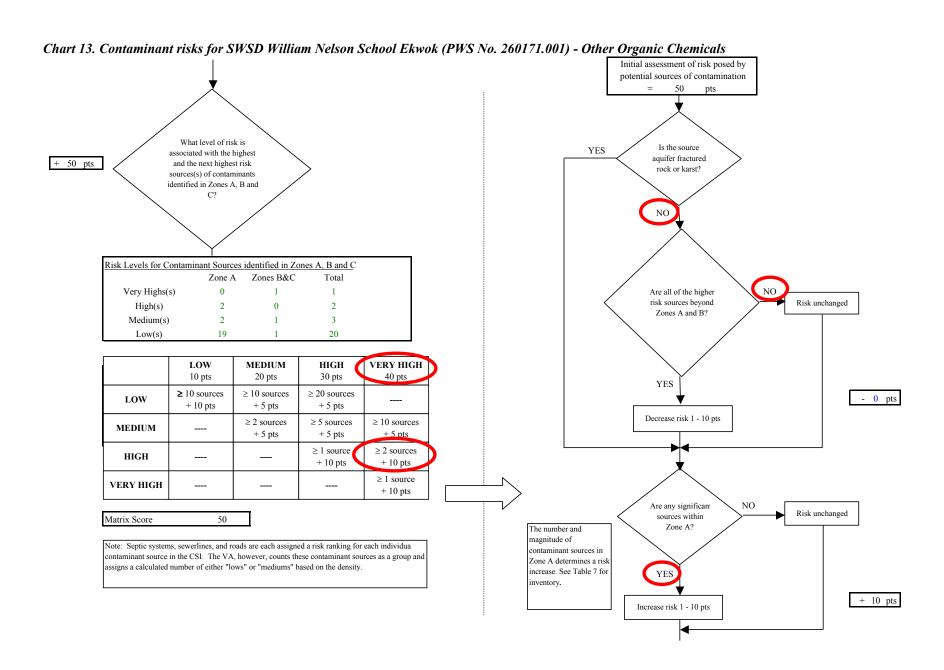


Chart 13. Contaminant risks for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Other Organic Chemicals Existing Are there conditions 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 60 pts The number and magnitude of Risk posed by potential sources contaminant sources in of contamination with controls Contaminant Risk Zone D determines a risk YES 60 pts increase. See Table 7 for Contaminant risks inventory. 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 60 pts *Truncate risk at 50 pts Contaminant risks* 50 Contaminant Risk Ratings Are there sufficient Very High controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls

Chart 14. Vulnerability analysis for SWSD William Nelson School Ekwok (PWS No. 260171.001) - Other Organic Chemicals Susceptibility of well (Chart 1. Susceptibiltiy of the wellhead) Low 18 pts Evaluate the susceptibility of the wellhead (Chart 13. Contaminant risks for wells - Other Evaluate Organic Chemicals) contaminant Susceptibility of wellhead Low risks 5 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Medium 13 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well 40 to < 60 pts Vulnerability of drinking water medium < 40 pts low 68 pts High **70**

Page 25 of 25