

Source Water Assessment

A Hydrogeologic Susceptibility and
Vulnerability Assessment for

Totem Inn

Drinking Water System,

Healy, Alaska

PWSID # 390439

Source Water Assessment for Totem Inn Drinking Water System, Healy, Alaska PWSID # 390439

By Ecology & Environment, Inc.

DRINKING WATER PROTECTION PROGRAM REPORT # 284

August 2002

The Drinking Water Protection Program is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

| | Page | | Page |
|---------------------------------------|------|-------------------------------------|------|
| Executive Summary | 1 | Inventory of Potential and Existing | |
| Introduction | 1 | Contaminant Sources | 2 |
| Description of the Healy area, Alaska | 1 | Ranking of Contaminant Risks | 3 |
| Totem Inn | | Vulnerability of Totem Inn | |
| Public Drinking Water System | 2 | Drinking Water Source | 3 |
| Totem Inn | | Summary | 4 |
| Drinking Water Protection Area | 2 | References Cited | 5 |

TABLES

| | | |
|-------|---|---|
| TABLE | 1. Definition of Zones | 2 |
| | 2. Natural Susceptibility - Susceptibility of the Wellhead and Aquifer to Contamination | 3 |
| | 3. Contaminant Risks | 4 |
| | 4. Overall Vulnerability of Totem Inn to Contamination | 4 |

FIGURES

| | | |
|--------|---|---|
| FIGURE | 1. Index map showing the location of the Healy area | 1 |
|--------|---|---|

APPENDICES

| | | |
|----------|--|--|
| APPENDIX | A. Totem Inn Drinking Water Protection Area (Map 1) | |
| | B. Contaminant Source Inventory for Totem Inn (Table 1) Contaminant Source Inventory and Risk Ranking for Totem Inn– Bacteria and Viruses (Table 2) Contaminant Source Inventory and Risk Ranking for Totem Inn– Nitrates/Nitrites (Table 3) Contaminant Source Inventory and Risk Ranking for Totem Inn– Volatile Organic Chemicals (Table 4) | |
| | C. Totem Inn Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map 2) | |
| | D. Vulnerability Analysis for Contaminant Source Inventory and Risk Ranking for Totem Inn Public Drinking Water Source (Charts 1 – 8) | |

Source Water Assessment for Totem Inn Source of Public Drinking Water, Healy, Alaska

By Ecology & Environment, Inc.

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

Totem Inn is a Class B (transient/non-community) water system consisting of one primary and one secondary well in Healy, Alaska. Identified potential and current sources of contaminants for Totem Inn public drinking water source include: paved and gravel roads and a septic system. These identified potential and existing sources of contamination are considered sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water sources for Totem Inn received a vulnerability rating of **Low** for bacteria and viruses, **Low** for nitrates and nitrites, and **Low** for volatile organic chemicals.

INTRODUCTION

The Alaska Department of Environmental Conservation (ADEC) is completing source water assessments for all public drinking water sources in the State of Alaska. The purpose of this assessment is to provide owners and/or operators, communities, and local governments with information they can use to preserve the quality of Alaska's public drinking water supplies. The results of this source water assessment can be used to decide where voluntary protection efforts are needed and feasible, and also what efforts will be most effective in reducing contaminant risks to your water system. Ecology and Environment, Inc. has been contracted to perform these assessments under the supervision of ADEC.

This source water assessment combines a review of the natural conditions at the site and the potential and existing contaminant risks. These are combined to determine the overall vulnerability of the drinking water source to contamination.

DESCRIPTION OF THE HEALY AREA

Location

The community of Healy (pop. 1,000) is located at approximately 78 miles southwest of Fairbanks, on the George Parks Highway, a few miles north of the entrance to Denali National Park (Figure 1).



Figure 1

Precipitation

The Healy area averages over 15 inches of precipitation per year, with approximately 73 inches of annual snowfall (ACRC 2002).

Topography and Drainage

Healy is located near the confluence of Healy Creek and the Nenana River. The area is dominated by several steep peaks to the south, including Mount Healy, with somewhat gentler terrain to the north. The town itself has relatively flat topography. Drainage is typically towards the Nenana River or one of its tributaries.

Groundwater Use

The majority of residents in Healy have private water wells and septic systems; others haul water from a

community well source. There are no municipal water or sewage facilities (ADCED 2002).

Geology and Soils

The surficial geology of the Healy area consists mainly of glacial outwash gravel of various ages, together with some recent river terrace gravels. Nenana Gravel, a poorly-consolidated conglomerate and coarse sandstone with interbedded mudflow deposits and thin claystone and lignite, is found in the mountainous terrain northeast of Healy (Wahrhaftig 1970).

TOTEM INN PUBLIC DRINKING WATER SYSTEM

Totem Inn is a Class B (transient/non-community) water system. The system consists of one well near the Parks Highway milepost 249.

According to the well log completed for the water system, installation of the primary well well occurred on June 20, 1992 to a total depth of approximately 180 feet below ground surface. The most recent Sanitary Survey (6/11/99) indicates the well does not have an adequate sanitary seal, although it is capped. A properly installed sanitary seal may provide protection against contaminants from entering the source waters at the well casing. The land surface is not appropriately sloped away from the well to provide adequate surface water drainage. The well apparently was not grouted according to ADEC regulations (grouting was not required prior to 1993). Proper grouting provides added protection against contaminants travelling along the well casing and into source waters. The well is assumed to be confined based on the static water level and lithologies encountered during drilling.

There is no well log available for the secondary well; if one could be located, it would improve the accuracy of this report. According to the 1999 Sanitary Survey, the well has a depth of approximately 165 feet. It is capped but has no sanitary seal, is not grouted, and the land surface is sloped away from the well.

This system operates year-round and serves approximately 7 resident and more than 100 non-residents.

TOTEM INN DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. Some areas are more likely to allow contamination to reach the well than others. These

areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the Drinking Water Protection Area (DWPA). Because a release of contaminants within the DWPA are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts.

An analytical calculation was used to determine the size and shape of the DWPA. The input parameters describing the attributes of the aquifer in this calculation were adopted from the U.S. Geological Survey (*Patrick et al. 1989*). Additional methods were also used to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful DWPA (Please refer to the Guidance Manual for Class B Water Systems for additional information).

The DWPAs established for wells by the ADEC are separated into four zones. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well. The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four DWPA zones and the calculated time-of-travel for each:

Table 1. Definition of Zones

| Zone | Definition |
|------|----------------------------------|
| A | ¼ the distance to the 2-year TOT |
| B | Less than the 2-year TOT |
| C | Less than the 5-year TOT |
| D | Less than the 10 year TOT |

As an example, water moving through the aquifer in Zone B will most likely reach the well in less than 2 years from the time it crosses the outer limit of Zone B.

Zone A also incorporates the area downgradient from the well to take into account the area of the aquifer that is influenced by pumping of the well. Water within the aquifer in Zone A will reach the well in several hours to several months.

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Totem Inn DWPA. This

inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites; and
- Volatile organic chemicals.

Inventoried potential sources of contamination within Zones A through Zone D were associated with residential and light industrial type activities. The sources are summarized in the tables in Appendix B of the Guidance Manual.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are sorted and ranked according to what type and level of risk they represent. Ranking of contaminant risks for a “potential” or “existing” source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Further, contaminant risks are a function of the number and density of those types of contaminant sources as well as the proximity of those sources to the well.

VULNERABILITY OF TOTEM INN DRINKING WATER SOURCE

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Each of the three categories of drinking water contaminants has been analyzed and an overall vulnerability score of 0 to 100 is ultimately assigned:

$$\begin{array}{r}
 \text{Natural Susceptibility (0 – 50 points)} \\
 + \\
 \text{Contaminant Risks (0 – 50 points)} \\
 = \\
 \text{Vulnerability of the} \\
 \text{Drinking Water Source to Contamination (0 – 100).}
 \end{array}$$

A score for the Natural Susceptibility is achieved by analyzing the properties of the well and the aquifer.

$$\begin{array}{r}
 \text{Susceptibility of the Wellhead (0 – 25 Points)} \\
 + \\
 \text{Susceptibility of the Aquifer (0 – 25 Points)} \\
 = \\
 \text{Natural Susceptibility (Susceptibility of the Well)} \\
 \text{(0 – 50 Points)}
 \end{array}$$

Appendix D contains eight charts, which together form the ‘Vulnerability Analysis’ for a source water assessment for a public drinking water source. Chart 1 analyzes the ‘Susceptibility of the Wellhead’ to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the ‘Susceptibility of the Aquifer’ to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes ‘Contaminant Risks’ for the drinking water source with respect to bacteria and viruses. The ‘Contaminant Risks’ portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the ‘Vulnerability Analysis for Bacteria and Viruses’. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

Table 2 shows the Overall Susceptibility score and rating for Totem Inn (see Charts 1 and 2).

Table 2. Natural Susceptibility - Susceptibility of the Wellhead and Aquifer to Contamination

| | Score | Rating |
|--------------------------------|-------|--------|
| Susceptibility of the Wellhead | 10 | Medium |
| Susceptibility of the Aquifer | 7 | Low |
| Natural Susceptibility | 17 | Low |

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This data has been derived from an examination of existing or historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants (see Charts 3, 5, and 7).

Table 3. Contaminant Risks

| Category | Score | Rating |
|----------------------------|-------|--------|
| Bacteria and Viruses | 12 | Low |
| Nitrates and/or Nitrites | 15 | Low |
| Volatile Organic Chemicals | 12 | Low |

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five (see Charts 4, 6, and 8).

Table 4. Overall Vulnerability of Totem Inn to Contamination by Category

| Category | Score | Rating |
|----------------------------|-------|--------|
| Bacteria and Viruses | 30 | Low |
| Nitrates and Nitrites | 30 | Low |
| Volatile Organic Chemicals | 30 | Low |

Tables 2 through 4 in Appendix B contain a list of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

Only a small amount of bacteria and viruses are required to endanger public health. If bacteria and viruses have been detected during recent water sampling of the system at Totem Inn, the result is a maximum score on Chart 3.

The sampling history for Totem Inn well indicates that nitrates and/or nitrites are found in natural background concentration at this site, as elsewhere throughout Alaska. Nitrate concentrations in uncontaminated groundwater are typically less than 2 milligrams per liter (mg/L) and are derived primarily from the decomposition of organic matter in soils [Wang, Strelakos, Jokela, 2000]. Existing nitrate concentration in Totem Inn well is approximately 0.7 mg/L or 7% of the Maximum Contaminant Level (MCL) of 10mg/L. The MCL is the maximum level of contaminant that is allowed to exist in drinking water and still be consumed by humans without harmful health effects. Due to the high solubility and weak retention by soil, nitrates are very mobile, moving at approximately the same rate as water. Though existing nitrate contamination was detected at the site, concentrations remain at safe levels with respect to human health (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D).

Class B Public Water systems are not required to test

for volatile organic chemicals (VOCs); therefore, no score for pre-existing contamination has been assigned. The vulnerability score for VOCs reflects the potential for contamination from the sources indicated on Table 4 in Appendix B.

SUMMARY

A *Source Water Assessment* has been completed for the sources of public drinking water serving Totem Inn. The overall vulnerability of this source to contamination is **Low** for bacteria and viruses, **Low** for nitrates and nitrites, and **Low** for volatile organic chemicals. This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of Totem Inn to protect public health. It is anticipated that *Source Water Assessments* will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of Totem Inn public drinking water source.

REFERENCES CITED

- Alaska Climate Research Center (ACRC), 2002 [WWW document]. URL
<http://climate.gi.alaska.edu/climatology/data.html>.
- Alaska Department of Community and Economic Development (ADCED), 2002 [WWW document]. URL
http://www.dced.state.ak.us/cbd/commdb/CF_BLOCK.cfm
- Patrick, L.D., Brabets, T.P., and Glass, R.L., 1989, Simulation of ground-water flow at Anchorage, Alaska: US Geological Survey Water-Resources Investigations Report 88-4139, 41p.
- Wahrhaftig, C., 1970, *Geologic Map of the Healy D-4 Quadrangle, Alaska*, Department of the Interior, United States Geological Survey, Geologic Quadrangle Maps of the United States series, Map GQ-806, Washington, DC.
- Wang, B., Strelakos, P.M., and Jokela, B., 2000, Nitrate Source Indicators In Groundwater of the Scimitar Subdivision, Peters Creek Area, Anchorage Alaska: U.S. Geological Survey Water-Resources Investigations Report 00-4137, 25p.


APPENDIX A

Totem Inn Drinking Water Protection Area (Map 1)

Drinking Water Protection Area for Totem Inn



- Totem Inn Well
- ▭ Zone A (Few Months Travel Time)
- ▭ Zone B (Less Than 2 Years Travel Time)
- ▭ Zone C (Less Than 5 Years Travel Time)



PWSID 390439.001

Map 1

APPENDIX B

Contaminant Source Inventory and Risk Ranking for Totem Inn (Tables 1-4)

Table 1

**Contaminant Source Inventory for
Totem Inn**

PWSID 390439.001

| Contaminant Source Type | Contaminant Source ID | CS ID tag | Zone | Location | Map Number | Comments |
|--|------------------------------|------------------|-------------|------------------|-------------------|---------------------------------|
| Septic systems (serves one single-family home) | R02 | R2-1 | A | TOTEM INN | 2 | INFERRED FROM SITE LOCATION MAP |
| Highways and roads, paved (cement or asphalt) | X20 | X20-1 | A | PARK'S HWY | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-1 | A | LOCAL HEALY ROAD | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-2 | C | LOCAL HEALY ROAD | 2 | |

Table 2

*Contaminant Source Inventory and Risk Ranking for
Totem Inn
Sources of Bacteria and Viruses*

PWSID 390439.001

| <i>Contaminant Source Type</i> | <i>Contaminant Source ID</i> | <i>CS ID tag</i> | <i>Zone</i> | <i>Risk Ranking for Analysis</i> | <i>Location</i> | <i>Map Number</i> | <i>Comments</i> |
|--|------------------------------|------------------|-------------|----------------------------------|------------------|-------------------|---------------------------------|
| Septic systems (serves one single-family home) | R02 | R2-1 | A | Low | TOTEM INN | 2 | INFERRED FROM SITE LOCATION MAP |
| Highways and roads, paved (cement or asphalt) | X20 | X20-1 | A | Low | PARK'S HWY | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-1 | A | Low | LOCAL HEALY ROAD | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-2 | C | Low | LOCAL HEALY ROAD | 2 | |

Table 3

*Contaminant Source Inventory and Risk Ranking for
Totem Inn
Sources of Nitrates/Nitrites*

PWSID 390439.001

| <i>Contaminant Source Type</i> | <i>Contaminant Source ID</i> | <i>CS ID tag</i> | <i>Zone</i> | <i>Risk Ranking for Analysis</i> | <i>Location</i> | <i>Map Number</i> | <i>Comments</i> |
|--|------------------------------|------------------|-------------|----------------------------------|------------------|-------------------|---------------------------------|
| Septic systems (serves one single-family home) | R02 | R2-1 | A | Low | TOTEM INN | 2 | INFERRED FROM SITE LOCATION MAP |
| Highways and roads, paved (cement or asphalt) | X20 | X20-1 | A | Low | PARK'S HWY | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-1 | A | Low | LOCAL HEALY ROAD | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-2 | C | Low | LOCAL HEALY ROAD | 2 | |

Table 4

Contaminant Source Inventory and Risk Ranking for
Totem Inn

PWSID 390439.001


Sources of Volatile Organic Chemicals

| <i>Contaminant Source Type</i> | <i>Contaminant Source ID</i> | <i>CS ID tag</i> | <i>Zone</i> | <i>Risk Ranking for Analysis</i> | <i>Location</i> | <i>Map Number</i> | <i>Comments</i> |
|--|------------------------------|------------------|-------------|----------------------------------|------------------|-------------------|---------------------------------|
| Septic systems (serves one single-family home) | R02 | R2-1 | A | Low | TOTEM INN | 2 | INFERRED FROM SITE LOCATION MAP |
| Highways and roads, paved (cement or asphalt) | X20 | X20-1 | A | Low | PARK'S HWY | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-1 | A | Low | LOCAL HEALY ROAD | 2 | |
| Highways and roads, dirt/gravel | X24 | X24-2 | C | Low | LOCAL HEALY ROAD | 2 | |


APPENDIX C

Totem Inn Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map 2)

Drinking Water Protection Area for Totem Inn and Potential and Existing Sources of Contamination

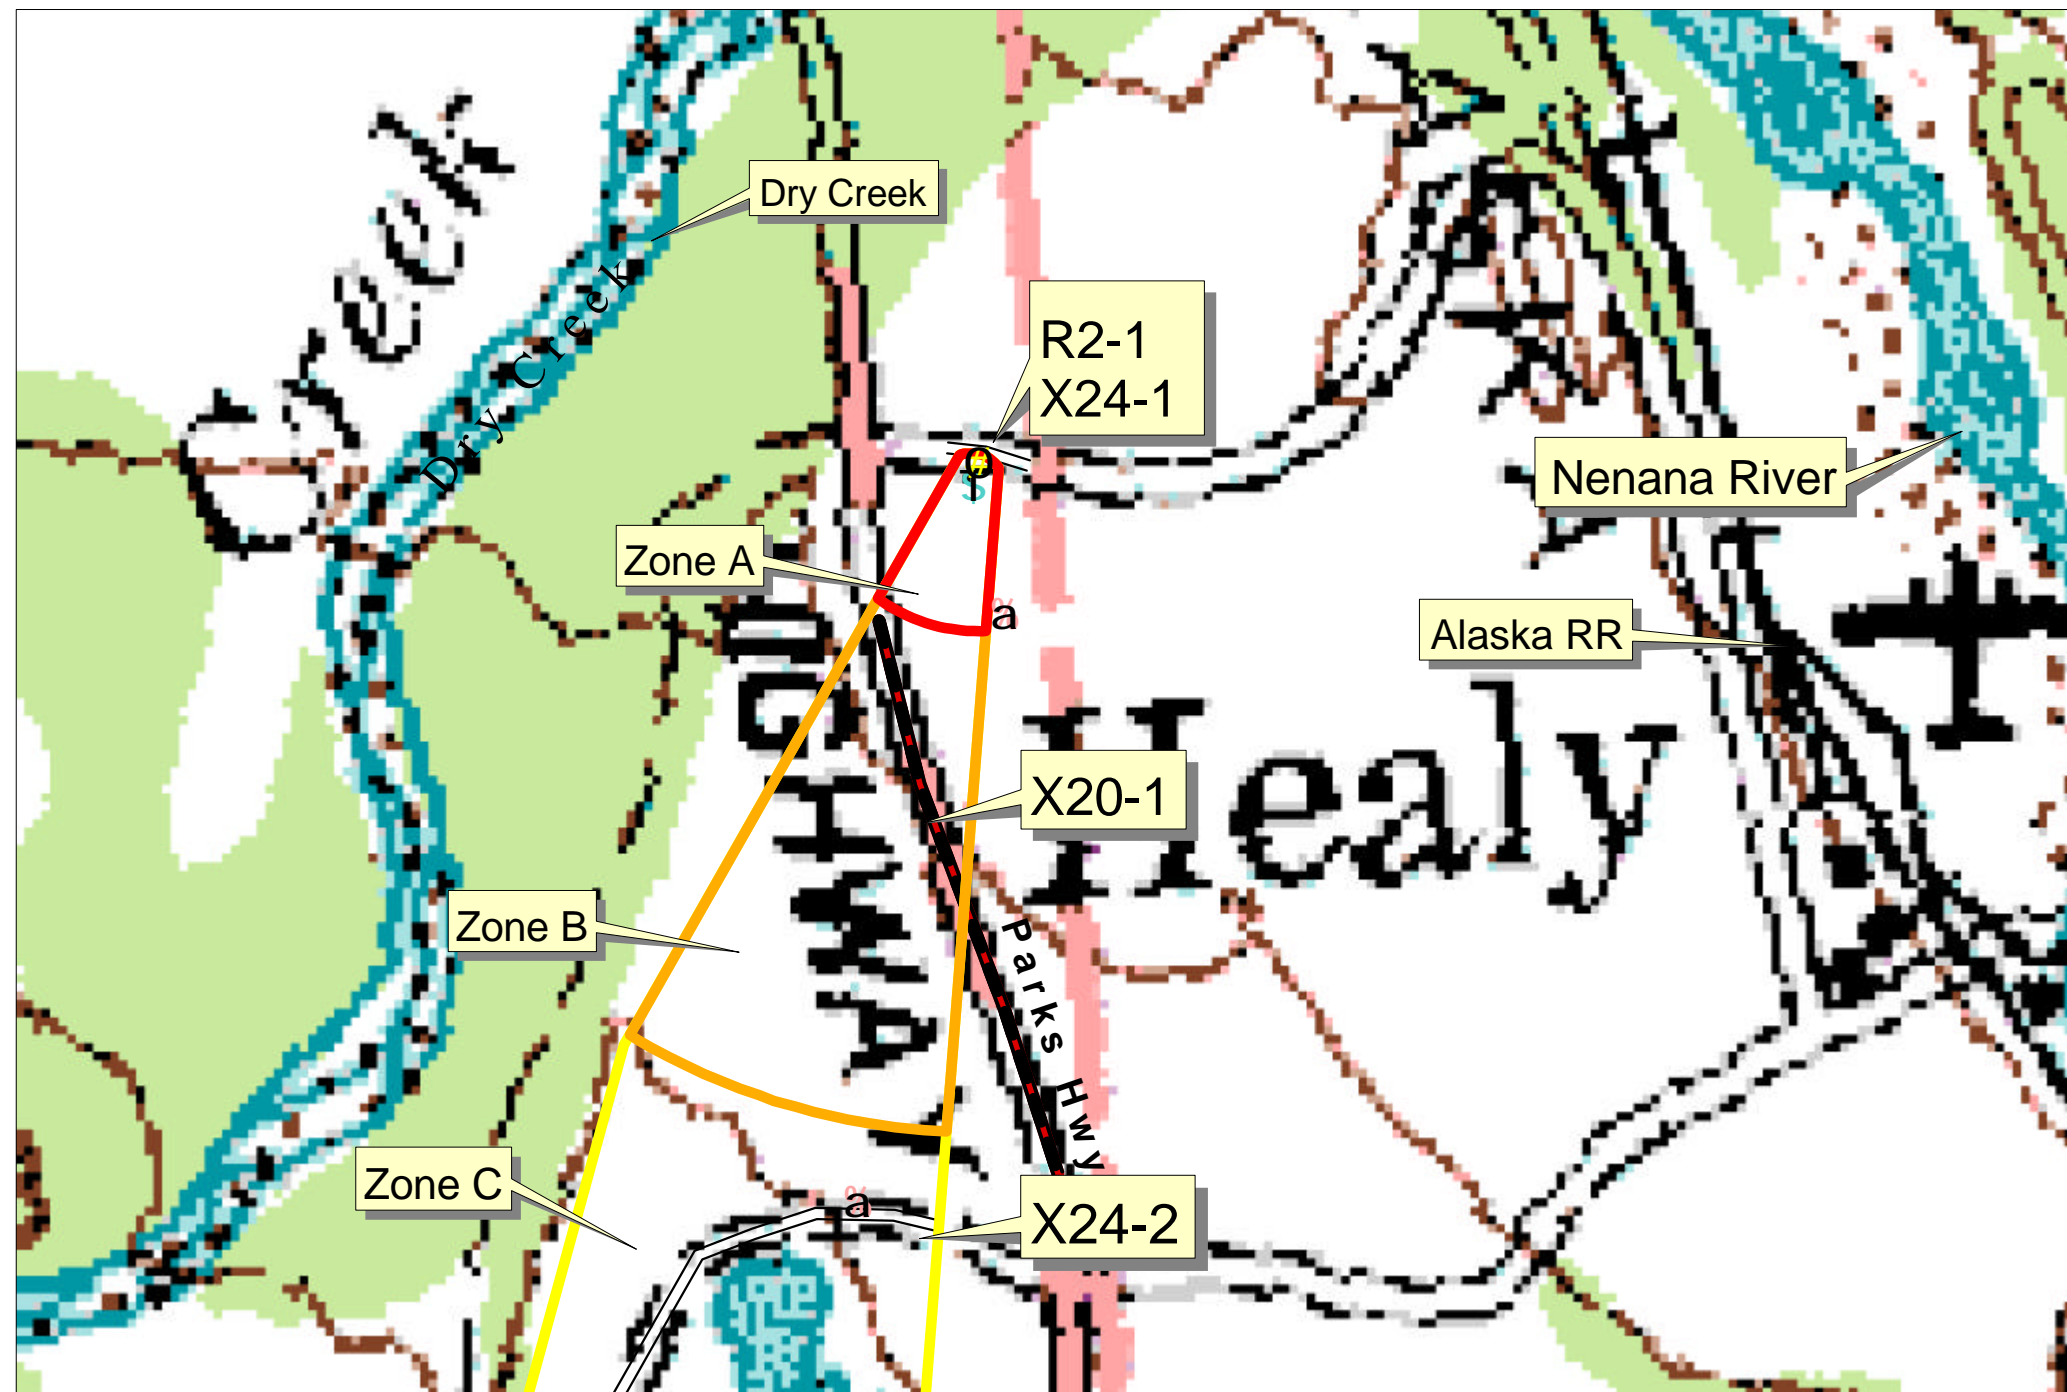

- Water Sources**
- Totem Inn
 - Public Water Wells
 - Septic Sytem-R2
- Zones**
- Zone A (Few Months Travel Time)
 - Zone B (Less Than 2 Years Travel Time)
 - Zone C (Less Than 5 Years Travel Time)
- Roads**
- Paved-X20
 - Dirt-X24



APPENDIX D

Vulnerability Analysis for Totem Inn Public Drinking Water Source (Charts 1-8)

Chart 1. Susceptibility of the wellhead - Totem Inn

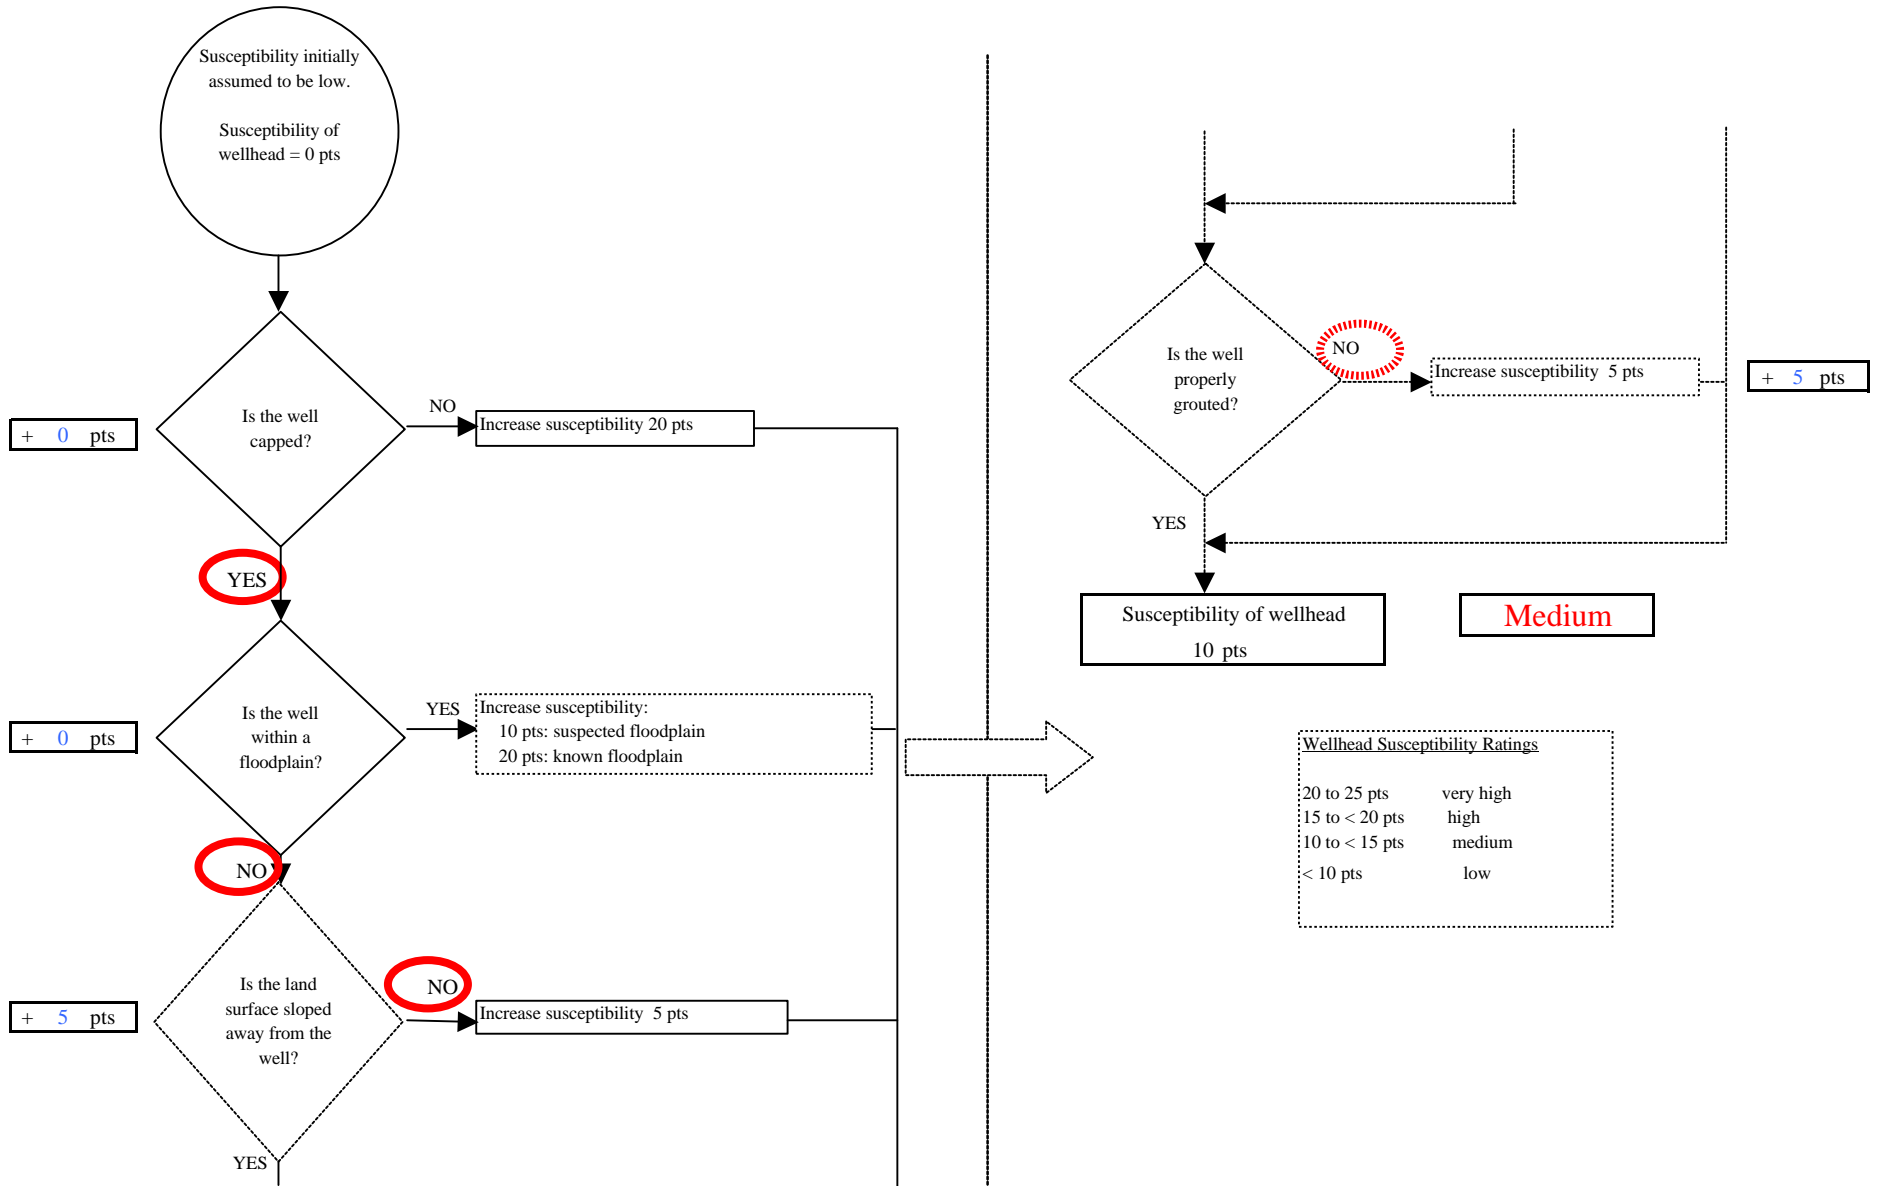


Chart 2. Susceptibility of the aquifer - Totem Inn




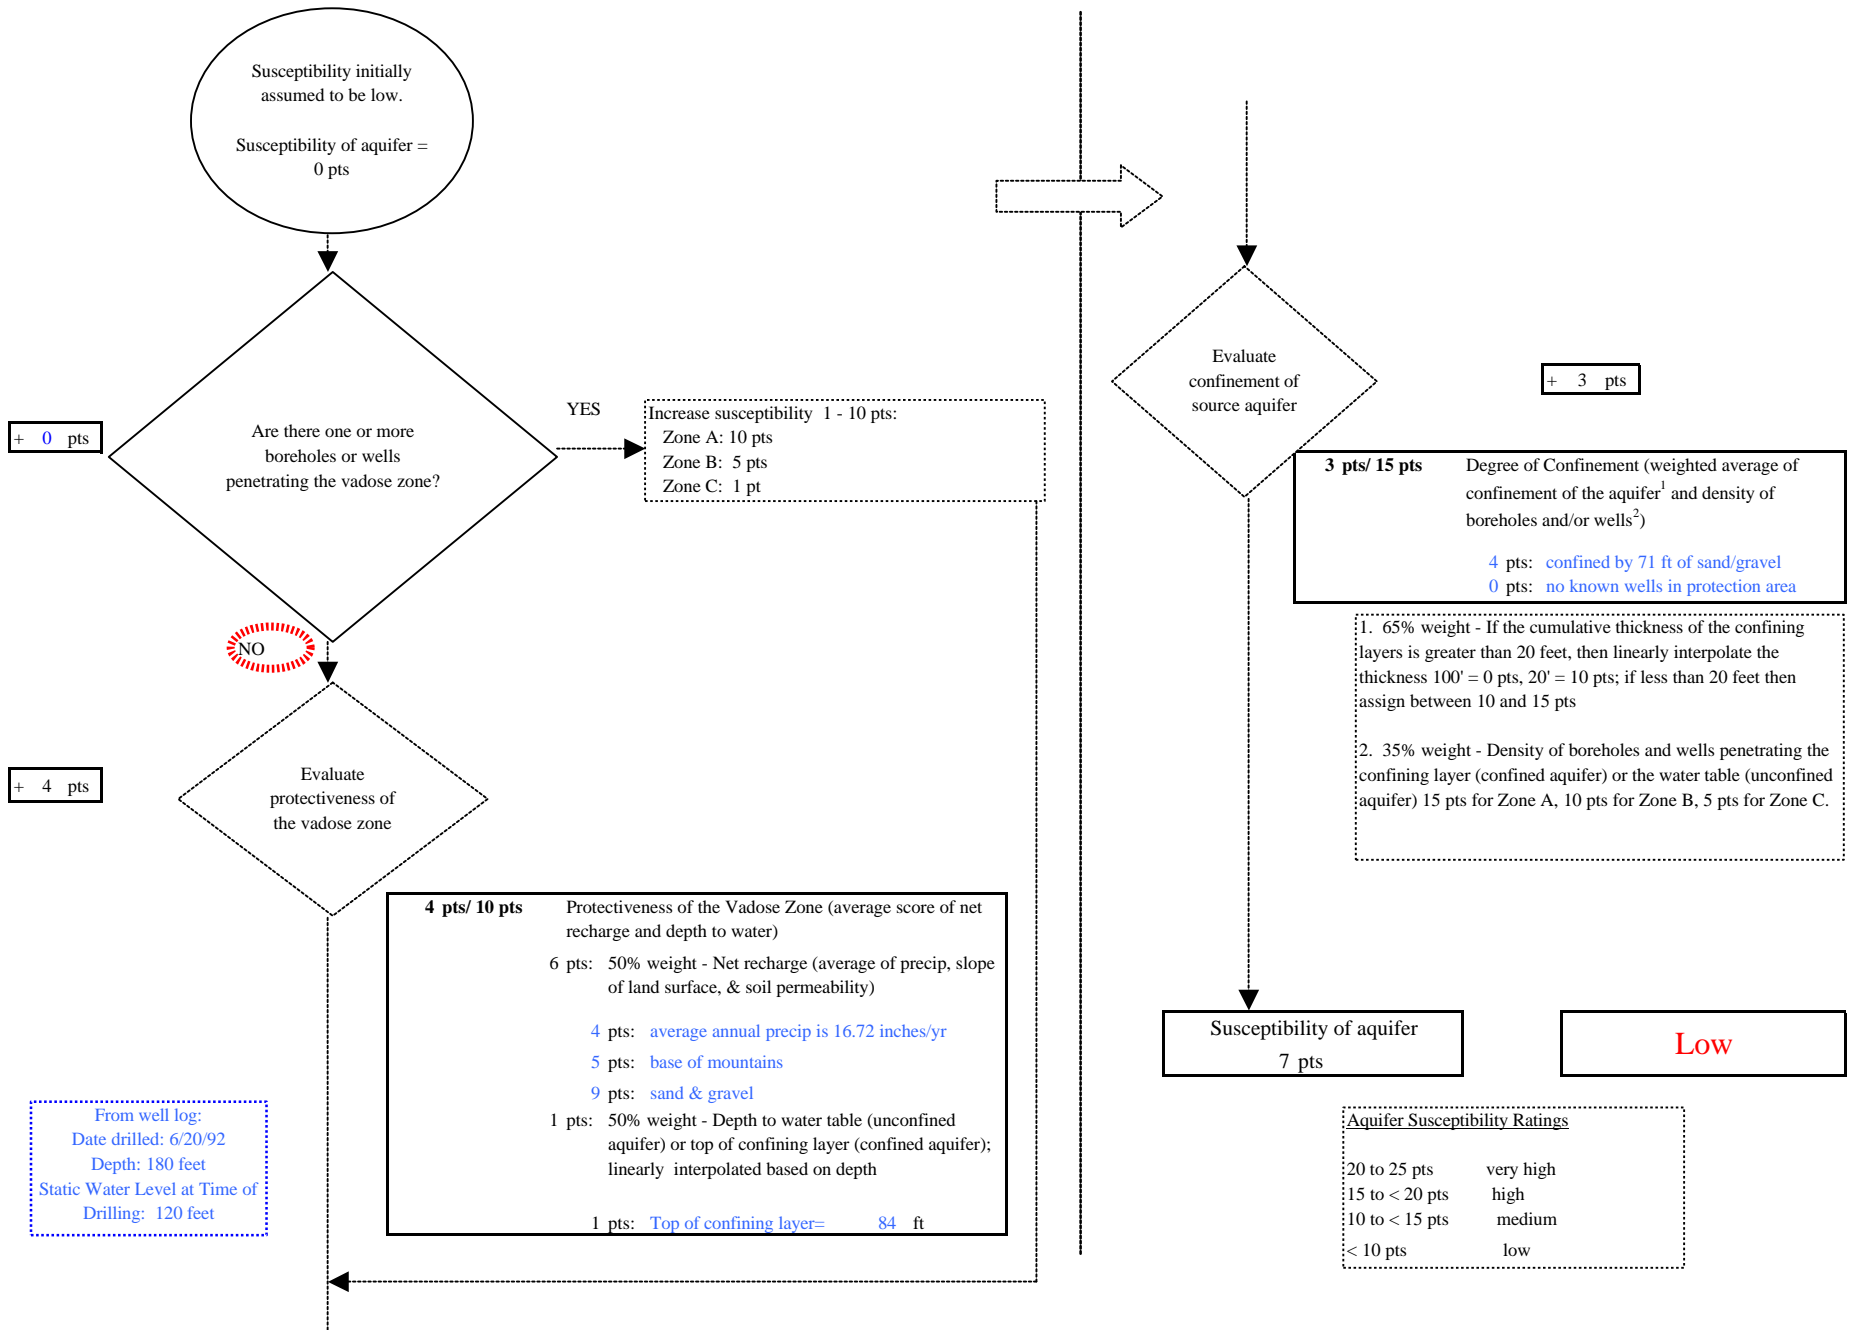


Chart 3. Contaminant risks for *Totem Inn - Bacteria & Viruses*

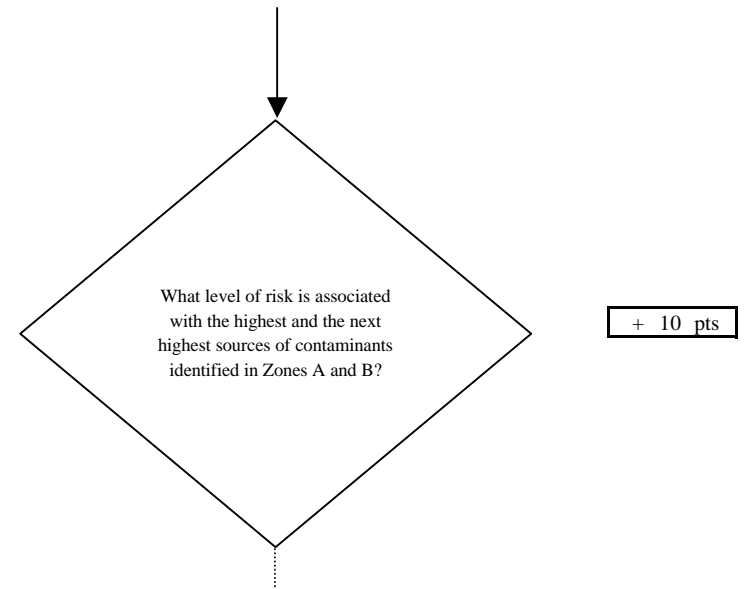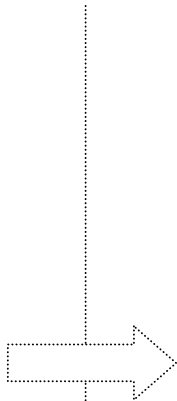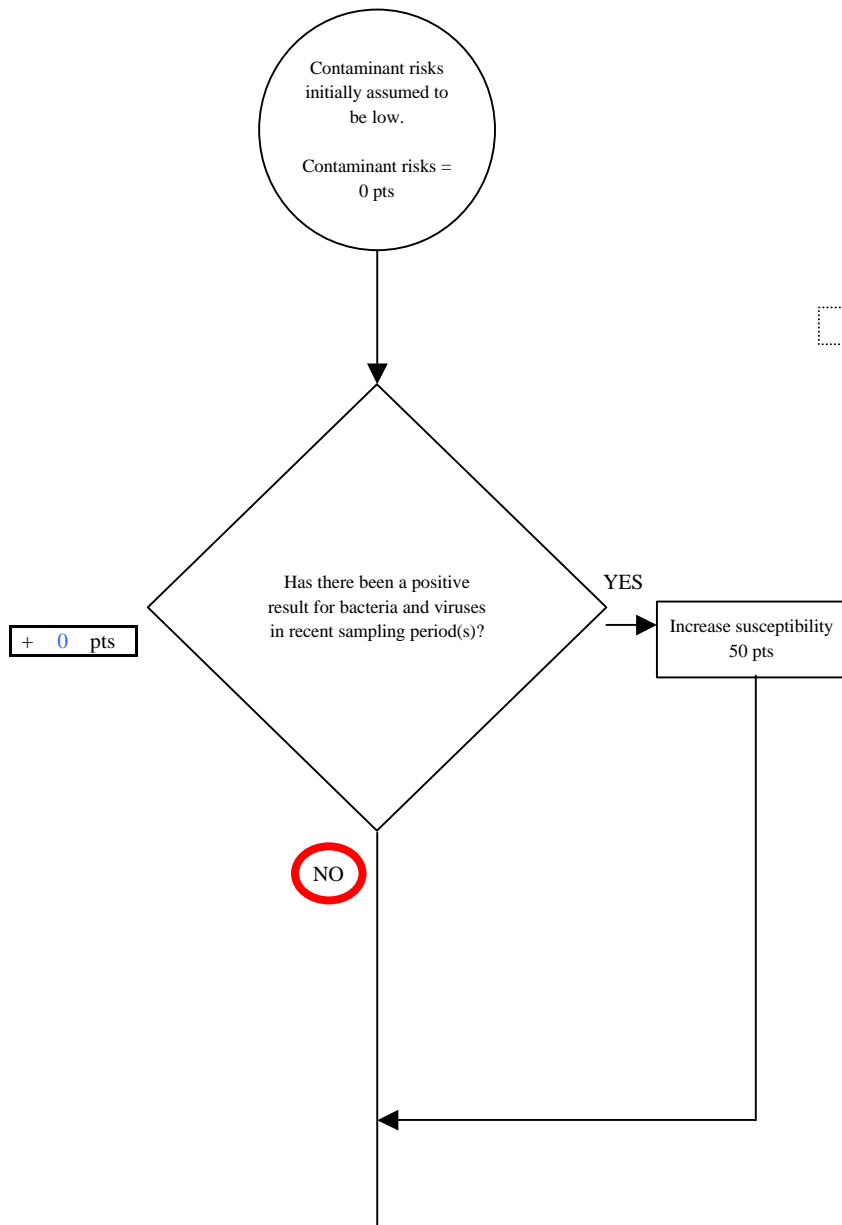

| Risk Rankings for Contaminant Sources Identified in Zones A and B | | | |
|---|--------|--------|-------|
| | Zone A | Zone B | Total |
| Very High(s) | 0 | 0 | 0 |
| High(s) | 0 | 0 | 0 |
| Medium(s) | 0 | 0 | 0 |
| Low(s) | 2 | 0 | 2 |

| | LOW 10 pts | MEDIUM 20 pts | HIGH 30 pts | VERY HIGH 40 pts |
|------------------|-------------------------------------|-------------------------|-------------------------|----------------------------|
| LOW | ³ 10 sources + 10 pts | ≥ 10 sources + 5 pts | ≥ 20 sources + 5 pts | ---- |
| MEDIUM | ---- | ≥ 2 sources + 5 pts | ≥ 5 sources + 5 pts | ≥ 10 sources + 5 pts |
| HIGH | ---- | ---- | ≥ 1 source + 10 pts | ≥ 2 sources + 10 pts |
| VERY HIGH | ---- | ---- | ---- | ≥ 1 source + 10 pts |

Matrix Score 10

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

Chart 3. Contaminant risks for Totem Inn - Bacteria & Viruses.

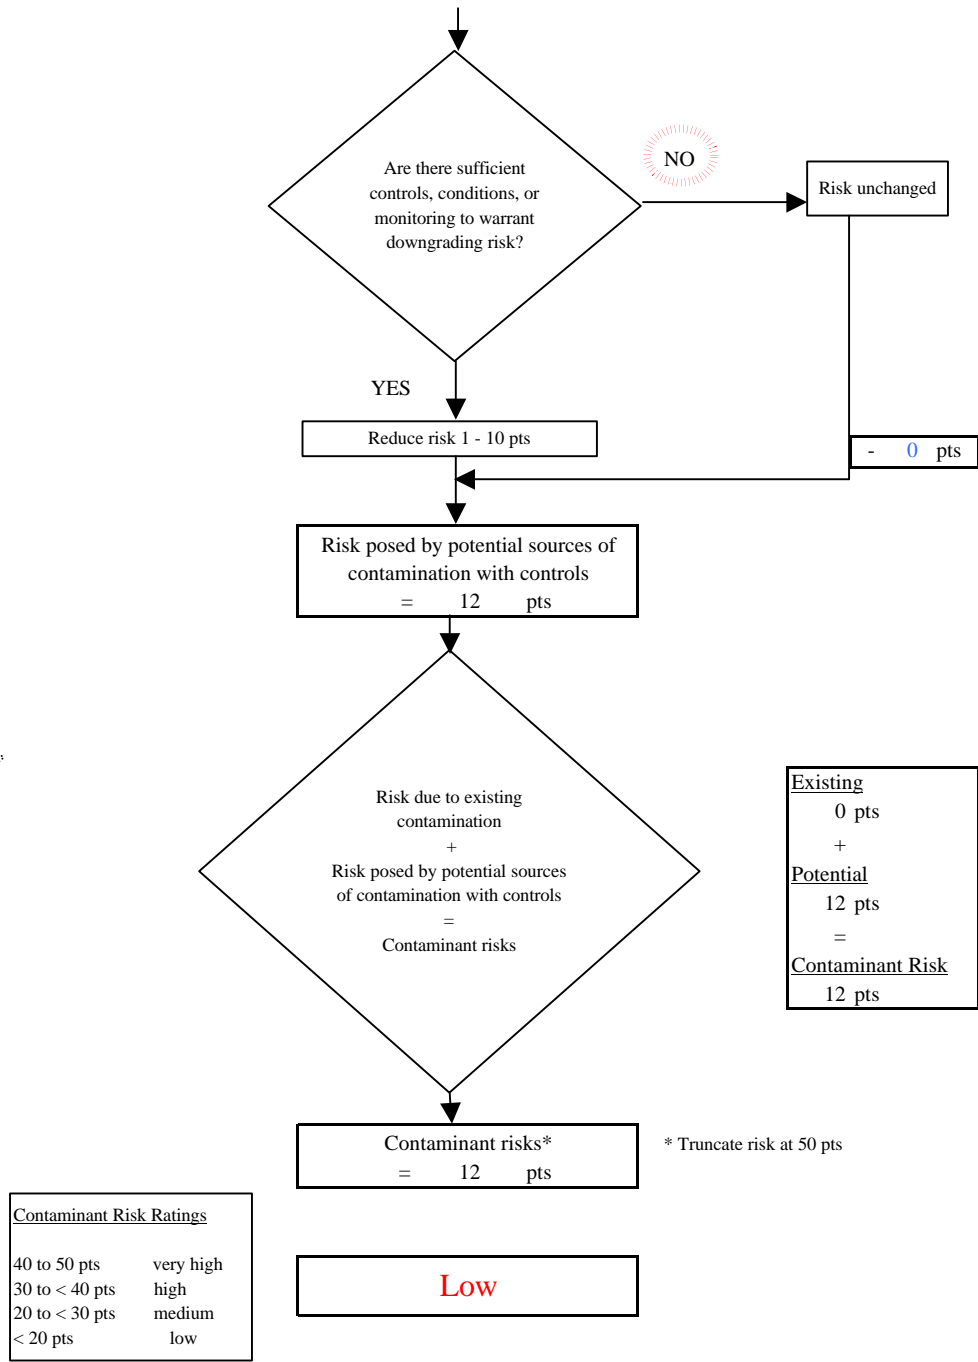

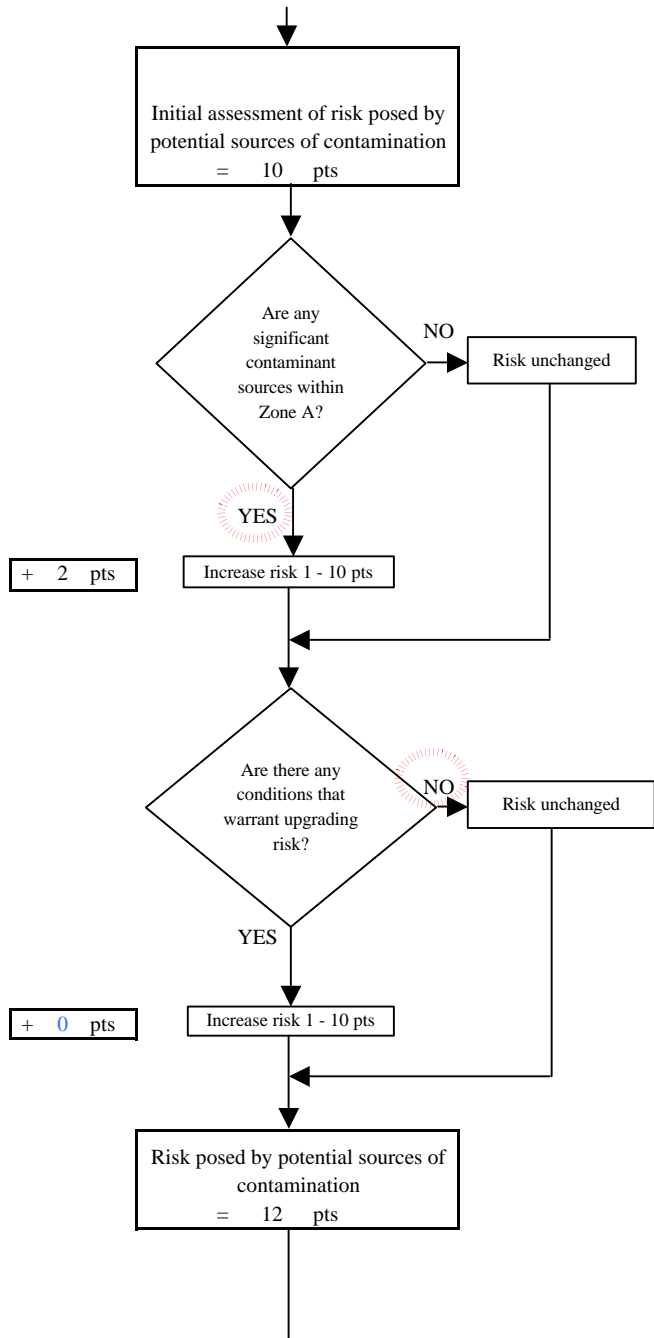


Chart 4. Vulnerability analysis for Totem Inn - Bacteria & Viruses

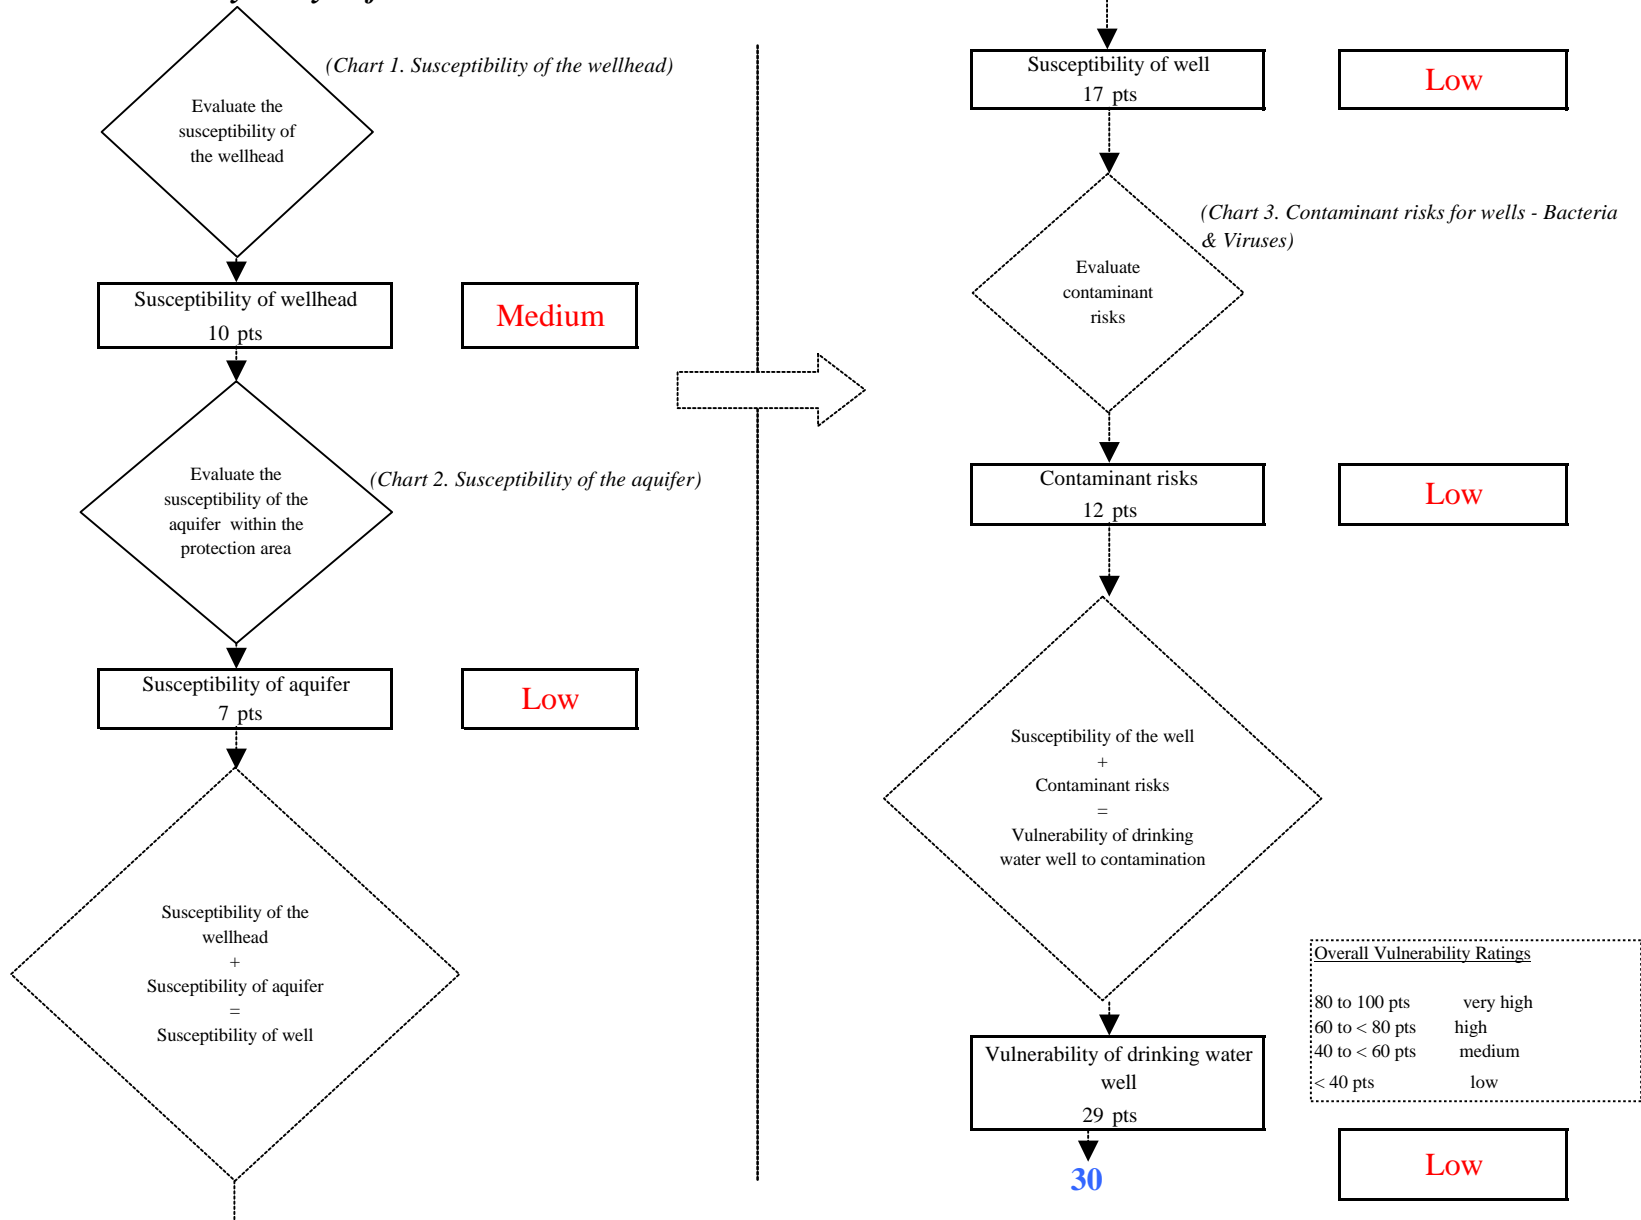


Chart 5. Contaminant risks for *Totem Inn* - Nitrates and Nitrites


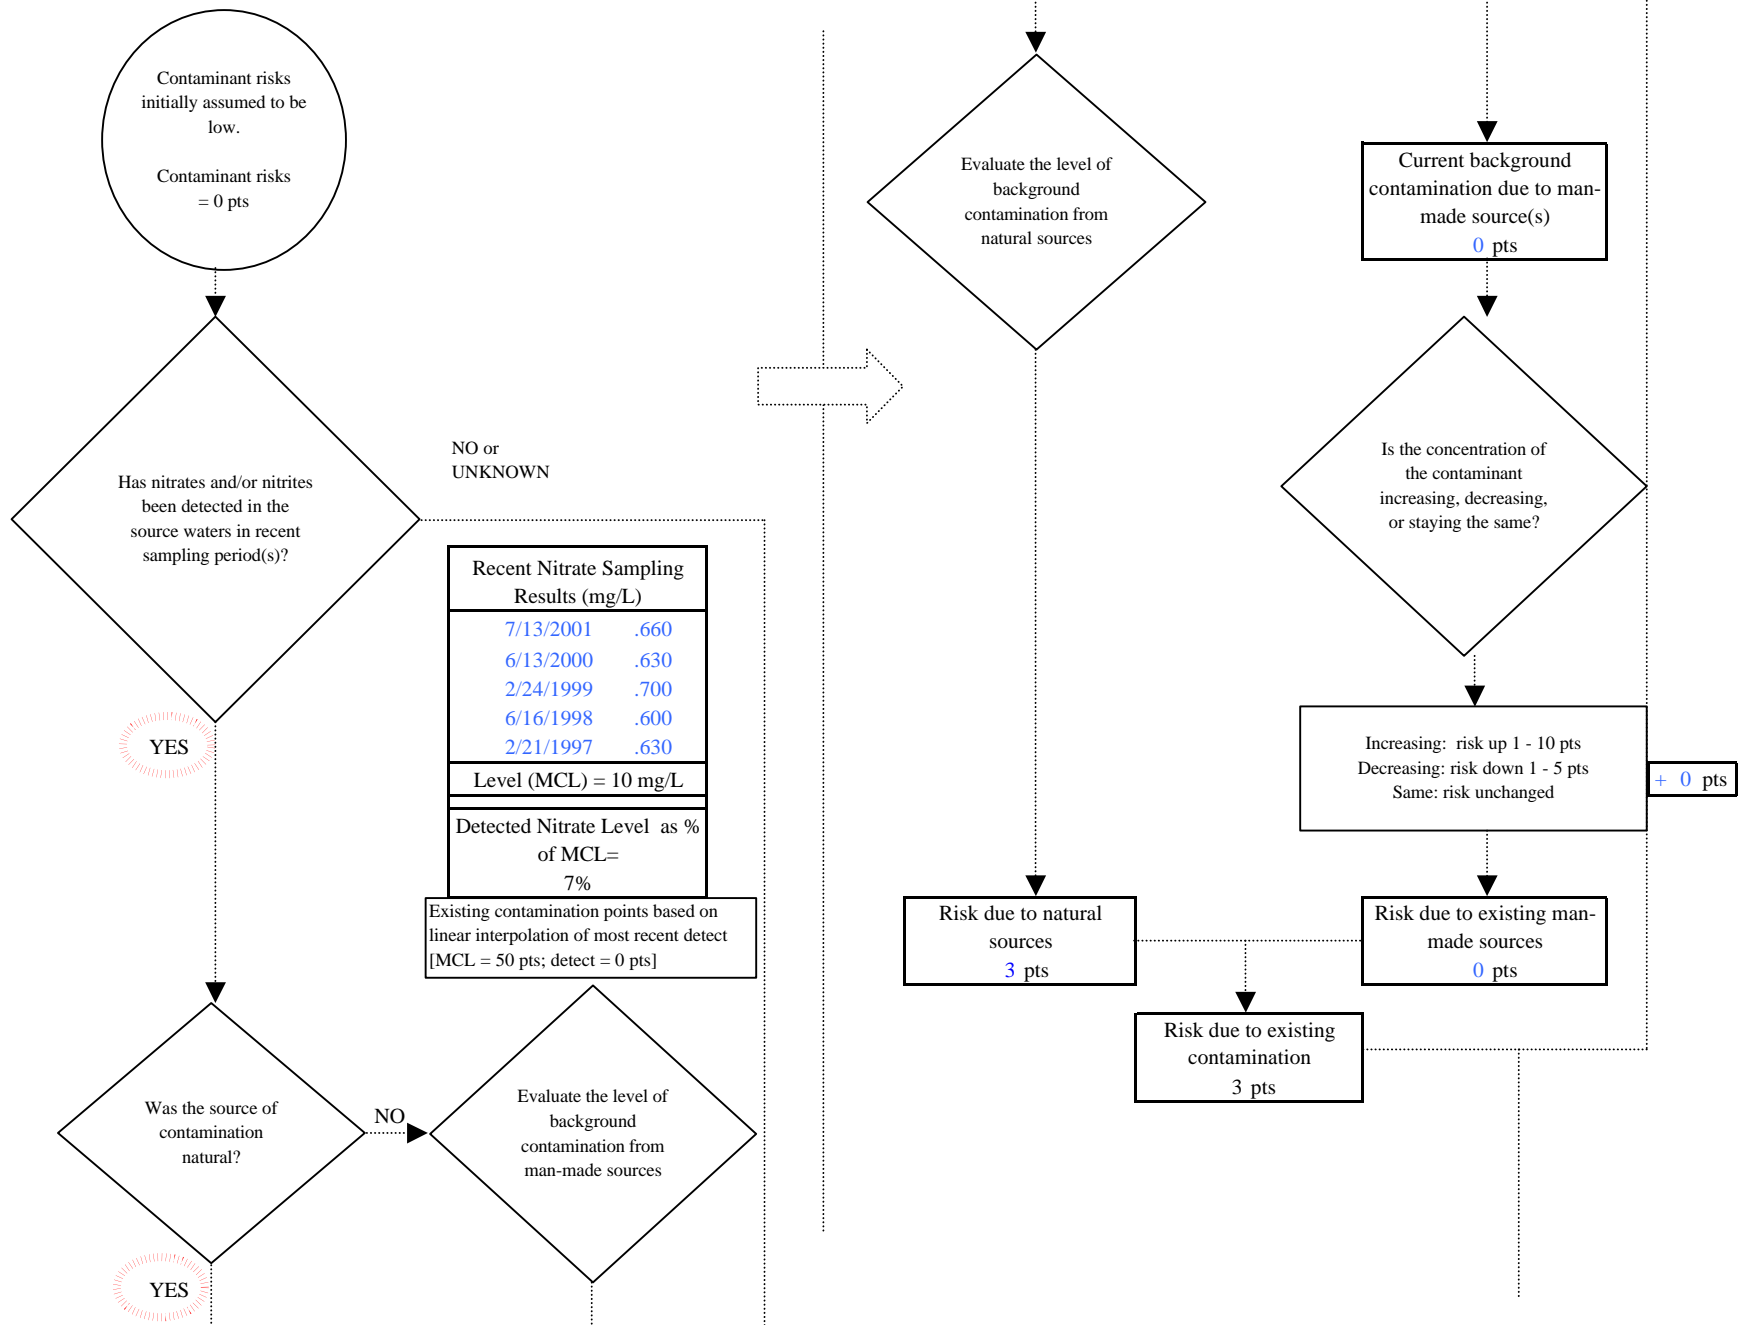


Chart 5. Contaminant risks for Totem Inn - Nitrates and Nitrites

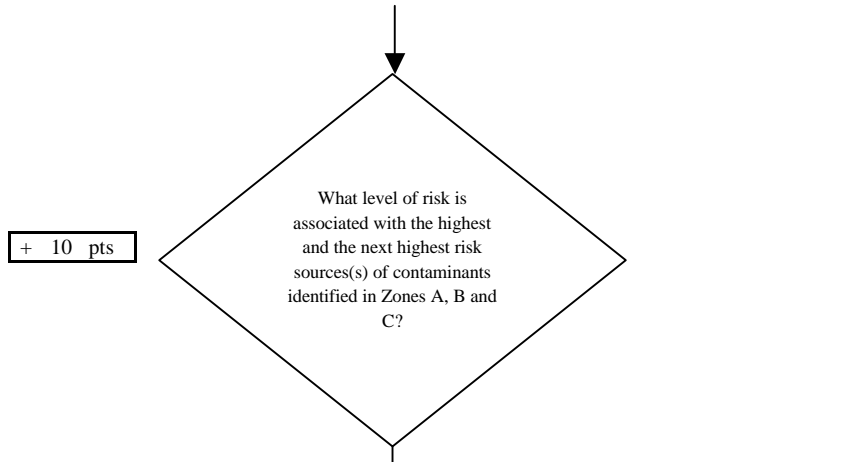

| | Zone A | Zones B&C | Total |
|--------------|--------|-----------|-------|
| Very High(s) | 0 | 0 | 0 |
| High(s) | 0 | 0 | 0 |
| Medium(s) | 0 | 0 | 0 |
| Low(s) | 2 | 1 | 3 |

| | LOW 10 pts | MEDIUM 20 pts | HIGH 30 pts | VERY HIGH 40 pts |
|------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| LOW | ≈ 10 sources + 10 pts | ≥ 10 sources + 5 pts | ≥ 20 sources + 5 pts | ---- |
| MEDIUM | ---- | ≥ 2 sources + 5 pts | ≥ 5 sources + 5 pts | ≥ 10 sources + 5 pts |
| HIGH | ---- | ---- | ≥ 1 source + 10 pts | ≥ 2 sources + 10 pts |
| VERY HIGH | ---- | ---- | ---- | ≥ 1 source + 10 pts |

Matrix Score 10

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

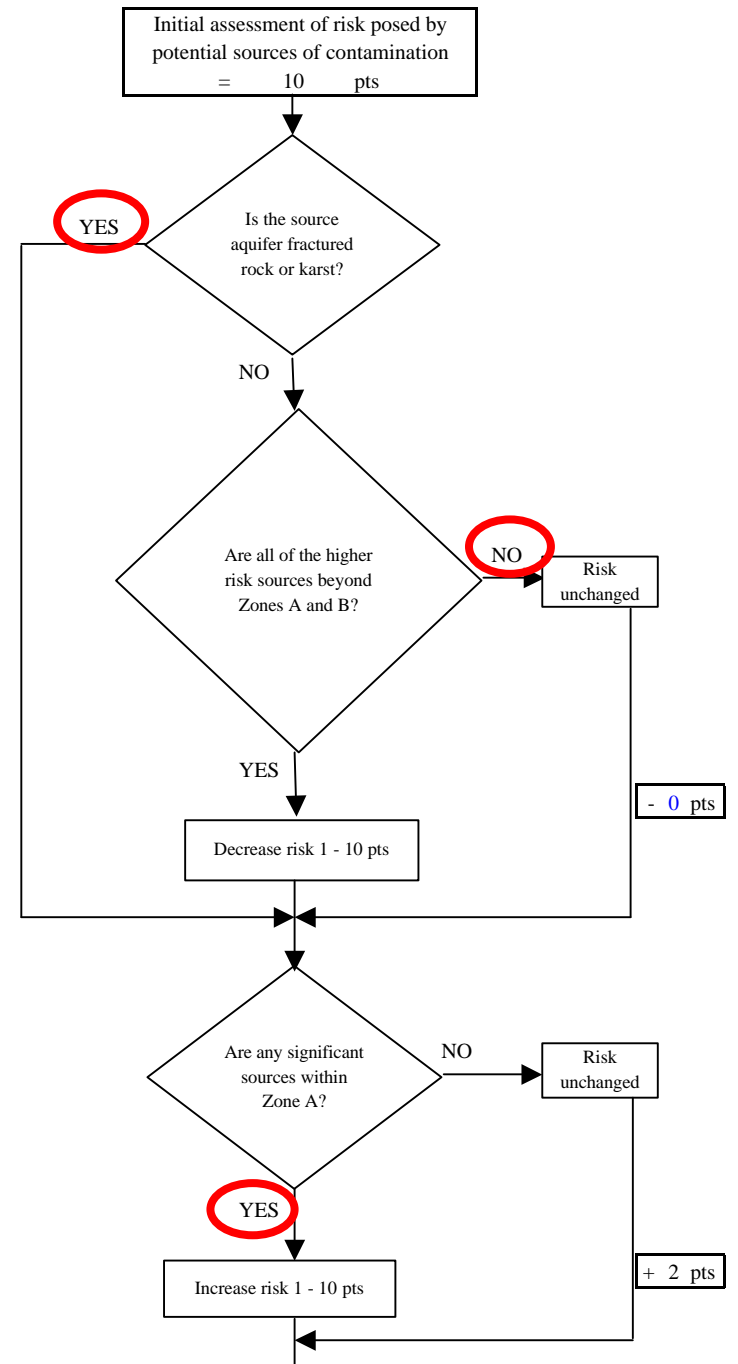


Chart 5. Contaminant risks for Totem Inn - Nitrates and Nitrites

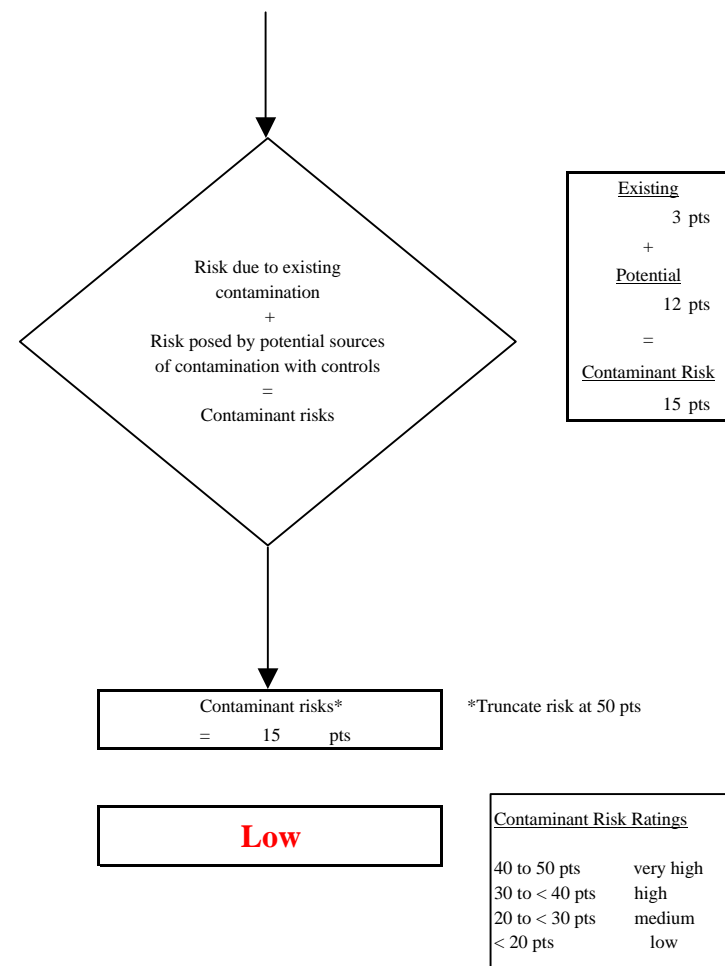

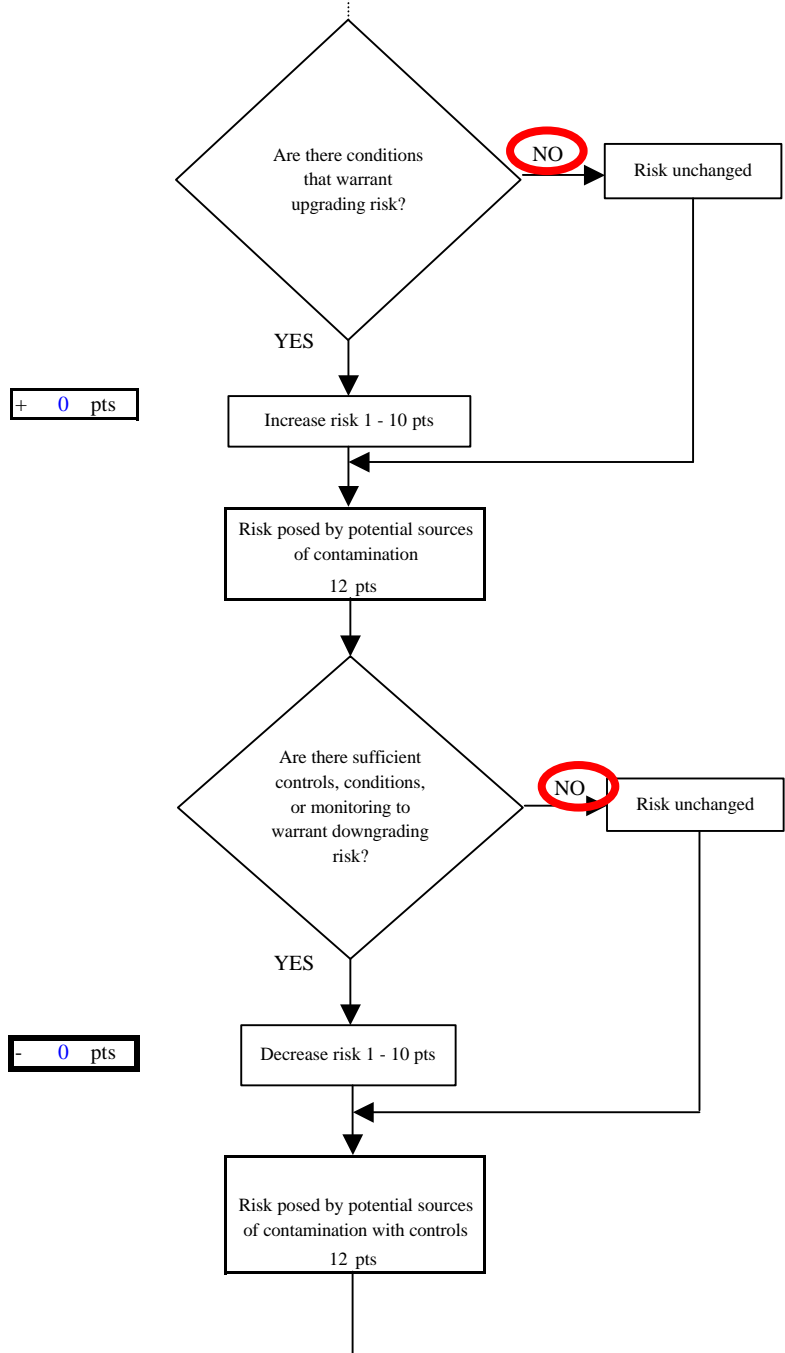


Chart 6. Vulnerability analysis for Totem Inn - Nitrates and Nitrites

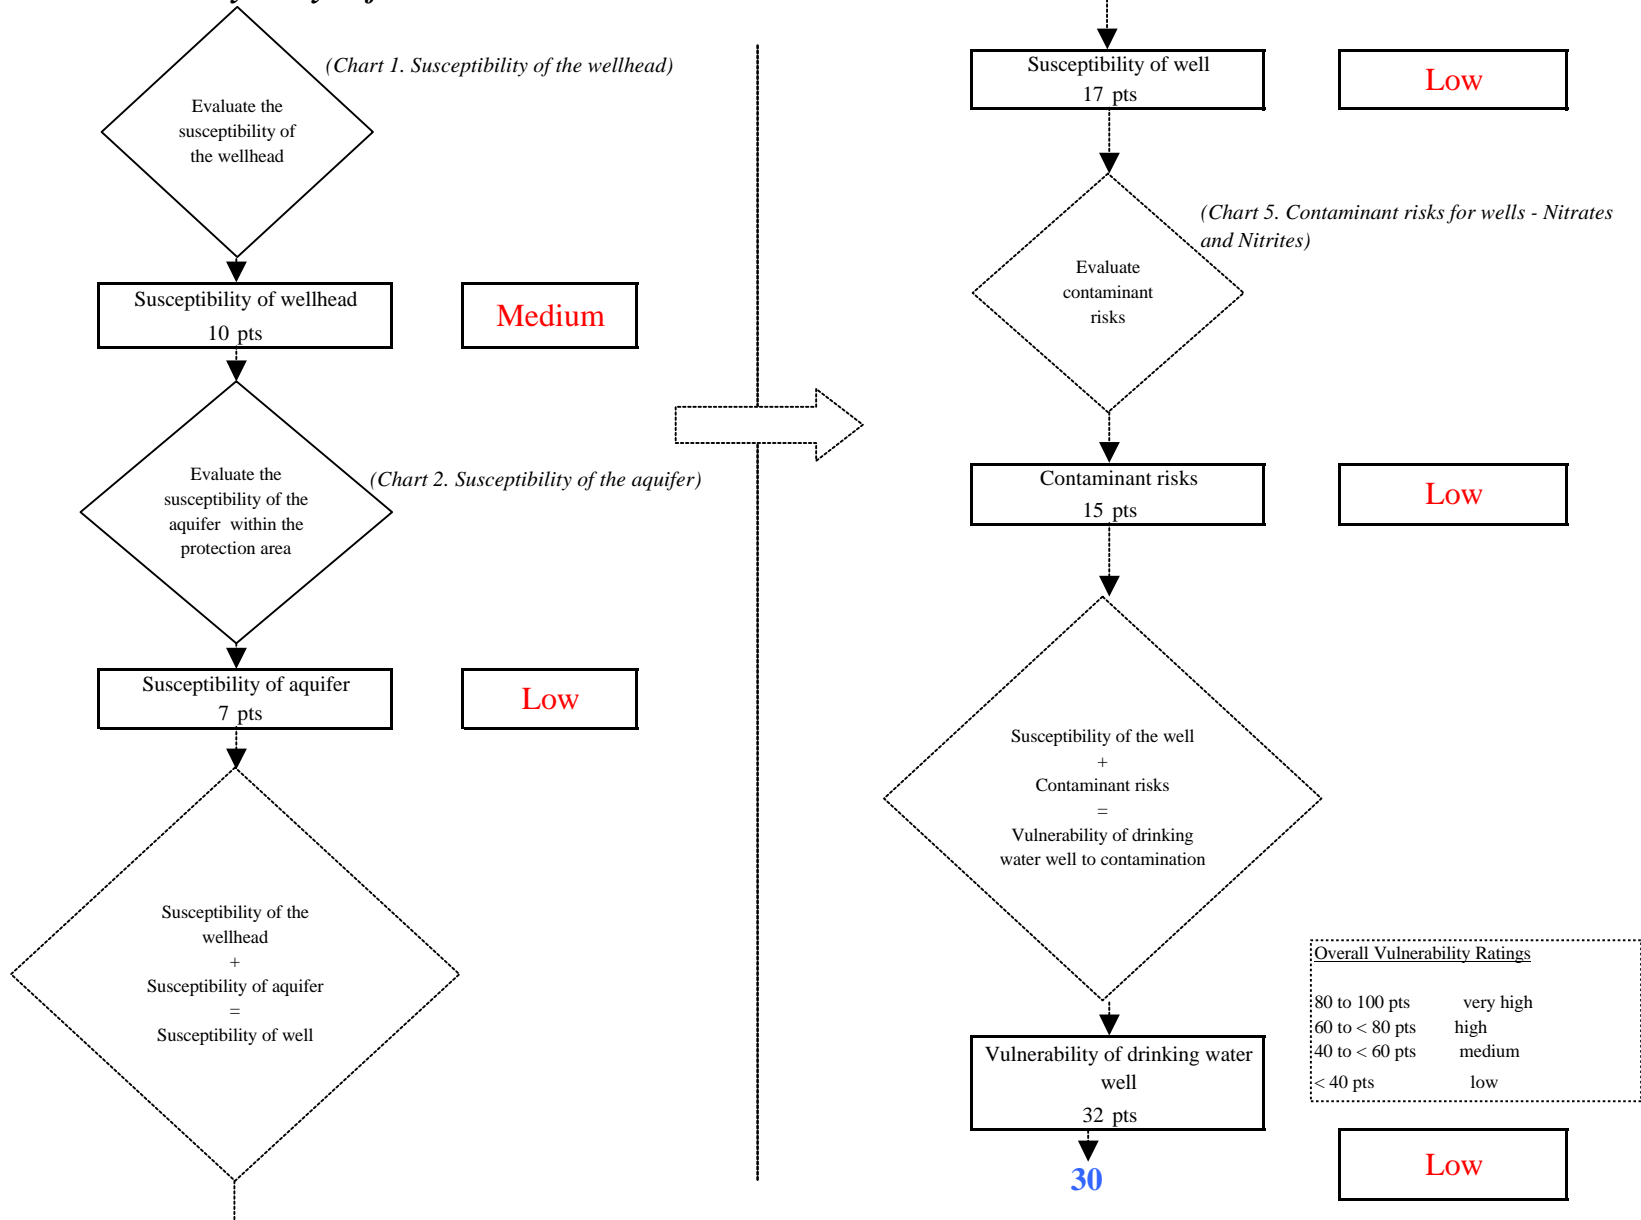


Chart 7. Contaminant risks for *Totem Inn* - Volatile Organic Chemicals


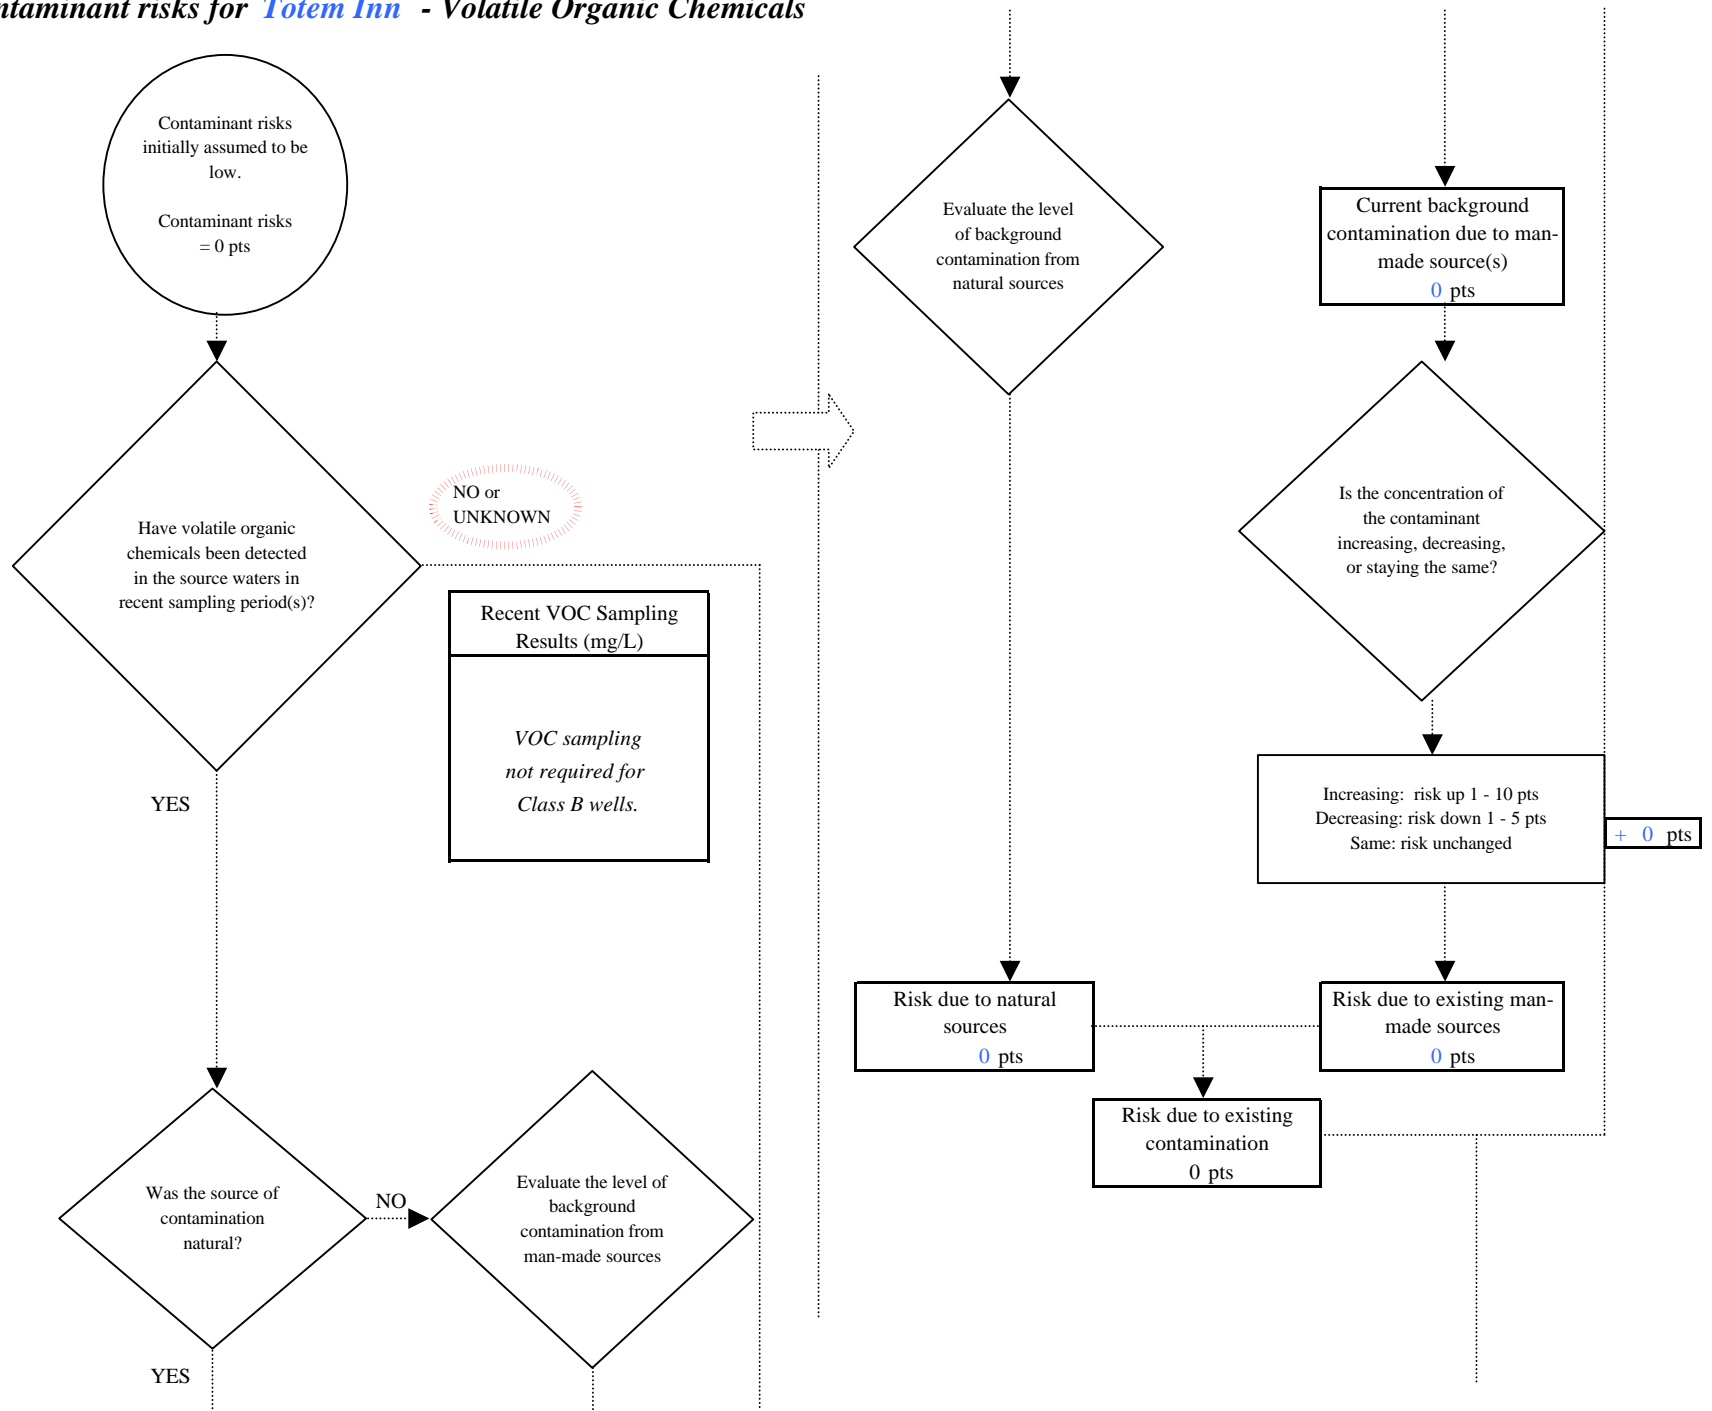


Chart 7. Contaminant risks for Totem Inn - Volatile Organic Chemicals

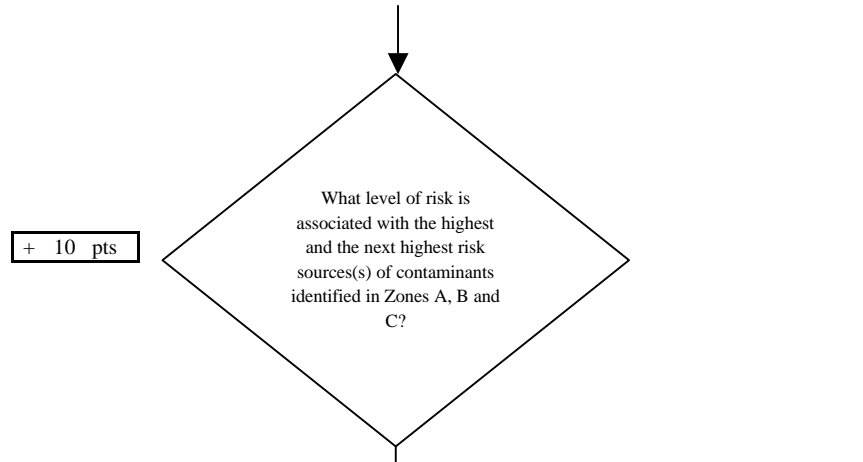

| | Zone A | Zones B&C | Total |
|--------------|--------|-----------|-------|
| Very High(s) | 0 | 0 | 0 |
| High(s) | 0 | 0 | 0 |
| Medium(s) | 0 | 0 | 0 |
| Low(s) | 2 | 1 | 3 |

| | LOW 10 pts | MEDIUM 20 pts | HIGH 30 pts | VERY HIGH 40 pts |
|------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| LOW | ≥ 10 sources + 10 pts | ≥ 10 sources + 5 pts | ≥ 20 sources + 5 pts | ---- |
| MEDIUM | ---- | ≥ 2 sources + 5 pts | ≥ 5 sources + 5 pts | ≥ 10 sources + 5 pts |
| HIGH | ---- | ---- | ≥ 1 source + 10 pts | ≥ 2 sources + 10 pts |
| VERY HIGH | ---- | ---- | ---- | ≥ 1 source + 10 pts |

Matrix Score 10

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

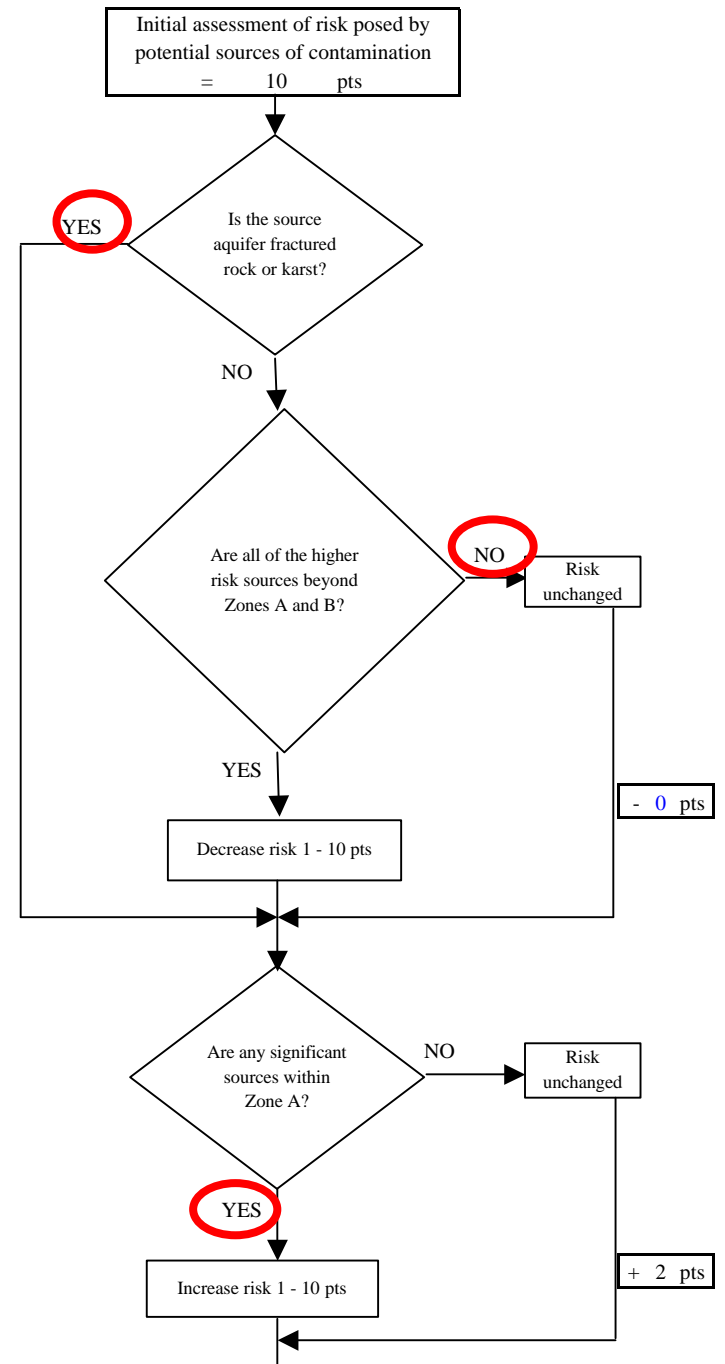


Chart 7. Contaminant risks for Totem Inn - Volatile Organic Chemicals



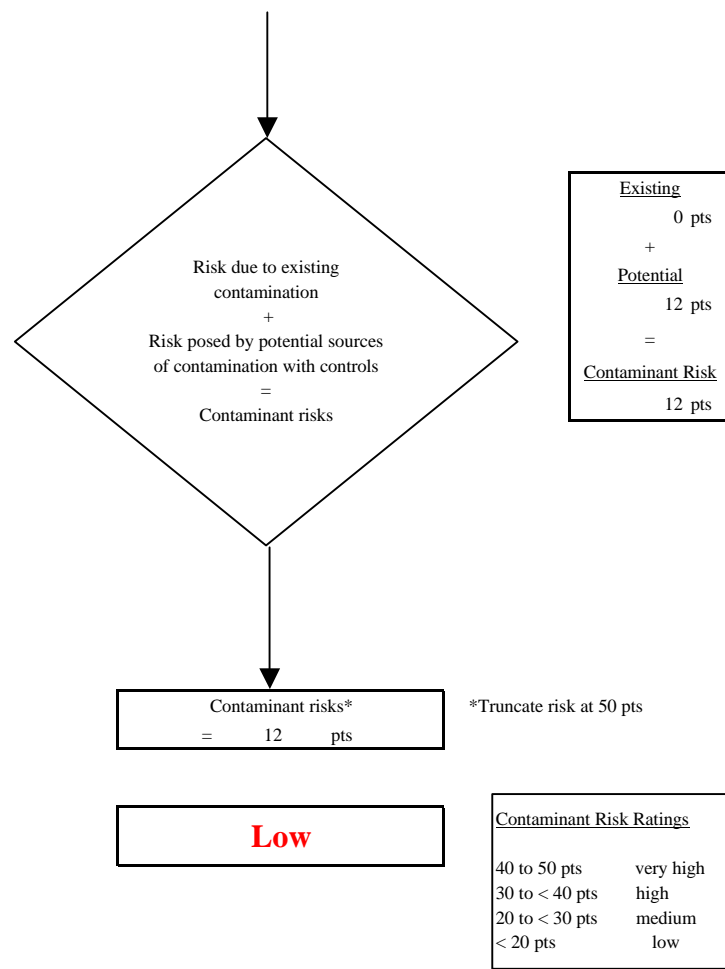


Chart 8. Vulnerability analysis for Totem Inn - Volatile Organic Chemicals

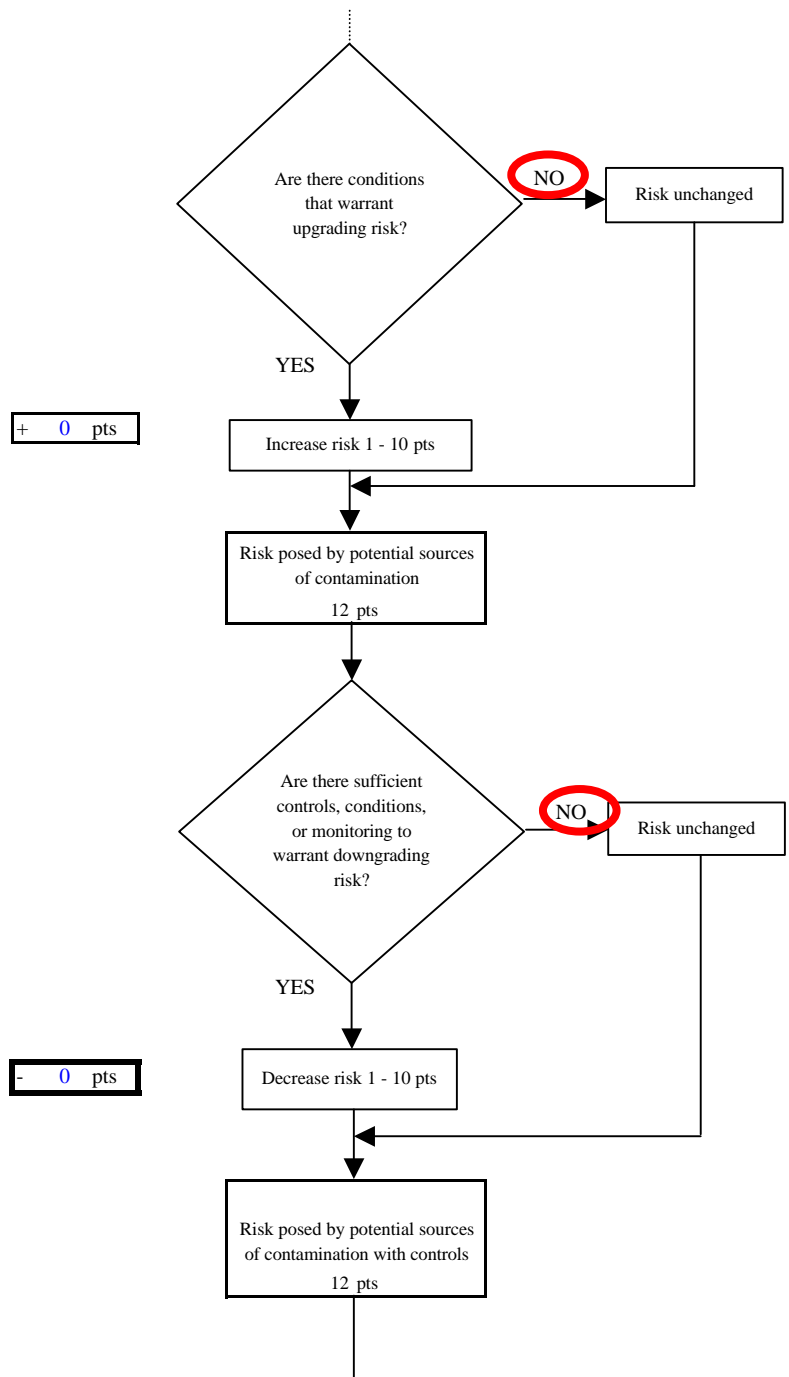