



Source Water Assessment

A Hydrogeologic Susceptibility and
Vulnerability Assessment for
Church of Jesus Christ, Latter Day Saints
Drinking Water System,
Naknek, Alaska

PWSID # 262767.001 March 2004

DRINKING WATER PROTECTION PROGRAM REPORTS 1210 Alaska Department of Environmental Conservation

Source Water Assessment for Church of Jesus Christ, Latter Day Saints Drinking Water System Naknek, Alaska

PWSID # 262767.001

DRINKING WATER PROTECTION PROGRAM REPORTS 1210

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

| CHURCH OF . SAINTS - P SYSTEM CHURCH OF . SAINTS - D | JESUS UBLIO JESUS RINKI | S CHRIST, LATTER DAY CO C DRINKING WATER RAM | ENTORY OF POTENTIAL AND EXISTING ONTAMINANT SOURCES |
|--|----------------------------------|---|---|
| | | TABLES | |
| Table 2. Susce Table 3. Conta | eptibil amina | of Zonesnt Riskslnerability | 3 |
| | | APPENDICE | S |
| APPENDIX | A. | Church of Jesus Christ, Latter Day Saints Dri | nking Water Protection Area (Map A) |
| | В. | Contaminant Source Inventory for Church of Contaminant Source Inventory and Risk Ran Saints – Bacteria and Viruses (Table 2) Contaminant Source Inventory and Risk Ran Saints – Nitrates/Nitrites (Table 3) Contaminant Source Inventory and Risk Ran Saints – Volatile Organic Chemicals (Table 4) | king for Church of Jesus Christ, Latter Day king for Church of Jesus Christ, Latter Day king for Church of Jesus Christ, Latter Day |
| | C. | Church of Jesus Christ, Latter Day Saints Dr Existing Contaminant Sources (Map C) | inking Water Protection Area and Potential and |
| | D. | Vulnerability Analysis for Contaminant Sour Church of Jesus Christ, Latter Day Saint | ce Inventory and Risk Ranking for s Public Drinking Water Source (Charts 1 – 8) |

Source Water Assessment for Church of Jesus Christ, Latter Day Saints Source of Public Drinking Water, Naknek, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The Church of Jesus Christ, Latter Day Saints has one Public Water System (PWS) well. The well (PWSID 262767.001) has been used as a drinking water well since it was drilled in 1995.

The well is a Class B (transient/non-community) water system that is located at Mile 1.9, Alaska Peninsula Highway in Naknek, Alaska. The well is located approximately 0.25 miles from the Naknek River. Available records indicate that the system serves approximately 30 nonresidents and no residents. There is no secondary storage of water, other than a 175-gallon pressure/hot water tank, and the untreated water source is derived directly from the wellhead. It is reported that the water is used for the restroom only. The wellhead received a susceptibility rating of Very High and the aquifer received a susceptibility rating of Very High. Combining these two ratings produce a Very High rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for the primary public drinking water source include: domestic wastewater collection systems, a domestic wastewater treatment plant (sewage lagoon), aboveground fuel tanks, a medical/veterinary facility, roads, and airports. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the water well received vulnerability rating of Very High for the bacteria and viruses, a vulnerability rating of Very High for nitrates and nitrites, and a vulnerability rating of Very High for volatile organic chemicals contaminant categories.

CHURCH OF JESUS CHRIST, LATTER DAY SAINTS PUBLIC DRINKING WATER SYSTEM

The Church of Jesus Christ, Latter Day Saints water well is a Class B (transient/non-community) public water system. The system consists of one well located approximately 0.25 miles from the Naknek

River in Naknek, Alaska (Sec. 2, T17S, R47W, Seward Meridian; see Map A of Appendix A).

Naknek is the primary fishery center in Bristol Bay, located about 12 miles northwest of King Salmon and 300 miles southwest of Anchorage. The community has a population of 642 (ADCED, 2003). Average annual precipitation in Naknek is 20 inches, including approximately 45 inches of snowfall. Temperatures range from 42 to 63°F in summer and -4 to 16°F in winter. Temperatures can be as extreme as -46 to 88°F.

The community of Naknek gets most of their water supply from individual wells. Most households are served by the piped sewage collection system operated by the Borough and the remaining households have individual septic tanks (ADCED, 2003). Naknek receives electrical power from the Naknek Electric Association operated by the REA Cooperative. Power generating facilities are fueled by diesel. Refuse is collected by the Patterson Sanitation Company and trucked to the Borough operated landfill located five miles outside of the community (ADCED, 2003).

According to information supplied by ADEC for the Church of Jesus Christ, Latter Day Saints PWS, the depth of the water well is 158 feet below the ground surface. Based on available construction details, the well is screened in sand, gravel and clay in a confined aquifer. Confined aquifers are less susceptible to groundwater impacts resulting from the downward migration of surface contaminants. The well is not located in a floodplain.

Information acquired from a June 2000 sanitary survey for the public water system indicated that the land surface was sloped away from the well. Generally, land surfaces that slope away from the wellhead promote surface water drainage, which reduces potential of contaminant migration down the well casing annulus. The well is grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing annulus and into source waters.

Naknek is located in an area that has been mapped as being underlain by isolated masses of permafrost; predominantly fine-grained deposits. Permafrost is usually found either at a considerable depth as relict permafrost or near the surface as thin lenses of small extent where ground insulation is high or low. The terrain in this area consists of low hills with many shallow lakes. The lakes resulted from the delayed melting of buried ice blocks (ADOT&PF, 1982).

CHURCH OF JESUS CHRIST, LATTER DAY DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts. An analytical calculation was used to determine the size and shape of the DWPA for the Church of Jesus Christ, Latter Day Saints PWS. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (Freeze and Cherry, 1979). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time-of-travel for each:

Table 1. Definition of Zones

| Zone | Definition |
|------|--|
| Α | 1/4 the distance for the 2-vr_time-of-travel |

| В | Less than the 2 year time-of-travel |
|---|--------------------------------------|
| C | Less Than the 5 year time-of-travel |
| D | Less than the 10 year time-of-travel |

The DWPA for the Church of Jesus Christ, Latter Day Saints PWS was determined using an analytical calculation and includes Zones A, B, C and D (See Map A of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Church of Jesus Christ, Latter Day Saints DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses,
- Nitrates and/or nitrites,
- Volatile organic chemicals.

The sources are displayed on Map C of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low,
- Medium,
- High, and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF THE CHURCH OF JESUS CHRIST, LATTER DAY SAINTS DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility, and
- Contaminant risks.

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0-25 Points)(Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

| Natural Susceptibility Ratings | | | | | | |
|--------------------------------|-----------|--|--|--|--|--|
| 40 to 50 pts | Very High | | | | | |
| 30 to < 40 pts | High | | | | | |
| 20 to < 30 pts | Medium | | | | | |
| < 20 pts | Low | | | | | |

The Church of Jesus Christ, Latter Day Saints water well is in a confined aquifer. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the Susceptibility scores and ratings for both wells in this PWS.

Table 2. Susceptibility

| | Score | Rating |
|------------------------|-------|-----------|
| Susceptibility of the | 20 | Very High |
| Wellhead | | |
| Susceptibility of the | 22 | Very High |
| Aquifer | | |
| Natural Susceptibility | 42 | Very High |
| | | |

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

| Contaminant Risk Ratings | | | | | | | |
|--------------------------|-----------|--|--|--|--|--|--|
| 40 to 50 pts | Very High | | | | | | |
| 30 to < 40 pts | High | | | | | | |
| 20 to < 30 pts | Medium | | | | | | |
| < 20 pts | Low | | | | | | |

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

| Category | Score | Rating |
|---------------------------|-------|-----------|
| Bacteria and Viruses | 50 | Very High |
| Nitrates and/or Nitrites | 41 | Very High |
| Volatile Organic Chemical | ls 50 | Very High |

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Natural Susceptibility
$$(0 - 50 \text{ points})$$

+

Contaminant Risks (0 - 50 points)

=

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

Again, rankings are assigned according to a point score:

| Overall Vulnerability Ratings | | | | | | | | |
|-------------------------------|-----------|--|--|--|--|--|--|--|
| 80 to 100 pts | Very High | | | | | | | |
| 60 to < 80 pts | High | | | | | | | |
| 40 to < 60 pts | Medium | | | | | | | |
| < 40 pts | Low | | | | | | | |

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

| Category | Score | Rating |
|----------------------------|-------|-----------|
| Bacteria and Viruses | 90 | Very High |
| Nitrates and Nitrites | 85 | Very High |
| Volatile Organic Chemicals | 90 | Very High |

Bacteria and Viruses

The contaminant risk for bacteria and viruses is **Very High**. The risk is primarily attributed to the presence of a domestic wastewater treatment plant (sewage lagoon) in Zone A (See Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Positive bacteria counts were reported in recent (previous five years) sampling events. Only a small amount of bacteria and viruses are required to endanger public health.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Very High**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is **Very High**. The risk to this source of public drinking water is primarily attributed to a domestic wastewater treatment plant (sewage lagoon) in Zone A (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D).

Nitrates are very mobile, moving at approximately the same rate as water. The sampling history for this well indicates that low levels of nitrates have been detected in the water. However, the reported concentrations of nitrates do not exceed the maximum contaminant level (MCL) of 10 mg/L. Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L; therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources.

Nitrate levels are often derived from the decomposition of organic matter in soils. Although the nitrate source is unknown, such occurrences may be attributed to septic systems or other sources. After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination is **Very High**.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is **Very High**. The risk is primarily attributed to the presence of airports in Zones A, B, and C (see Table 4 – Appendix B).

No recent sampling data was available in ADEC records for Church of Jesus Christ, Latter Day Saints (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Very High**.

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the Church of Jesus Christ, Latter Day Saints and the community of Naknek to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of the drinking water source.


REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2003 [WWW document]. URL: http://www.dced.state.ak.us/cbd/commdb/CF COMDB.htm
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL http://www.state.ak.us/dec/dspar/csites/cs_search.htm
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL http://www.dec.state.ak.us/spar/stp/ust/search/fac_search.asp
- Alaska Department of Transportation and Public Facilities (ADOT&PF), 1982, Engineering Geology and Soils Report, North Naknek Materials Investigation.
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Drinking Water Protection Area Location Map (Map A)

Public Water Well System for PWS #262767.001 Church of Jesus Christ, Latter Day Saints - Naknek

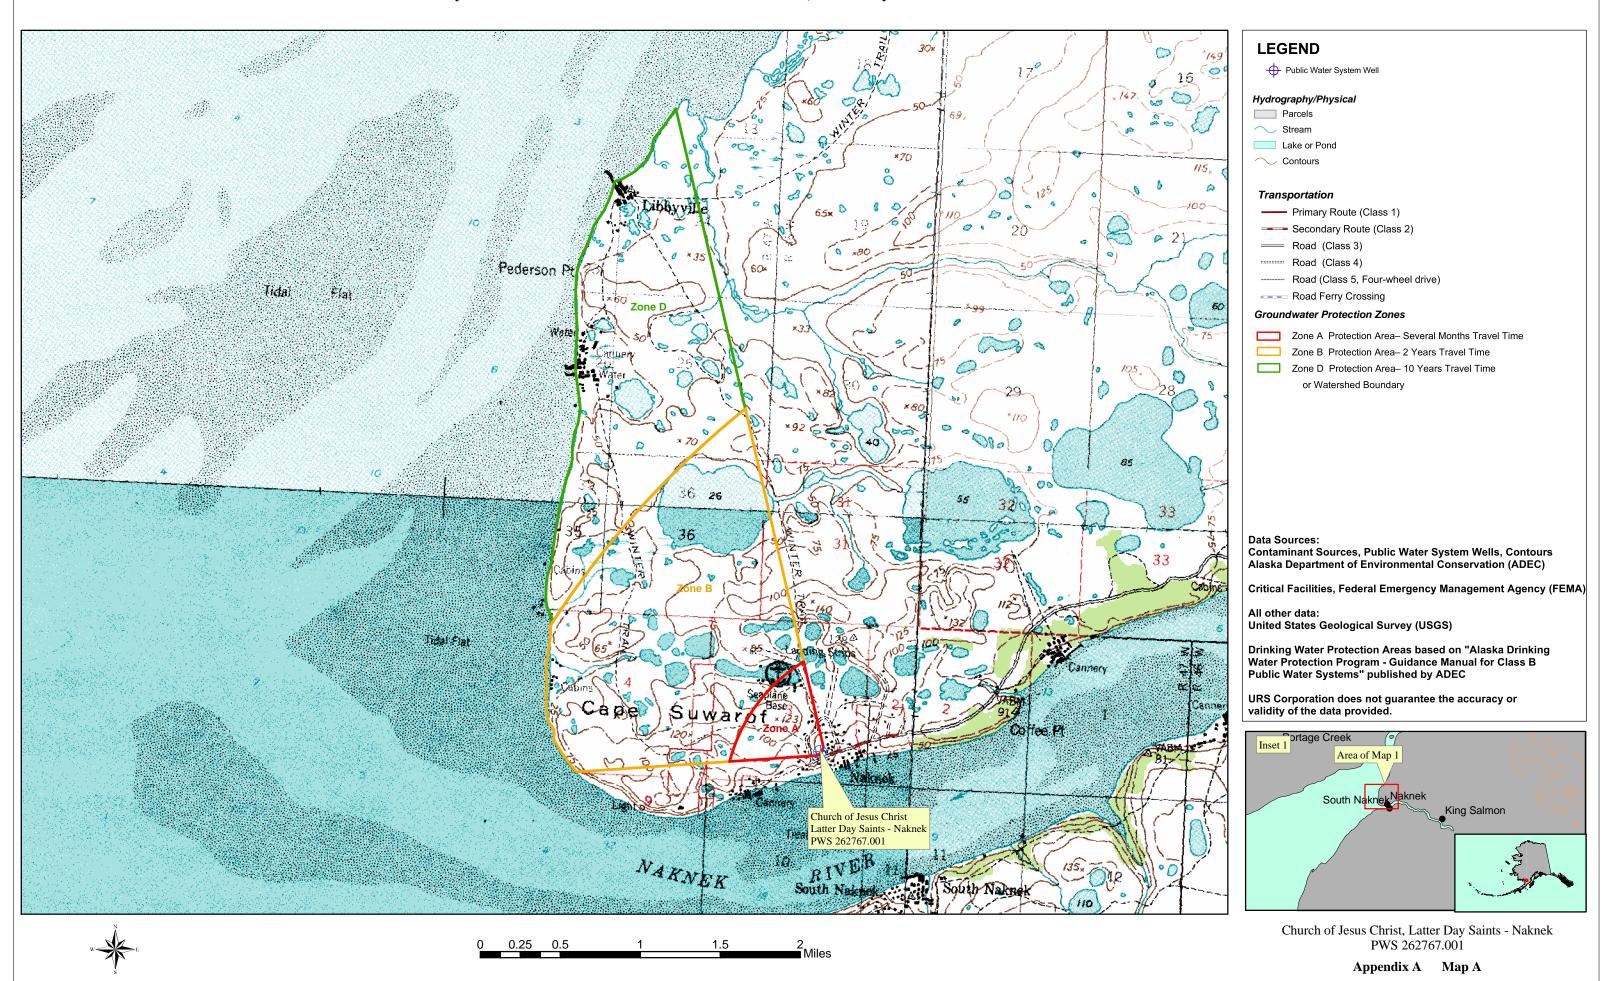

APPENDIX B

Contaminant Source Inventory and Risk Rankings (Tables 1-4)

Contaminant Source Inventory for LDS Church - Naknek

| Contaminant Source Type | Contaminant Source ID | CS ID tag | Zone | Map Number | Comments |
|--|--------------------------|-----------|------|------------|---|
| Domestic wastewater collection systems (sewer lines or lift stati- | D01 | D01-01 | A | С | |
| Domestic wastewater treatment plant disposal ponds/lagoons | D02 | D02-01 | A | C | Sewage Lagoon |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-01 | A | С | Above ground heating fuel tank for facility |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-01 | A | С | Hospital/Clinic/ER |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-02 | A | С | Church |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-03 | A | С | Community Hall |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-04 | A | С | Senior Center |
| Airports | X14 | X14-01 | A | C | Airport |
| Highways and roads, dirt/gravel | X24 | X24-01 | A | С | Assumed that 1 to 20 roads exist in Zone A |
| Medical/veterinary facilities (doctor or dentist offices, hospitals nursing homes) | X40 | X40-01 | A | С | Hospital/Clinic/ER |
| Airports | X14 | X14-02 | В | C | Airport |
| Airports | X14 | X14-03 | С | С | Airport |

Contaminant Source Inventory and Risk Ranking for LDS Church - Naknek Sources of Bacteria and Viruses

| Contaminant Source Type | Contaminant Source ID | CS ID tag | Zone | Risk Ranking for Analysis | Map Number | Comments |
|---|--------------------------|-----------|------|------------------------------|---------------|--|
| Domestic wastewater collection systems (sewer line or lift stations) | D01 | D01-01 | A | Medium | С | |
| Domestic wastewater treatment plant disposal ponds/lagoons | D02 | D02-01 | A | High | С | Sewage Lagoon |
| Highways and roads, dirt/gravel | X24 | X24-01 | A | Low | С | Assumed that 1 to 20 roads exist in Zone A |
| Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes) | X40 | X40-01 | A | Medium | C | Hospital/Clinic/ER |

Contaminant Source Inventory and Risk Ranking for LDS Church - Naknek Sources of Nitrates/Nitrites

| Contaminant Source ID | CS ID tag | Zone | Risk Ranking for Analysis | Map Number | Comments |
|--------------------------|---|---|--|---|--|
| D01 | D01-01 | A | Medium | С | |
| D02 | D02-01 | A | High | С | Sewage Lagoon |
| X14 | X14-01 | A | Low | С | Airport |
| X24 | X24-01 | A | Low | С | Assumed that 1 to 20 roads exist in Zone A |
| X40 | X40-01 | A | Low | С | Hospital/Clinic/ER |
| X14 | X14-02 | В | Low | C | Airport |
| X14 | X14-03 | С | Low | С | Airport |
| | Source ID D01 D02 X14 X24 X40 X14 | Source ID CS ID tag D01 D01-01 D02 D02-01 X14 X14-01 X24 X24-01 X40 X40-01 X14 X14-02 | Source ID CS ID tag Zone D01 D01-01 A D02 D02-01 A X14 X14-01 A X24 X24-01 A X40 X40-01 A X14 X14-02 B | Source ID CS ID tag Zone for Analysis D01 D01-01 A Medium D02 D02-01 A High X14 X14-01 A Low X24 X24-01 A Low X40 X40-01 A Low X14 X14-02 B Low | Source ID CS ID tag Zone for Analysis Number D01 D01-01 A Medium C D02 D02-01 A High C X14 X14-01 A Low C X24 X24-01 A Low C X40 X40-01 A Low C X14 X14-02 B Low C |


Contaminant Source Inventory and Risk Ranking for LDS Church - Naknek Sources of Volatile Organic Chemicals

| Contaminant Source Type | Contaminant Source ID | CS ID tag | Zone | Risk Ranking for Analysis | Map Number | Comments |
|---|--------------------------|-----------|------|------------------------------|---------------|---|
| Domestic wastewater collection systems (sewer line or lift stations) | D01 | D01-01 | A | Low | С | |
| Domestic wastewater treatment plant disposal ponds/lagoons | D02 | D02-01 | A | Low | С | Sewage Lagoon |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-01 | A | Low | С | Hospital/Clinic/ER |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-01 | A | Low | С | Above ground heating fuel tank for facility |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-02 | A | Low | С | Church |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-03 | A | Low | С | Community Hall |
| Tanks, heating oil, nonresidential (aboveground) | T14 | T14-04 | A | Low | С | Senior Center |
| Airports | X14 | X14-01 | A | High | С | Airport |
| Highways and roads, dirt/gravel | X24 | X24-01 | A | Low | С | Assumed that 1 to 20 roads exist in Zone A |
| Medical/veterinary facilities (doctor or dentist offices, hospitals, nursing homes) | X40 | X40-01 | A | Low | С | Hospital/Clinic/ER |
| Airports | X14 | X14-02 | В | High | С | Airport |
| Airports | X14 | X14-03 | С | High | С | Airport |
| | | | | | | |

APPENDIX C

Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

Public Water Well System for PWS #262767.001 Church of Jesus Christ, Latter Day Saints - Naknek Showing Potential and Existing Sources of Contamination

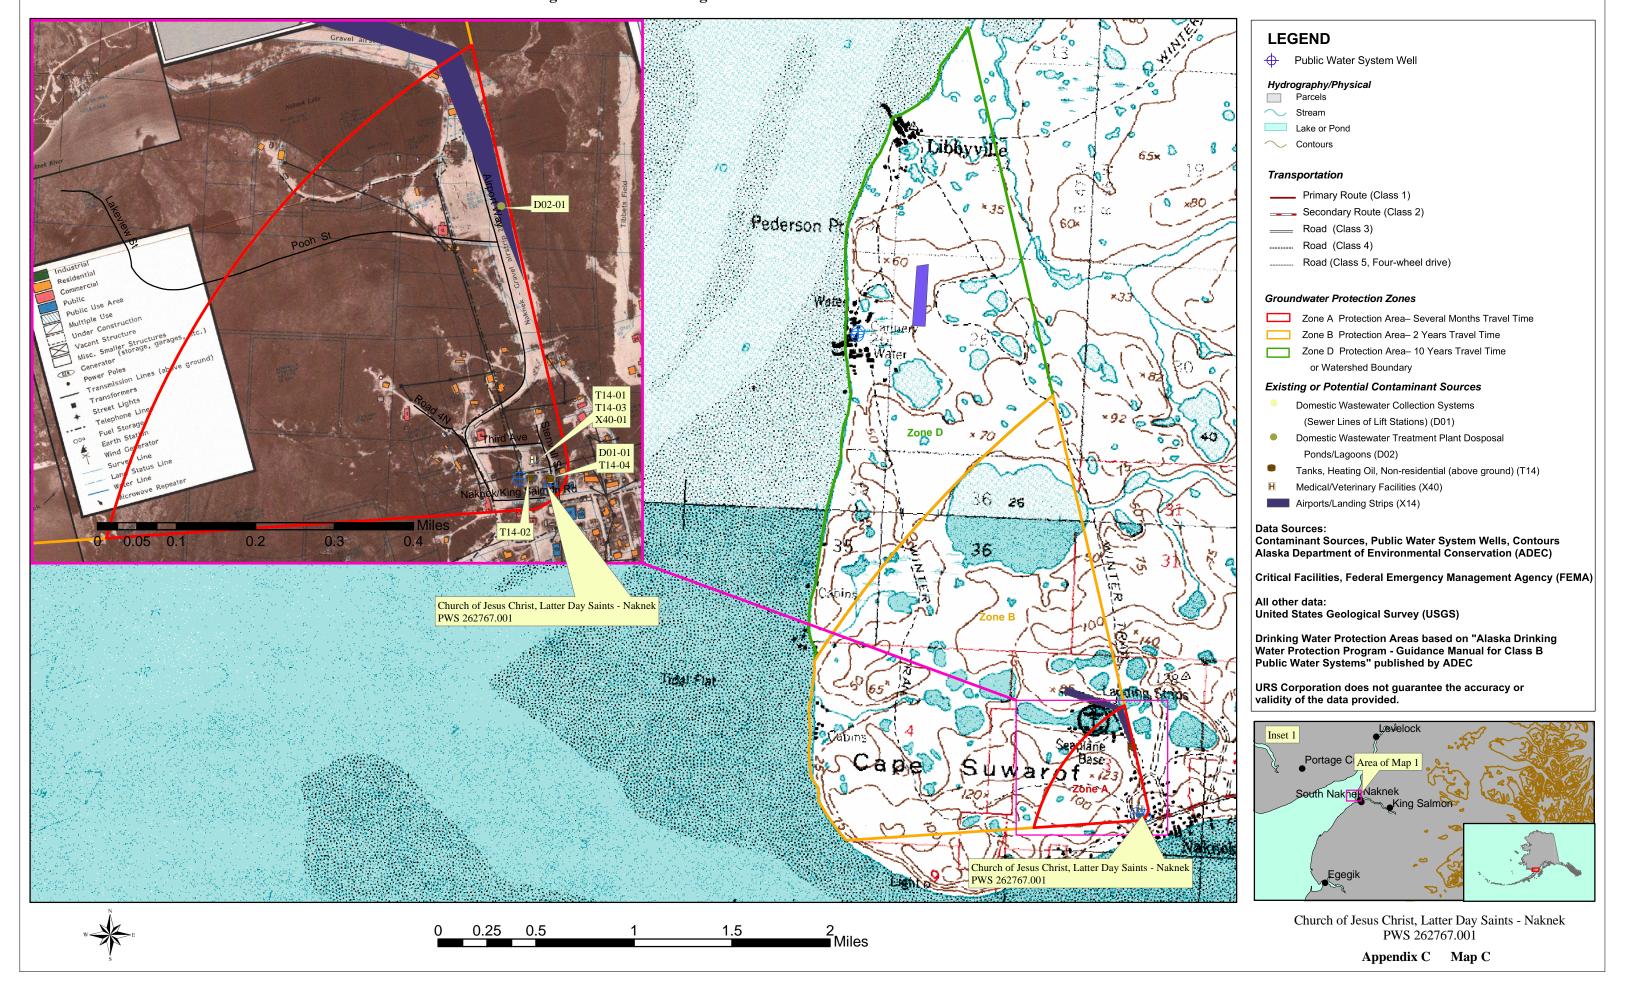

APPENDIX D

Vulnerability Analysis for Public Drinking Water Source (Charts 1-8)

Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 pts NO Is the well Increase susceptibility 5 pts properly + 0 pts NO grouted? Is the well Increase susceptibility 20 pts + 20 pts capped? YES YES Very High Susceptibility of wellhead 20 pts YES Increase susceptibility: Is the well 10 pts: suspected floodplain + 0 pts within a Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts high 10 to < 15 pts medium NO < 10 pts low Is the land surface sloped Increase susceptibility 5 pts + 0 pts away from the

Chart 1. Susceptibility of the wellhead - Church of Jesus Christ LDS - Naknek (PWS No. 262767.001)

Chart 2. Susceptibility of the aquifer Church of Jesus Christ LDS - Naknek (PWS No. 262767.001)

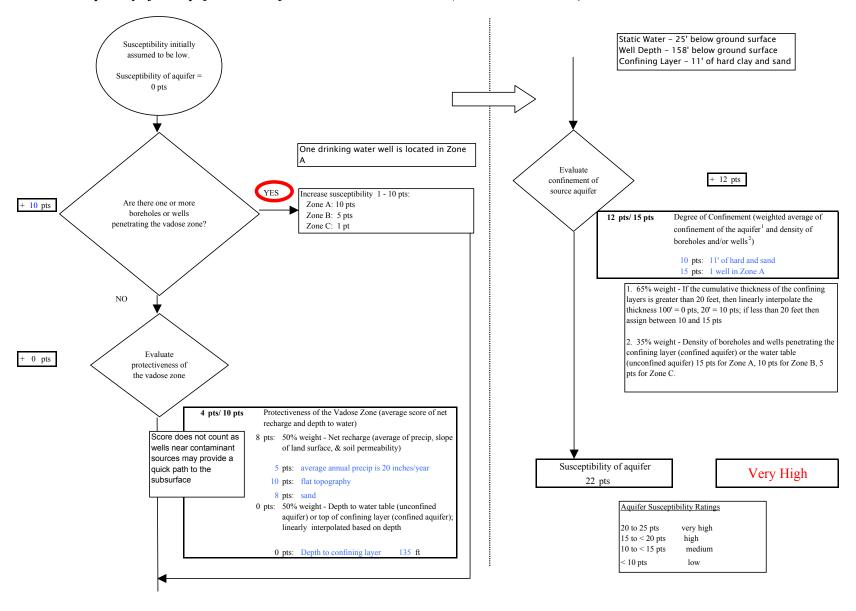


Chart 3. Contaminant risks for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Bacteria & Viruses

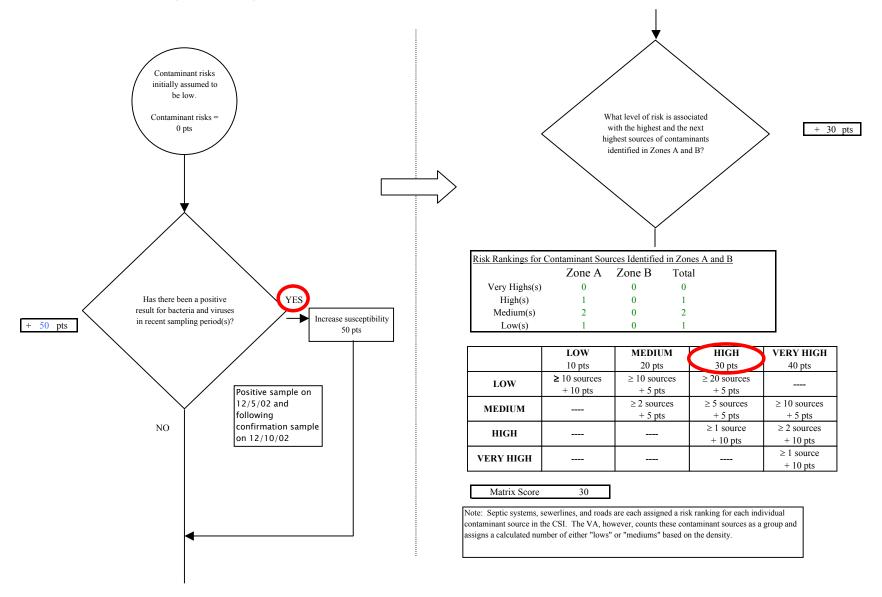


Chart 3. Contaminant risks for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Bacteria & Viruses Are there sufficient Initial assessment of risk posed by Risk unchanged controls, conditions, or potential sources of contamination monitoring to warrant = 30 pts downgrading risk? Are any YES significant Risk unchanged contaminant Reduce risk 1 - 10 pts sources within - 0 pts Zone A? The number and magnitude of Risk posed by potential sources of contaminant sources YES contamination with controls in Zone A determines a risk + 10 pts Increase risk 1 - 10 pts increase. See Table 2 for inventory. Existing Risk due to existing 50 pts contamination Are there any conditions that Risk unchanged Risk posed by potential sources warrant upgrading Potential of contamination with controls risk? 40 pts Contaminant risks Contaminant Risk YES 90 pts Increase risk 1 - 10 pts + 0 pts Contaminant risks* * Truncate risk at 50 pts Contaminant Risk Ratings Risk posed by potential sources of contamination 40 to 50 pts very high 40 30 to < 40 pts high Very High $20 \text{ to} \le 30 \text{ pts}$

Page 4 of 13


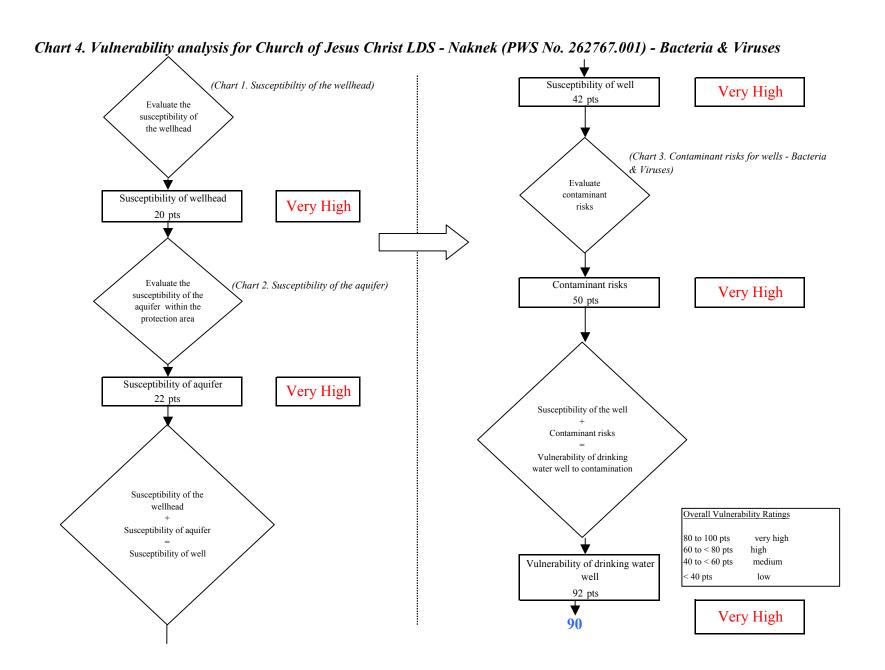


Chart 5. Contaminant risks for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Evaluate the level of Current level of Contaminant risks background contamination due to man-= 0 pts contamination from made source(s) natural sources 0 pts Is the concentration of Has nitrates and/or the contaminant nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 6/11/2003 6/18/2002 ND The nitrate concentration 6/19/2001 ND is assumed to be natural if 2/3/1999 0.18 less than 2 mg/L (20%) Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Level (MCL) = 10 mg/LDetected Nitrate Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect sources made sources [MCL = 50 pts; detect = 0 pts]1 pts Risk due to existing contamination 1 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources

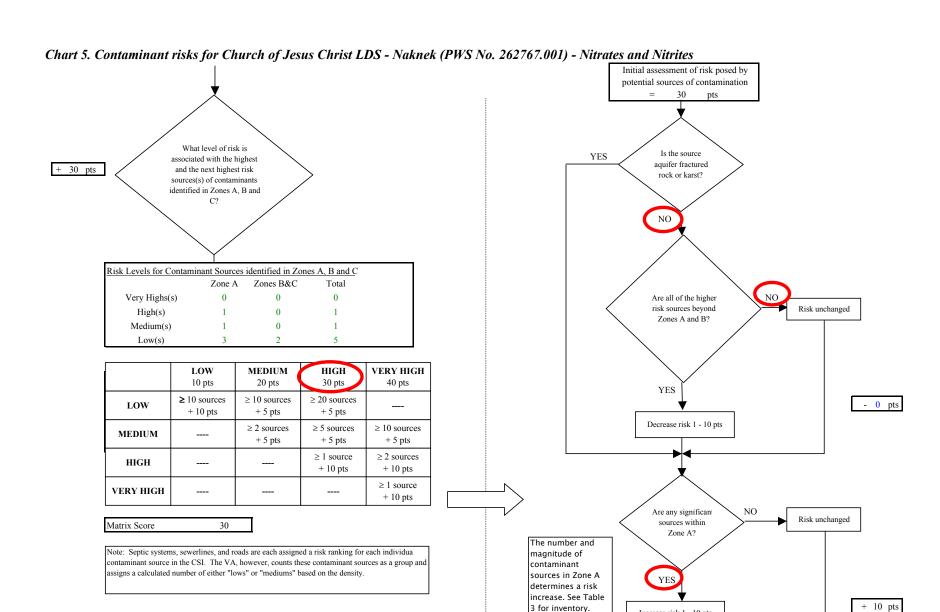

Increase risk 1 - 10 pts


Chart 5. Contaminant risks for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Nitrates and Nitrites Existing NO Are there conditions 1 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 40 pts Risk posed by potential sources of contamination with controls Contaminant Risk YES 41 pts Contaminant risks 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 40 pts *Truncate risk at 50 pts Contaminant risks* 41 Are there sufficient Contaminant Risk Ratings Very High controls, conditions, NO. Risk unchanged or monitoring to 40 to 50 pts very high 30 to < 40 pts warrant downgrading high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls


Page 8 of 13

Chart 6. Vulnerability analysis for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Nitrates and Nitrites (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Very High 42 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate Susceptibility of wellhead contaminant risks Very High 20 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 41 pts aquifer within the protection area Susceptibility of aquifer Very High 22 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 83 pts Very High **85**

Chart 7. Contaminant risks for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Volatile Organic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources 0 pts NO or Is the concentration of Have volatile organic UNKNOWN the contaminant chemicals been detected increasing, decreasing, in the source waters in or staying the same? recent sampling period(s)? Recent VOC Sampling Results (mg/L) No recent VOC sampling data was available in ADEC records for this Increasing: risk up 1 - 10 pts PWSID YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Level (MCL) = ?? mg/LDetected ???? Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect sources made sources [MCL = 50 pts; detect = 0 pts]0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources YES

Page 10 of 13



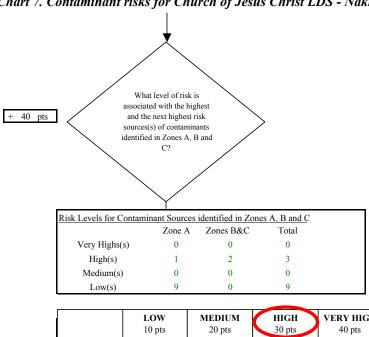

| | LOW 10 pts | MEDIUM 20 pts | HIGH 30 pts | VERY HIGH 40 pts |
|-----------|--------------------------|-------------------------|-------------------------|-------------------------|
| LOW | ≥ 10 sources + 10 pts | ≥ 10 sources + 5 pts | ≥ 20 sources + 5 pts | |
| MEDIUM | | ≥ 2 sources + 5 pts | ≥ 5 sources + 5 pts | ≥ 10 sources + 5 pts |
| HIGH | | | ≥ 1 source + 10 pts | ≥ 2 sources + 10 pts |
| VERY HIGH | | | | ≥ 1 source + 10 pts |

Matrix Score 40

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individua contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

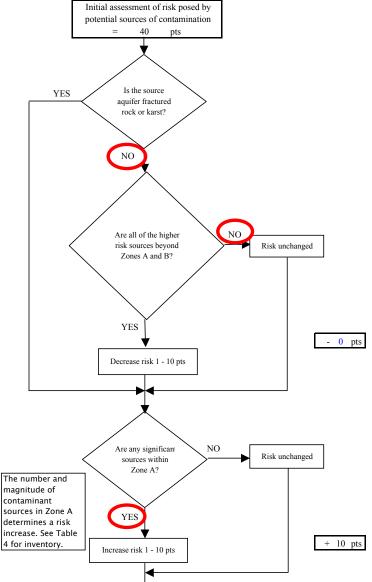


Chart 7. Contaminant risks for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Volatile Organic Chemicals Existing NO Are there conditions 0 pts Risk unchanged that warrant upgrading risk? Risk due to existing Potential contamination 50 pts Risk posed by potential sources of contamination with controls Contaminant Risk YES 50 pts Contaminant risks 0 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 50 pts *Truncate risk at 50 pts Contaminant risks* 50 Are there sufficient Contaminant Risk Ratings Very High controls, conditions, NO Risk unchanged or monitoring to 40 to 50 pts very high warrant downgrading 30 to < 40 pts high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls

Page 12 of 13

Chart 8. Vulnerability analysis for Church of Jesus Christ LDS - Naknek (PWS No. 262767.001) - Volatile Organic Chemicals (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Very High 42 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate contaminant Susceptibility of wellhead Very High risks 20 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Very High 22 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well Vulnerability of drinking water 40 to < 60 ptsmedium well < 40 pts low 92 pts

Page 13 of 13

90

Very High