



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability Assessment for Morgans Landing Drinking Water System, Sterling, Alaska Morgans Landing PWSID # 248226.001

June 24, 2003

DRINKING WATER PROTECTION PROGRAM REPORT 560
Alaska Department of Environmental Conservation

Source Water Assessment for Morgans Landing Drinking Water System Sterling, Alaska Morgans Landing PWSID# 248226.001

DRINKING WATER PROTECTION PROGRAM REPORT 560

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

EXECUTIVE S	UMMARY	1 INVENTORY OF POTENTIAL AND EXISTING			
MORGANS LA	NDING PUBLIC DRINKING	CONTAMINANT SOURCES2			
WATER SYS	TEM	1 RANKING OF CONTAMINANT RISKS3			
MORGANS LA	NDING DRINKING WATER	VULNERABILITY OF MORGANS LANDING			
PROTECTIO	N AREA	2 DRINKING WATER SYSTEM3			
	Т	TABLES			
		2			
		3			
		4			
Table 4. Overa	ll Vulnerability	4			
	API	PENDICES			
APPENDIX	A. Morgans Landing Drinking W	ater Protection Area (Map 1)			
		· · · · · · · · · · · · · · · · · · ·			
	B. Contaminant Source Inventory				
	•	and Risk Ranking for Morgans Landing –			
	Bacteria and Viruses (Tab	,			
		and Risk Ranking for Morgans Landing –			
	Nitrates/Nitrites (Table 3)				
	Volatile Organic Chemic	and Risk Ranking for Morgans Landing –			
	volutile Organic Chemica	ans (Tuble 1)			
	C. Morgans Landing Drinking W	ater Protection Area and Potential			
	and Existing Contaminant	t Sources (Map 1)			
D. Vulnerability Analysis for Contaminant Source Inventory and Risk Ranking for					
	Morgans Landing Public I	Drinking Water Source (Charts 1 – 8)			

Source Water Assessment for Morgans Landing Source of Public Drinking Water, Sterling, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The public water system for the Morgans Landing is a Class B (transient/non-community) water system consisting of one well. Morgans Landing is located near the community of Sterling, Alaska, at milepost 85 of the Sterling Highway. The wellhead received a susceptibility rating of Very High and the aquifer received a susceptibility rating of **Medium**. Combining these two ratings produces a **High** rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for the Morgans Landing public drinking water source include: pit toilets, RV dump stations, campgrounds and RV parks, large capacity and residential septic systems, and highways and roads. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water source for the Morgans Landing received a vulnerability rating of **High** for the bacteria and viruses, a vulnerability rating of **High** for nitrates and nitrites, and a vulnerability rating of **Medium** for volatile organic chemicals contaminant categories.

MORGANS LANDING PUBLIC DRINKING WATER SYSTEM

The Morgans Landing public water system (PWS) is a Class B (transient/non-community) water system. The system consists of one well located near the community of Sterling, Alaska, at milepost 85 of the Sterling Highway (T05N, R09W, Section 28) (See Map 1 of Appendix A). Sterling is part of the Kenai Peninsula Borough, which is located directly south of the city of Anchorage (Please see the inset of Map 1 in Appendix A for location). The borough encompasses 25,600 square miles, of which only 15,700 square miles is land.

The Kenai Peninsula is broken into two distinct geographic areas; the Kenai Mountains and the Kenai Lowlands. Sterling and its surrounding communities are located in the Kenai Lowlands. Communities located within the Kenai Lowlands include Soldotna, Kenai, Nikiski, Clam Gulch, Ninilchik, and Homer.

The Kenai Peninsula area topography varies from about 3,000 feet to 5,000 feet above sea level in the Kenai Mountains, the highest point being about 6,400 feet above sea level. The Kenai Peninsula is dotted with many lakes and small streams, including three large lakes (Kenai Lake, Skilak Lake, and Tustemena Lake) and two substantial rivers (Kenai River, and Kasilof River) (USGS 1915).

The Morgans Landing water system is located within the Kenai Lowlands, which is a sub-province of the Cook Inlet-Susitna Lowland physiographic region. The Kenai Lowland is a glaciated coastal shelf situated west of the northeast-trending Kenai Mountains. Approximately 100 miles long, the coastal shelf is bordered on the west by Cook Inlet, on the east by Kenai Mountains, on the north by Turnagain Arm, and on the south by the Caribou Hills and Kachemak Bay. The following summary of regional geology and hydrogeology is based on studies by Bailey and Hogan (1995); Freethey and Scully (1980); Glass (1996); Hartman, et al. (1972); and Karlstrom (1964).

The Kenai Lowland is underlain by bedrock. Tertiary sedimentary bedrock is more than 500 feet below the city of Kenai airport, but is exposed along beach cliffs and road cuts near the southwest end of the lowland. Unconsolidated surficial deposits of Quaternary age include coastal deposits, glaciolacustrine deposits, glaciofluvial deposits, glacial moraine deposits, and periglacial wind deposits. Unconsolidated Quaternary cover on the lowlands generally thickens from south to North being thin or absent in the Homer area, and over 750 feet thick near Nikiski.

The most significant groundwater resources of the Kenai Lowlands are contained in Quarternary coarse-grained sands and gravels. Flood plain, river terrace and other alluvial deposits are common aquifer materials in the area, and are characterized by high rates of recharge, and large saturated thicknesses. Other favorable materials include proglacial lake and associated river deposits and glacial outwash deposits consisting of meltwater sorted sand and gravel

material. Unsorted glacial moraine and drift deposits generally have poor groundwater yields, as do discontinuous layers of confining clays and silt that are common throughout the unconsolidated materials. The relatively thicker sequence of unconsolidated sediments in the northern portions of the Kenai Lowlands locally hosts thicker, more extensive clay aquitards and multiple aquifers.

The Kenai Peninsula area has a central water system, however, many homes and businesses in the area rely on individual wells for their water supply. Most of these wells are deep with depths between 50 and 200 feet. Static water levels in many of these wells are between 10 and 30 feet below the surface. Although groundwater quality can vary significantly in short distance, groundwater supplies are abundant in the area.

According to information supplied by ADEC for the Morgans Landing PWS, the depth of the well is 80 feet below ground surface (bgs). The static water level is approximately 56 feet bgs. Available records indicate that the well is not screened and is located in a floodplain.

The Sanitary Survey (08/02/99) for the water system indicated that the land surface is sloped away from the well providing adequate surface water drainage. The well is grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling down the annulus along the well casing and into source waters.

This system operates year round and serves up to 50 non-residents through one service connection.

MORGANS LANDING DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts.

An analytical calculation was used to determine the size and shape of the DWPA for Morgans Landing. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (*Freeze and Cherry 1979*). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time -of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¹ / ₄ the distance for the 2-yr. time -of-travel
В	Less than the 2 year time-of-travel
C	Less Than the 5 year time -of-travel
D	Less than the 10 year time -of-travel

The DWPA for Morgans Landing was determined using an analytical calculation and includes Zone A, B, C, and D (See Map 1 of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Morgans Landing DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites:
- Volatile organic chemicals

The sources are displayed on Map 1 of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

Low;Medium;High; andVery High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF MORGANS LANDING DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The

'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well) (0 – 50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings								
40 to 50 pts	Very High							
30 to < 40 pts	High							
20 to < 30 pts	Medium							
< 20 pts	Low							

The well for Morgans Landing is completed in a confined aquifer setting. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the Susceptibility scores and ratings for the Morgans Landing.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the	20	Very High
Wellhead Susceptibility of the	12	Medium
Aquifer	12	Medium
Natural Susceptibility	32	High

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings							
40 to 50 pts	Very High						
30 to < 40 pts	High						
20 to < 30 pts	Medium						
< 20 pts	Low						

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	32	High
Nitrates and/or Nitrites	42	Very High
Volatile Organic Chemica	ls 14	Low

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Natural Susceptibility (0 – 50 points)

_

Contaminant Risks (0 – 50 points)

=

 $\label{eq:Vulnerability} Vulnerability \ of the \\ Drinking \ Water \ Source \ to \ Contamination \ (0-100).$

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings								
80 to 100 pts	Very High							
60 to < 80 pts	High							
40 to < 60 pts	Medium							
< 40 pts	Low							

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	65	High
Nitrates and Nitrites	75	High
Volatile Organic Chemicals	45	Medium

Bacteria and Viruses

The contaminant risk for bacteria and viruses is High. The risk is primarily attributed to the presence of one large capacity septic system located in Zone B (See Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Only a small amount of bacteria and viruses are required to endanger public health. Bacteria and viruses have not been detected during recent water sampling of the system at the Morgans Landing. After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is Very High. The high risk to this source of public drinking water is primarily attributed to the presence of one large-capacity septic system located in Zone B, and one large capacity septic system located in Zone C (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). Nitrates are very mobile, moving at approximately the same rate as water.

Historical sample records for the Morgans Landing PWS indicate that no detectable nitrate concentrations have been reported since 1996. In 1996, the readings were 1.0 milligram per liter (mg/L). Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L; therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources. The Maximum Contaminant Level (MCL) for nitrates and nitrites is 10 mg/L. The MCL is the maximum level of contaminant that is allowed to exist in drinking water and still be consumed by humans without harmful health effects.

Nitrate levels are often derived from the decomposition of organic matter in soils. Although the nitrate source is unknown, such occurrences may be attributed to septic systems or other sources. After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination is **High**.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is Low. The Low risk is attributed to the absence of identified high risk contaminant sources within the DWPA (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

The drinking water at Morgans Landing has not been sampled for volatile organic chemicals. After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Medium**.

REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2002 [WWW document]. URL http://www.dced.state.ak.us/mra/CF_BLOCK.cfm.
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL http://www.state.ak.us/dec/dspar/csites/cs_search.htm
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL http://www.dec.state.ak.us/spar/stp/ust/search/fac_search.asp
- Bailey, B.J., and Hogan, E.V., 1995Overview of environmental and hydrogeologic conditions near Kenai, Alaska. U.S. Geological Survey Open-File Report 95-410, 18 p.
- Freethey, G.W., and Scully, D.R. 1980 Water Resources of the Cook Inlet Basin, Alaska. U.S. Geological Survey Hydrologic Investigation Atlas HA-620, prepared in cooperation with Alaska Water Study Committee, State of Alaska Department of Natural Resources, and Division of Geological and Geophysical Surveys.
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- Glass, Roy, L. 1996 Groundwater Conditions and Quality in the Western Part of the Kenai Peninsula, Southcentral Alaska. U.S. Geological Survey Open File Report 94-466, prepared in cooperation with the Alaska Department of Natural Resources, Kenai Peninsula Borough, and Kenai Soil and Water Conservation District.
- Hartman, D.C., Pessel, G.H., and McGee, D.I., 1972 Kenai Group of Cook Inlet Basin, Alaska: State of Alaska. Open File Report #49, Department of Natural Resources Division of Geological and Geophysical Surveys, 5p.
- Karlstrom, T.N.V. 1964 Quaternary geology of the Kenai Lowland and glacial history of the Cook Inlet region, Alaska. U.S. Geological Survey Professional Paper 443, 64 p.
- Kenai River Watershed, 2002 [WWW document]. URL http://www.kenai-watershed.org/spawning/kenai-river/kenai-river.html.
- Martin, G.C., Johnson, B.L., and Grant, 1915, Geology and mineral resources of Kenai Peninsula, Alaska: US Geological Survey Bulletin 587, 243 p., maps.
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Morgans Landing Drinking Water Protection Area Location Map (Map 1)

Drinking Water Protection Areas for the Public Water Well System for PWS #248226.001 Div. of Parks Morgans Landing **LEGEND** EAGLESON AV Public Water System Well **Groundwater Protection Zones** Zone A – Several Months Travel Time Zone B – Less Than 2 Years Travel Time MONTGOMERY AV Zone C – Less Than 5 Years Travel Time Zone D – Less Than 10 Years Travel Time Zone D Hydrography/Physical Parcels HIGH POINT AV Lake or Pond Contours (50 ft.) EAGLE AV **Transportation** ----- Roads FORSTNERAVE CEDARWOOD AV WOODFIN AV Data Sources: Contaminant Sources, Public Water System Wells, Contours Alaska Department of Environmental Conservation (ADEC) Parcels Kenai Peninsula Borough All other data United States Geological Survey (USGS) Drinking Water Protection Areas based on ADEC Calculation Spreadsheet. URS Corporation does not guarantee the accuracy or validity of the data provided. FUNNY RIVER RD Inset 1 Area of Map 1 Div. of Parks Morgans Landing PWS 248226.001 HUCKABAY RD Div. of Parks Morgans Landing PWS 248226.001

15,000

20,000

2,500

5,000

10,000

Appendix A Map 1

APPENDIX B

Contaminant Source Inventory and Risk Ranking for Morgans Landing (Tables 1-4)

Contaminant Source Inventory for Morgans Landing

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-01	A	1	
RV dump stations	D18	D18-01	A	1	
Highways and roads, paved (cement or asphalt)	X20	X20-01	A	1	1 highway/road located in Zone A
Campgrounds and RV Parks	X35	X35-01	A	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	В	1	
Residential Areas	R01	R01-01	В	1	35.16 acres of residential area located in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	1	14 single family septic systems located in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-02	В	1	8 highways and roads located in Zone B
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-02	С	1	
Residential Areas	R01	R01-02	С	1	110.96 acres of residential area located in Zone C
Septic systems (serves one single-family home)	R02	R02-02	С	1	46 single family septic systems located in Zone C
Highways and roads, paved (cement or asphalt)	X20	X20-03	С	1	21 highways and roads located in Zone C
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-01	D	1	
Residential Areas	R01	R01-03	D	1	287.71 acres of residential area located in Zone D
Septic systems (serves one single-family home)	R02	R02-03	D	1	46 single family septic systems located in Zone D
Highways and roads, paved (cement or asphalt)	X20	X20-04	D	1	5 highways and roads located in Zone D

Contaminant Source Inventory and Risk Ranking for Div Parks Izaak Walton SRA Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-01	A	Low	1	
RV dump stations	D18	D18-01	A	Low	1	
Highways and roads, paved (cement or asphalt)	X20	X20-01	A	Low	1	1 Highway/paved road in Zone A
Campgrounds and RV Parks	X35	X35-01	A	Low	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	В	High	1	
Residential Areas	R01	R01-01	В	Low	1	0.36 acres of residential area in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	Low	1	2 single-family septic systems in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-02	В	Low	1	3 Highways/paved roads in Zone B
Residential Areas	R01	R01-02	С	Low	1	36.61 acres of residential area in Zone C
Septic systems (serves one single-family home)	R02	R02-02	С	Low	1	6 single-family septic systems in Zone C
Highways and roads, paved (cement or asphalt)	X20	X20-03	С	Low	1	7 Highways/paved roads in Zone C
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-02	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-03	D	High	1	
Residential Areas	R01	R01-03	D	Low	1	66.08 acres of residential area in Zone D
Septic systems (serves one single-family home)	R02	R02-03	D	Low	1	4 single-family septic systems in Zone D
Highways and roads, paved (cement or asphalt)	X20	X20-04	D	Low	1	2 Highways/paved roads in Zone D

Contaminant Source Inventory and Risk Ranking for Div Parks Izaak Walton SRA Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-01	A	Low	1	
RV dump stations	D18	D18-01	A	Low	1	
Highways and roads, paved (cement or asphalt)	X20	X20-01	A	Low	1	1 Highway/paved road in Zone A
Campgrounds and RV Parks	X35	X35-01	A	Low	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	В	High	1	
Residential Areas	R01	R01-01	В	Low	1	0.36 acres of residential area in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	Low	1	2 single-family septic systems in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-02	В	Low	1	3 Highways/paved roads in Zone B
Residential Areas	R01	R01-02	С	Low	1	36.61 acres of residential area in Zone C
Septic systems (serves one single-family home)	R02	R02-02	С	Low	1	6 single-family septic systems in Zone C
Highways and roads, paved (cement or asphalt)	X20	X20-03	С	Low	1	7 Highways/paved roads in Zone C
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-02	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-03	D	High	1	
Residential Areas	R01	R01-03	D	Low	1	66.08 acres of residential area in Zone D
Septic systems (serves one single-family home)	R02	R02-03	D	Low	1	4 single-family septic systems in Zone D
Highways and roads, paved (cement or asphalt)	X20	X20-04	D	Low	1	2 Highways/paved roads in Zone D


Contaminant Source Inventory and Risk Ranking for Div Parks Izaak Walton SRA Sources of Volatile Organic Chemicals

Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
D18	D18-01	A	Low	1	
X20	X20-01	A	Low	1	1 Highway/paved road in Zone A
X35	X35-01	A	Low	1	
D10	D10-01	В	Low	1	
R01	R01-01	В	Low	1	0.36 acres of residential area in Zone B
R02	R02-01	В	Low	1	2 single-family septic systems in Zone B
X20	X20-02	В	Low	1	3 Highways/paved roads in Zone B
R01	R01-02	С	Low	1	36.61 acres of residential area in Zone C
R02	R02-02	С	Low	1	6 single-family septic systems in Zone C
X20	X20-03	С	Low	1	7 Highways/paved roads in Zone C
D10	D10-02	D	Low	1	
D10	D10-03	D	Low	1	
R01	R01-03	D	Low	1	66.08 acres of residential area in Zone D
R02	R02-03	D	Low	1	4 single-family septic systems in Zone D
X20	X20-04	D	Low	1	2 Highways/paved roads in Zone D
	Source ID D18 X20 X35 D10 R01 R02 X20 R01 R02 X20 D10 D10 R01 R01 R02 R01 R02 R01 R02 R01 R02 R01 R02 R01 R02 R02 R01 R02 R02 R01 R02 R02 R02 R03 R04 R05 R05	Source ID CS ID tag D18 D18-01 X20 X20-01 X35 X35-01 D10 D10-01 R01 R01-01 R02 R02-01 X20 X20-02 R01 R01-02 R02 R02-02 X20 X20-03 D10 D10-03 R01 R01-03 R02 R02-03	Source ID CS ID tag Zone D18 D18-01 A X20 X20-01 A X35 X35-01 A D10 D10-01 B R01 R01-01 B R02 R02-01 B X20 X20-02 B R01 R01-02 C R02 R02-02 C X20 X20-03 C D10 D10-02 D D10 D10-03 D R01 R01-03 D R02 R02-03 D	Source ID CS ID tag Zone for Analysis D18 D18-01 A Low X20 X20-01 A Low X35 X35-01 A Low D10 D10-01 B Low R01 R01-01 B Low R02 R02-01 B Low X20 X20-02 B Low R01 R01-02 C Low R02 R02-02 C Low X20 X20-03 C Low D10 D10-02 D Low D10 D10-03 D Low R01 R01-03 D Low R02 R02-03 D Low	Source ID CS ID tag Zone for Analysis Number D18 D18-01 A Low 1 X20 X20-01 A Low 1 X35 X35-01 A Low 1 D10 D10-01 B Low 1 R01 R01-01 B Low 1 R02 R02-01 B Low 1 X20 X20-02 B Low 1 R01 R01-02 C Low 1 R02 R02-02 C Low 1 X20 X20-03 C Low 1 D10 D10-02 D Low 1 D10 D10-03 D Low 1 R01 R02-03 D Low 1 R02 R02-03 D Low 1

APPENDIX C

Morgans Landing
Drinking Water Protection Area
and Potential and Existing Contaminant Sources
(Map 1)

Drinking Water Protection Areas for the Public Water Well System for PWS #248226.001 Div. of Parks Morgan's Landing Showing Potential and Existing Sources of Contamination

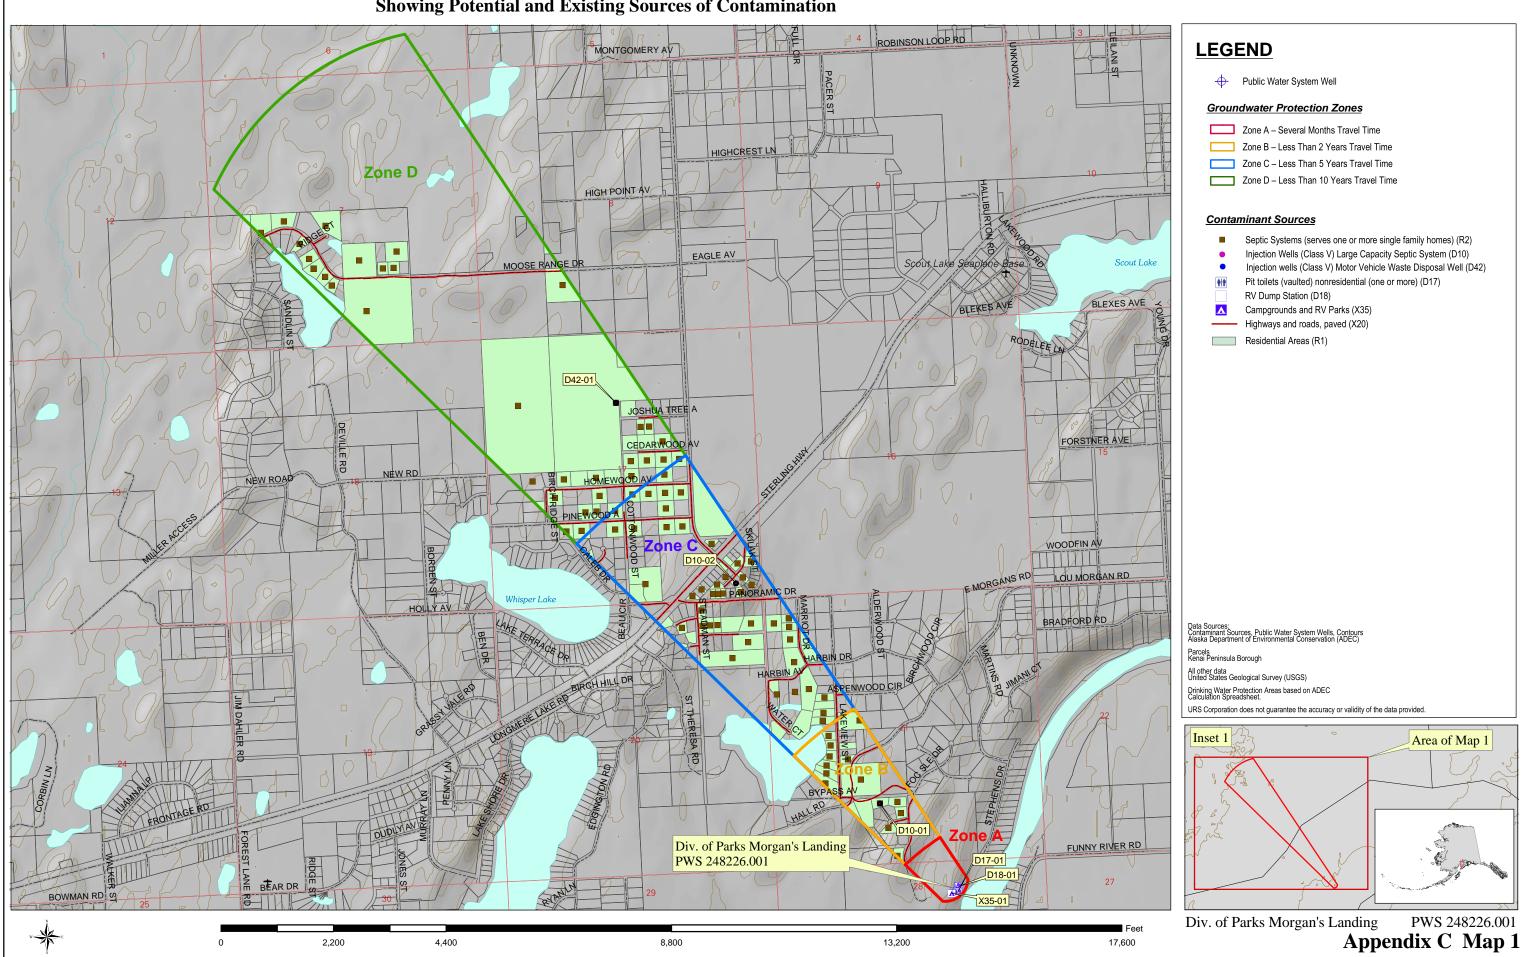

APPENDIX D

Vulnerability Analysis for Morgans Landing Public Drinking Water Source (Charts 1-8)

Chart 1. Susceptibility of the wellhead - Morgans Landing (248226.001) Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 pts Is the well Increase susceptibility 5 pts + 0 pts properly grouted? Is the well Increase susceptibility 20 pts 0 pts capped? YES YES Susceptibility of wellhead Very High 20 pts YES Increase susceptibility: Is the well 10 pts: suspected floodplain + 20 pts within a Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts 10 to < 15 pts medium NO < 10 pts low Is the land surface sloped Increase susceptibility 5 pts 0 pts away from the

Page 1 of 13

Chart 2. Susceptibility of the aquifer - Morgans Landing (248226.001)

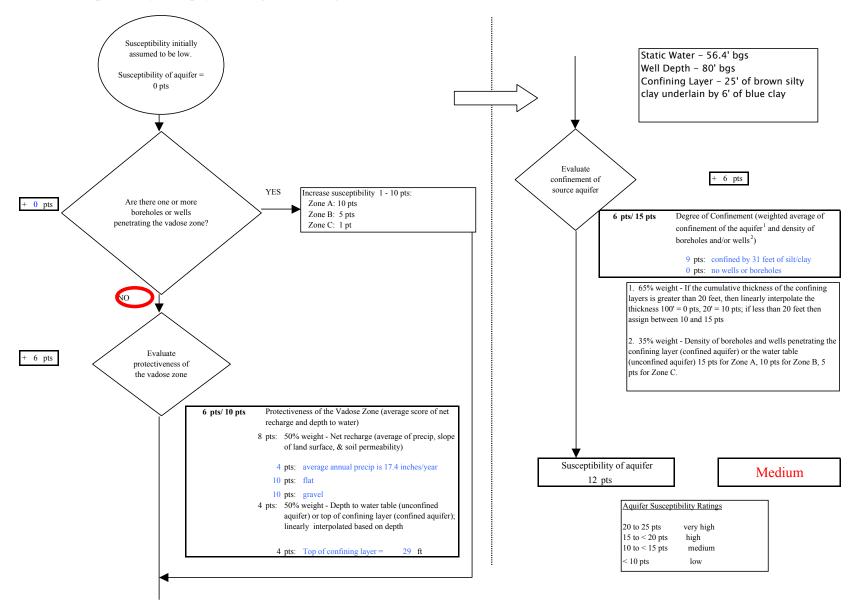
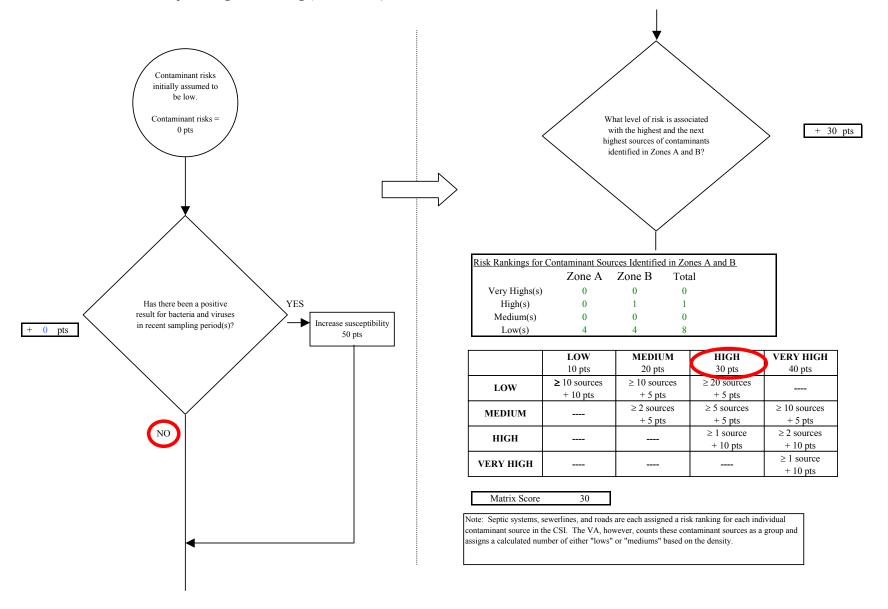
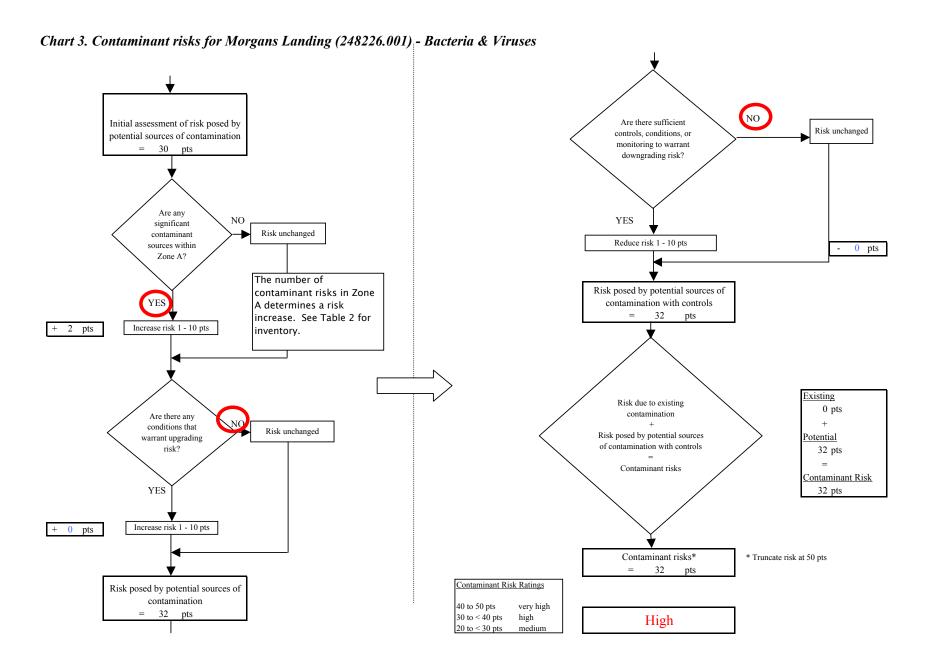


Chart 3. Contaminant risks for Morgans Landing (248226.001) - Bacteria & Viruses







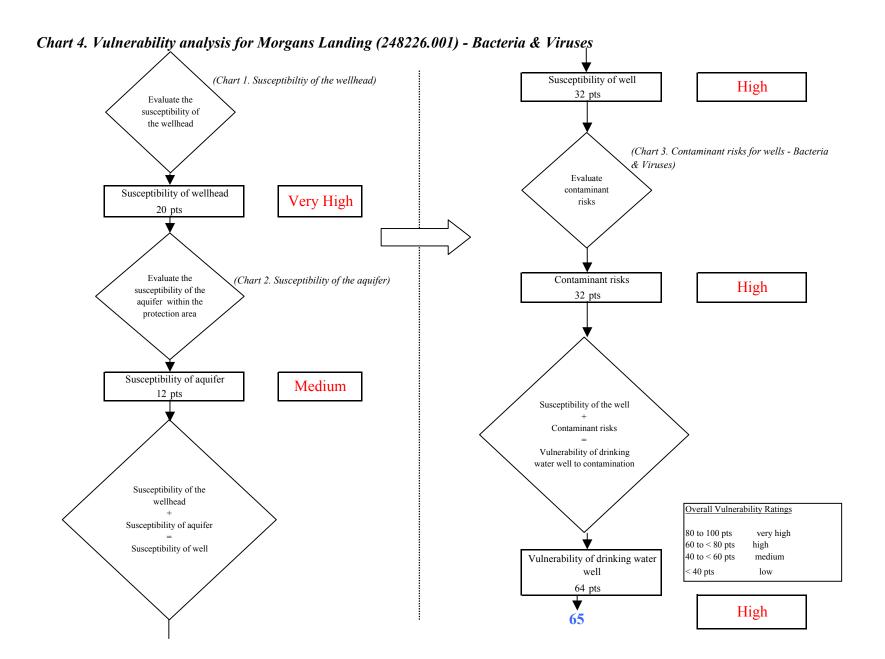


Chart 5. Contaminant risks for Morgans Landing (248226.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources NO or Is the concentration of Has nitrates and/or UNKNOWN the contaminant nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 5/14/2001 8/22/2000 ND 5/25/1999 ND 7/30/1998 ND Increasing: risk up 1 - 10 pts YES 8/9/1997 ND Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Level (MCL) = 10 mg/LDetected Nitrate Level = Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect sources made sources [MCL = 50 pts; detect = 0 pts]0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources YES

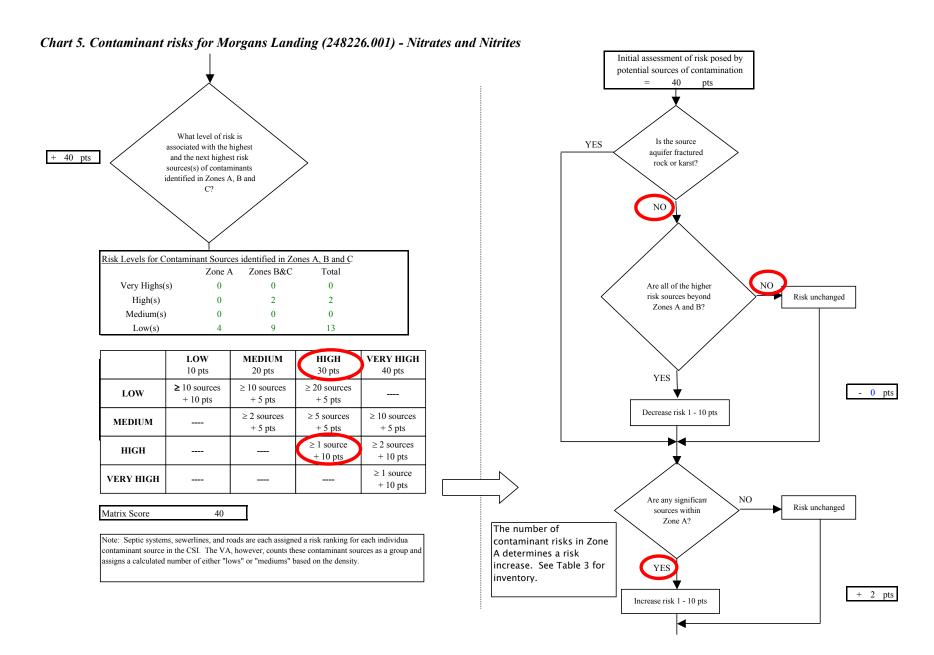

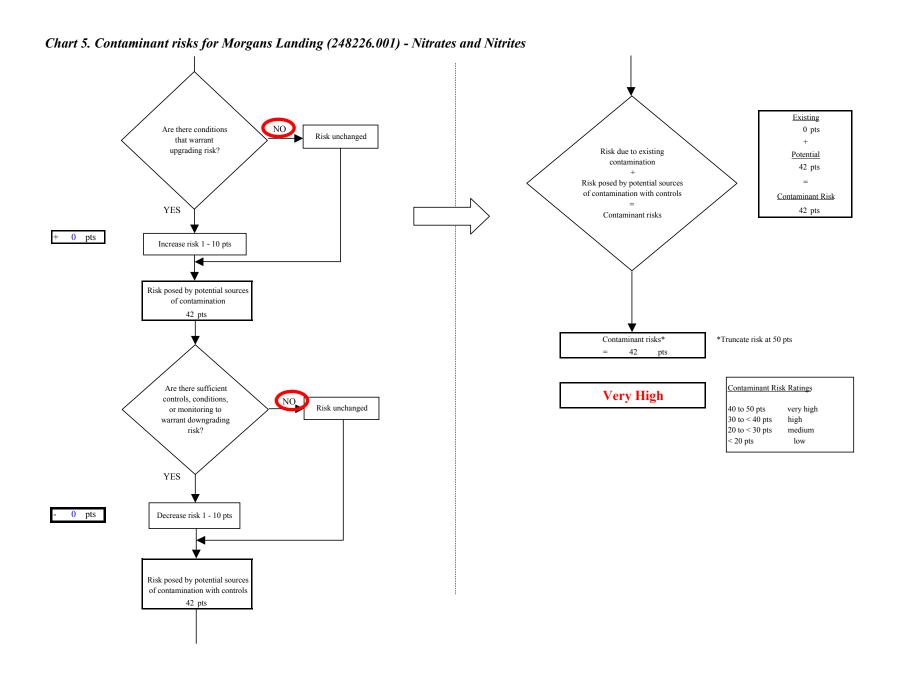

Page 8 of 13

Chart 6. Vulnerability analysis for Morgans Landing (248226.001) - Nitrates and Nitrites (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well High 32 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate Susceptibility of wellhead contaminant risks Very High 20 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Very High susceptibility of the 42 pts aquifer within the protection area Susceptibility of aquifer Medium 12 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 74 pts High **75**

Page 9 of 13

Chart 7. Contaminant risks for Morgans Landing (248226.001) - Volatile Organic Chemicals Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks background contamination due to man-= 0 ptscontamination from made source(s) natural sources NO or Is the concentration of UNKNOWN Have volatile organic the contaminant chemicals been detected increasing, decreasing, in the source waters in or staying the same? recent sampling Recent VOC Sampling period(s)? Results (mg/L) No organic samples on file for this PWSID Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Existing contamination points based on Risk due to existing man-Risk due to natural linear interpolation of most recent detect made sources sources [MCL = 50 pts; detect = 0 pts]0 pts Risk due to existing contamination 0 pts Was the source of Evaluate the level of contamination contamination from natural? man-made sources YES

Page 10 of 13

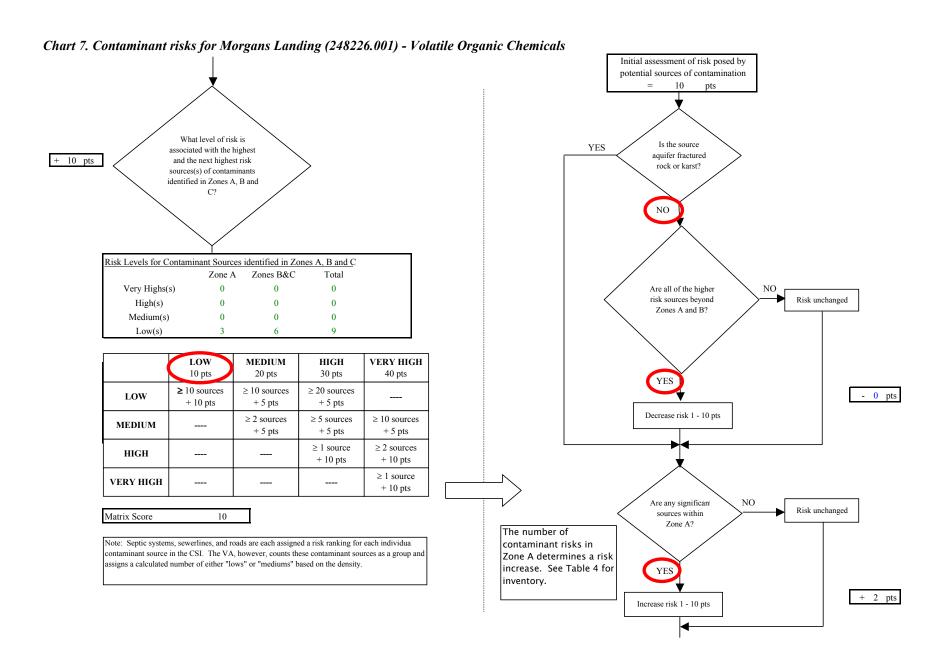


Chart 7. Contaminant risks for Morgans Landing (248226.001) - Volatile Organic Chemicals Existing The number of Are there conditions NO 0 pts Risk unchanged contaminant ris! that warrant in Zone D upgrading risk? Risk due to existing Potential determines a risk contamination 14 pts increase. See Risk posed by potential sources Table 4 for of contamination with controls Contaminant Risk inventory. YES 14 pts Contaminant risks 2 pts Increase risk 1 - 10 pts Risk posed by potential sources of contamination 14 pts *Truncate risk at 50 pts Contaminant risks* 14 Contaminant Risk Ratings Are there sufficient Low controls, conditions, NO Risk unchanged or monitoring to 40 to 50 pts very high 30 to < 40 pts warrant downgrading high 20 to < 30 pts risk? medium < 20 pts low YES 0 pts Decrease risk 1 - 10 pts Risk posed by potential sources of contamination with controls 14 pts

Page 12 of 13

Chart 8. Vulnerability analysis for Morgans Landing (248226.001) - Volatile Organic Chemicals (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well High 32 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate Susceptibility of wellhead contaminant risks Very High 20 pts Evaluate the (Chart 2. Susceptibility of the aquifer) Contaminant risks Low susceptibility of the 14 pts aquifer within the protection area Susceptibility of aquifer Medium 12 pts Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high Susceptibility of well 60 to < 80 pts high 40 to < 60 pts medium Vulnerability of drinking water well < 40 pts 46 pts Medium 45

Page 13 of 13