



Source Water Assessment

A Hydrogeologic Susceptibility and
Vulnerability Assessment for
Mary's McKinley View
Drinking Water System,
Talkeetna, Alaska
Mary's McKinley View # 222929

DRINKING WATER PROTECTION PROGRAM REPORT # 230 Alaska Department of Environmental Conservation

Source Water Assessment for Mary's McKinley View Drinking Water System, Talkeetna, Alaska Mary's McKinley View # 222929

By Shannon & Wilson, Inc.

DRINKING WATER PROTECTION PROGRAM REPORT # 230

CONTENTS

	Page		Page			
Executive Summary	1	Inventory of Potential and Existing				
Introduction	1	Contaminant Sources	3			
Description of the Upper Susitna River Region	2	Ranking of Contaminant Risks	3			
Mary's McKinley View Public Drinking Water		Vulnerability of Mary's McKinley View				
System	2	Drinking Water Source	3			
Mary's McKinley View Protection Area	2	Summary	4			
		References Cited	6			
	TABI	LES				
Table 1 - Definition of Zones			3			
Table 2 - Natural Susceptibility - Susceptibility o	f the Wellh	nead and Aquifer to Contamination	4			
Table 3 - Contaminant Risks			1			
Table 4 - Overall Vulnerability of Mary's McKinley View to Contamination by Category						
ILL	USTR	ATIONS				
			Page			
FIGURE 1. Index map showing the locati	on of the U	Jpper Susitna River Region	1			
A	PPENI	DICES				
APPENDIX A. Mary's McKinley View Dr	inking Wa	ter Protection Area (Map 1)				
B. Contaminant Source Invent						
		nd Risk Ranking for Mary's McKinley View –				
Bacteria and Viruses (nd Risk Ranking for Mary's McKinley View –				
Nitrates/Nitrites (Table		and Risk Ranking for Mary's McKiniey view –				
		nd Risk Ranking for Mary's McKinley View –				
Volatile Organic Chen						
C. Mary's McKinley View Dr Existing Contaminant		ter Protection Area and Potential and Map 2)				
		ant Source Inventory and Risk Ranking for brinking Water Source (Charts 1 – 8)				

Source Water Assessment for Mary's McKinley View Source of Public Drinking Water, Talkeetna, Alaska

By Shannon & Wilson, Inc.

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The Mary's McKinley View is a Class B (transient/non-community) water system consisting of one well, north of Talkeetna, Alaska. Identified potential and current sources of contaminants for Mary's McKinley View public drinking water source include: large-capacity and single-family septic systems; roads, and electrical power generators. These identified potential and existing sources of contamination are considered sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water sources for Mary's McKinley View received a vulnerability rating of **Medium** for volatile organic chemicals, **Medium** for bacteria and viruses, and **High** for nitrates and nitrites.

INTRODUCTION

The Alaska Department of Environmental Conservation (ADEC) is completing source water assessments for all public drinking water sources in the State of Alaska. The purpose of this assessment is to provide owners and/or operators, communities, and local governments with information they can use to preserve the quality of Alaska's public drinking water supplies. The results of this source water assessment can be used to decide where voluntary protection efforts are needed and feasible, and also what efforts will be most effective in reducing contaminant risks to your water system. Shannon & Wilson has been contracted to perform these assessments under the supervision of ADEC.

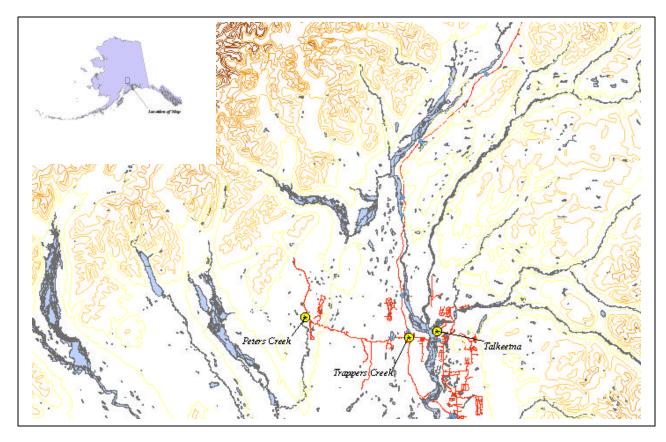


Figure 1. Index map showing the location of the Upper Susitna River Region.

This source water assessment combines a review of the natural conditions at the site and the potential and existing contaminant risks. These are combined to determine the overall vulnerability of the drinking water source to contamination.

DESCRIPTION OF THE UPPER SUSITNA RIVER REGION

Location

The Susitna River watershed is the largest watershed in Southcentral Alaska with the community of Talkeetna located at the confluence of the Chulitna, Talkeetna, and Susitna rivers. The area surrounding Talkeetna is shown in Figure 1. Talkeetna is located in the Matanuska-Susitna (Mat-Su) Borough.

Glacial and alluvial forces have shaped the Susitna Region surrounding Talkeetna. These forces have resulted in the broad U-shaped river valleys, lakes, streams and undulating ridges and hills. Landforms in and around the Middle Susitna River Region are typified by the broad river floodplains, low ridges and lowlands.

Precipitation

Talkeetna averages about 30 inches of precipitation per year, including about 107 inches of snowfall.

Topography and Drainage

The area topography varies from about 300 feet to 400 feet within the river floodplains to several thousand feet on the surrounding ridges and mountain flanks.

Groundwater

Although the quality can vary significantly in a short distance, groundwater supplies are generally abundant in the area. Many homes and businesses in the area rely on individual wells for their water supply. Most of these wells are shallow with depths of less than 100 feet to 200 feet. Static water levels in many of these wells are less than 15 feet below the surface. The coarse, alluvial, sandy gravel in the floodplains of the areas streams and rivers provides a large aquifer even in the winter when infiltration is low.

Geology and Soils

Most of the soils in the area provide good sources of sand, gravel and topsoil. The deposition of silt, clay and organic muck in old lakes, oxbows and depressions means that some areas have soil conditions that vary over relatively short distances.

MARY'S MCKINLEY VIEW PUBLIC DRINKING WATER SYSTEM

Mary's McKinley View is a Class B (transient/non-community) water system. The system consists of one well at Mile 134.5 of the Parks Highway.

According to a report for the design of the wastewater system, installation of the well was to a total depth of approximately 133 feet below ground surface and was completed in 6-inch well casing. The most recent Sanitary Survey (8/28/99) indicates the well was installed with a cap providing a sanitary seal. A properly installed sanitary seal may provide protection against contaminants from entering the source waters at the well casing. The land surface is also appropriately sloped away from the well providing adequate surface water drainage. The well was not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing and into source waters.

This system operates year-round and serves no residents and more than 100 non-residents through one service connection.

MARY'S MCKINLEY VIEW DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. Some areas are more likely to allow contamination to reach the well than others. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the Drinking Water Protection Area (DWPA). Because a release of contaminants within the DWPA are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts.

An analytical calculation was used to determine the size and shape of the DWPA. The input parameters describing the attributes of the aquifer in this calculation were adopted from the U.S. Geological Survey (*Patrick, Brabets, and Glass, 1989*), and State of Alaska Department of Water Resources. Additional methods were also used to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful DWPA (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The DWPAs established for wells by the ADEC are separated into four zones. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well. The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four DWPA zones and the calculated TOT for each:

Table 1. Definition of Zones

Definition
¹ / ₄ the distance for the 2 year TOT
Less than the 2 year TOT
Less Than the 5 year TOT
Less than the 10 year TOT

As an example, water moving through the aquifer in Zone B will reach the well in less than 2 years from the time it crosses the outer limit of Zone B.

Zone A also incorporates the area downgradient from the well to take into account the area of the aquifer that is influenced by pumping of the well. Water within the aquifer in Zone A will reach the well in several hours to several months.

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Mary's McKinley View DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried, they include:

- Bacteria and viruses:
- Nitrates and/or nitrites; and
- Volatile organic chemicals.

Inventoried potential sources of contamination within Zones A through Zone D were associated with residential and light industrial type activities. The sources are summarized in the tables in Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are sorted and ranked according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Further, contaminant risks are a function of the number and density of those types of contaminant sources as well as the proximity of those sources to the well.

VULNERABILITY OF MARY'S MCKINLEY VIEW DRINKING WATER SOURCE

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Each of the three categories of drinking water contaminants has been analyzed and an overall vulnerability score of 0 to 100 is ultimately assigned:

Natural Susceptibility (0 - 50 points)

+

Contaminant Risks (0 - 50 points)

=

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

A score for the Natural Susceptibility is achieved by analyzing the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 - 25 Points)

+

Susceptibility of the Aquifer (0 - 25 Points)

=

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

The well for Mary's McKinley View is completed in an unconfined aquifer setting. Because an unconfined aquifer is recharged by surface water and precipitation that migrates downward from the surface, contaminants at the surface have the potential to adversely impact this aquifer. Table 2 shows the Overall Susceptibility score and rating for Mary's McKinley View.

Table 2. Natural Susceptibility - Susceptibility of the Wellhead and Aquifer to Contamination

	Score	Rating
Susceptibility of the	5	Low
Wellhead		
Susceptibility of the	11	Medium
Aquifer		
Natural Susceptibility	16	Low

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This data has been derived from an examination of existing or historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	40	Very High
Nitrates and/or Nitrites	50	Very High
Volatile Organic Chemicals	25	Medium

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally-occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses.' Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

Table 4 contains the overall vulnerability scores (0 – 10) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability of Mary's McKinley View to Contamination by Category

Category	Score	Rating
Bacteria and Viruses	55	Medium
Nitrates and Nitrites	65	High
Volatile Organic Chemicals	40	Medium

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

The large-capacity and single-family septic systems; roads, and electrical power generators create a risk increase for the bacteria and viruses, nitrates and nitrites, and volatile organic compounds.

Only a small amount of bacteria and viruses are required to endanger public health. Bacteria and viruses have not been detected during recent water sampling of the system at Mary's McKinley View.

Nitrates and/or nitrites are found in natural background concentration at this site, as elsewhere throughout Alaska. Nitrate concentrations in uncontaminated groundwater are typically less than 2 milligrams per liter (mg/L) and are derived primarily from the decomposition of organic matter in soils, adopted from the U.S. Geological Survey (Wang, et al., 2000).

Sampling history for Mary's McKinley View well indicates that no samples are on file (see Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). The Maximum Contaminant Level (MCL) for Nitrates is 10 mg/L. The MCL is the maximum level of contaminant that is allowed to exist in drinking water and still be consumed by humans without harmful health effects. Due to the high solubility and weak retention by soil, nitrates are very mobile, moving at approximately the same rate as water.

SUMMARY

A Source Water Assessment has been completed for the sources of public drinking water serving Mary's McKinley View. The overall vulnerability of this source to contamination is **Medium** for volatile organic chemicals, **Medium** for bacteria and viruses, and **High** for nitrates and nitrites. This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of Mary's McKinley View to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of Mary's McKinley View public drinking water source.


REFERENCES CITED

- Patrick, L.D., Brabets, T.P., and Glass, R.L., 1989, Simulation of ground-water flow at Anchorage, Alaska: US Geological Survey Water-Resources Investigations Report 88-4139, 41p.
- Wang, B., Strelakos, P.M., and Jokela, J.B., 2000, Nitrate source indicators in ground water of the scimitar subdivision, Peters Creek Area, Anchorage, Alaska: US Geological Survey Water-Resources Investigations Report 00-4137.
- Weather Underground, June 18, 2002, Web extension to the *Western Regional Climate Center* [WWW document]. URL http://www.wunderground.com

APPENDIX A

Mary's McKinley View Drinking Water Protection Area (Map 1)

Drinking Water Protection Areas for Mary's McKinley View

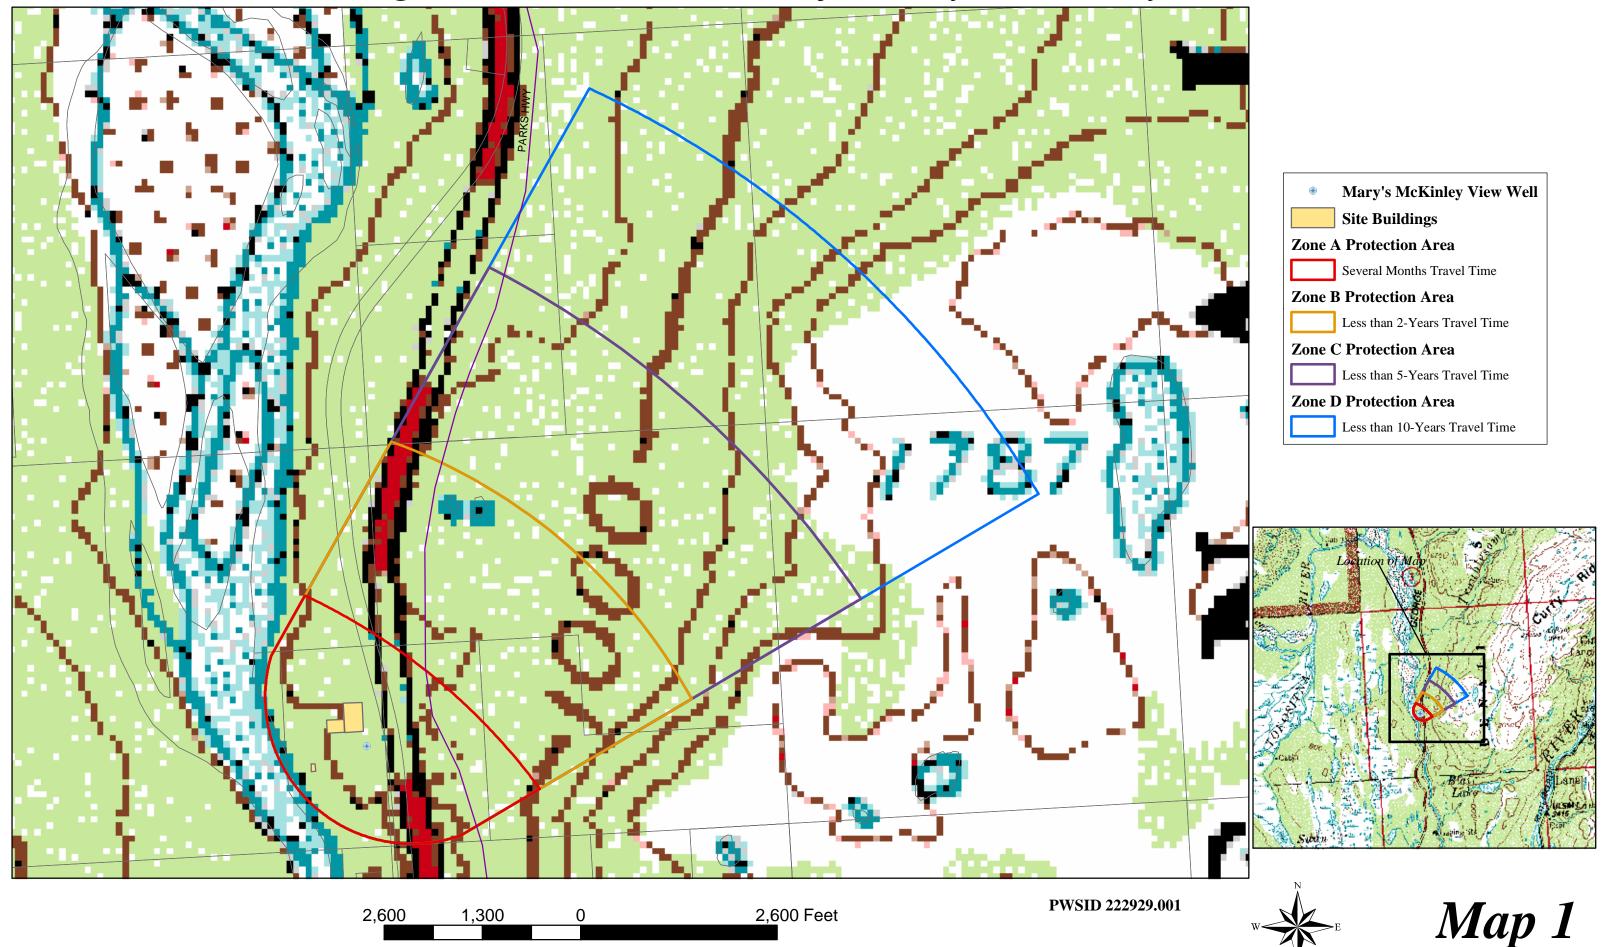

APPENDIX B

Contaminant Source Inventory and Risk Ranking for Mary's McKinley View (Tables 1-4)

Contaminant Source Inventory for Mary's McKinley View

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Location	Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	SW of restaurant	3	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Parks Highway	2	
Electric power generation (fossil fuels)	X36	X36-1	A	SW of restaurant	3	
Septic systems (serves one single-family home)	R02	R2-1	C	North of restaurant, west of Parks Highway	3	

PWSID 222929.001

Mary's McKinley View

Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Overall Rank after Analysis		Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	High	1	SW of restaurant	3	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Parks Highway	2	
Septic systems (serves one single-family home)	R02	R2-1	С	Low	3	North of restaurant, west of Parks Highway	3	

Table 3

Mary's McKinley View

Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Overall Rank after Analysis		Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	High	1	SW of restaurant	3	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Parks Highway	2	
Septic systems (serves one single-family home)	R02	R2-1	С	Low	3	North of restaurant, west of Parks Highway	3	

Table 4

Mary's McKinley View


Sources of Volatile Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Overall Rank after Analysis	Location	Map Number	Comments
Electric power generation (fossil fuels)	X36	X36-1	A	Medium	1	SW of restaurant	3	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-1	A	Low	2	SW of restaurant	3	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	3	Parks Highway	2	
Septic systems (serves one single-family home)	R02	R2-1	C	Low	4	North of restaurant, west of Parks Highway	3	

APPENDIX C

Mary's McKinley View
Drinking Water Protection Area
and Potential and Existing Contaminant Sources
(Maps 2-3)

Drinking Water Protection Areas for Mary's McKinley View and Potential and Existing Sources of Contamination

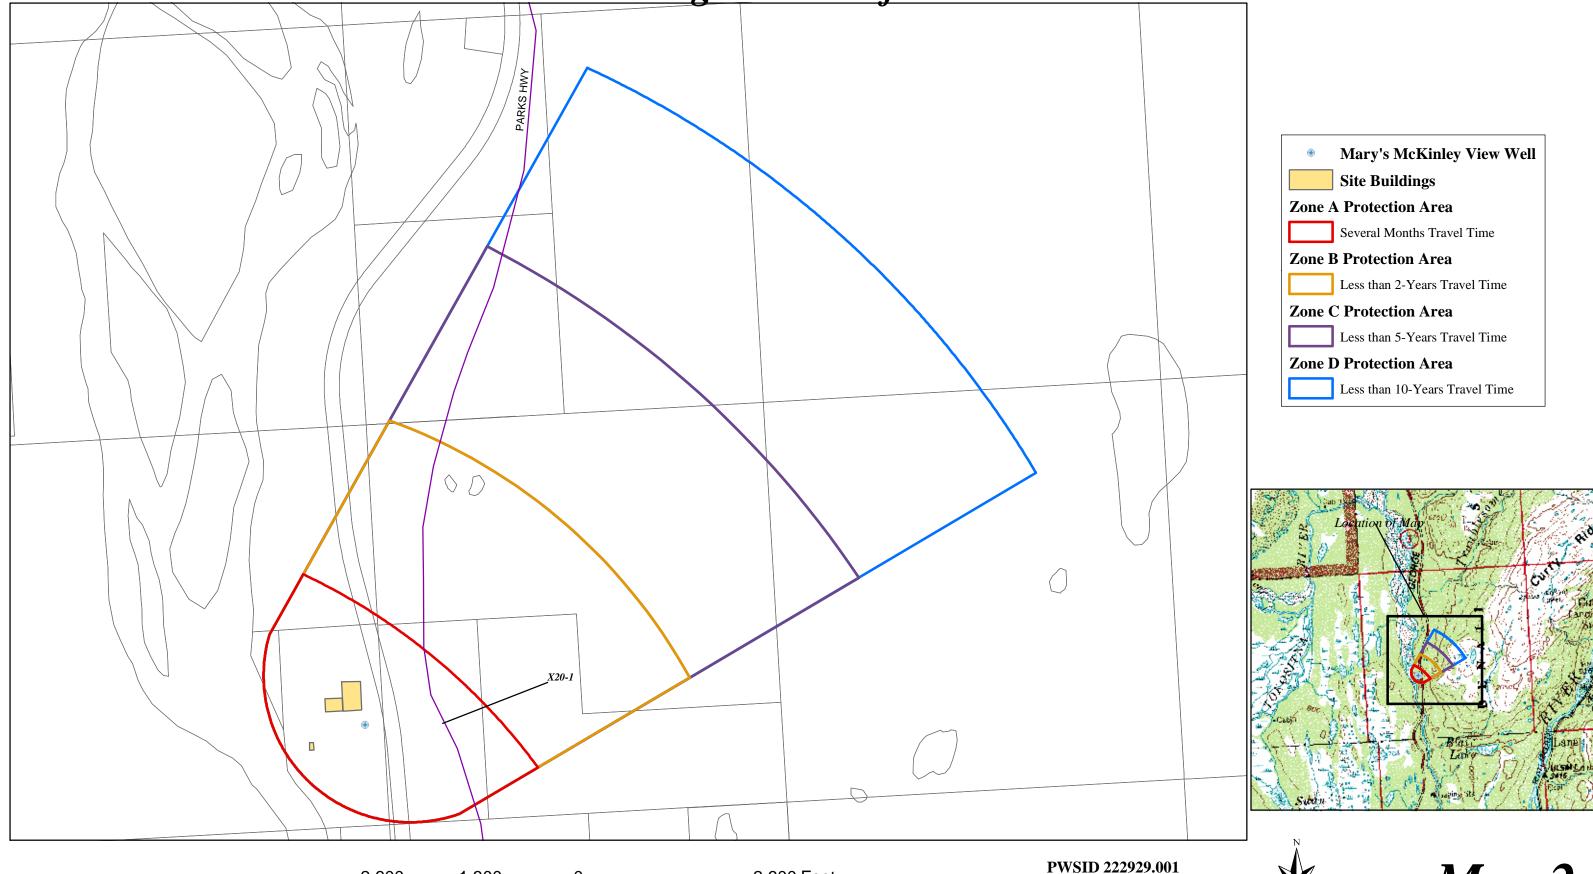

2,600 Feet

2,600

1,300

 $W \longrightarrow E$

Map 2

Drinking Water Protection Areas for Mary's McKinley View and Potential and Existing Sources of Contamination





2,500 Feet

2,500

1,250



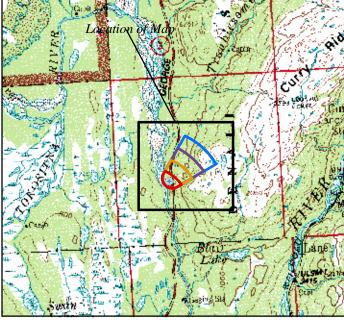




APPENDIX D


Vulnerability Analysis for Mary's McKinley View Public Drinking Water Source (Charts 1-8)


Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 ptsNO Is the well Increase susceptibility 5 pts properly + 5 pts grouted? Is the well Increase susceptibility 20 pts + 0 pts capped? YES YES Susceptibility of wellhead Low 5 pts YES Increase susceptibility: Is the well 10 pts: suspected floodplain pts within a Wellhead Susceptibility Ratings 20 pts: known floodplain floodplain? 20 to 25 pts very high 15 to < 20 pts high 10 to < 15 pts medium NO < 10 pts low Is the land NO surface sloped Increase susceptibility 5 pts + 0 pts away from the well?

Chart 1. Susceptibility of the Wellhead - Mary's McKinley View


Chart 2. Susceptibility of the Aquifer - Mary's McKinley View

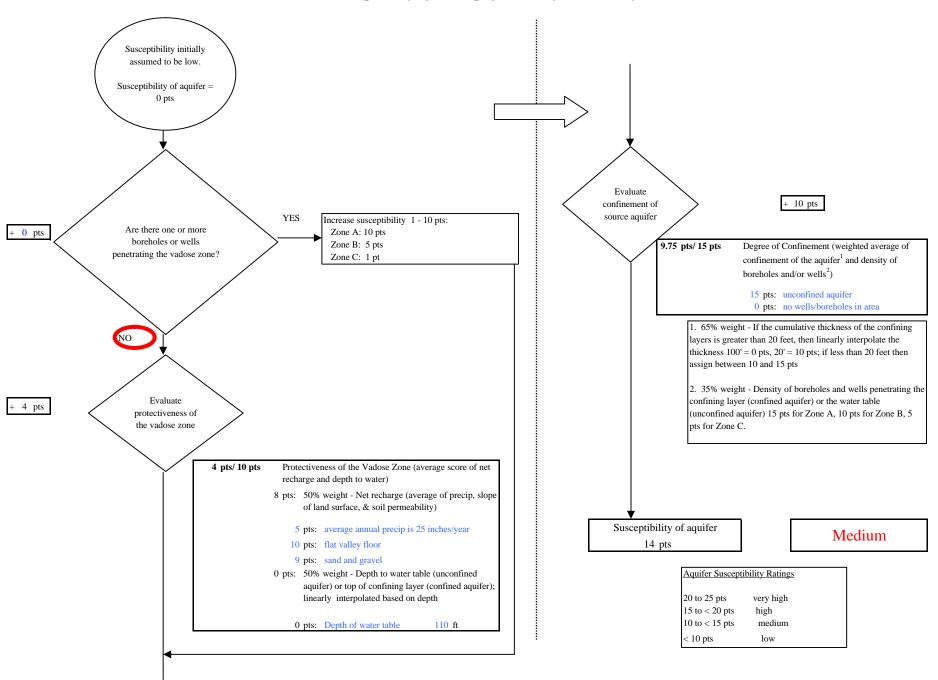


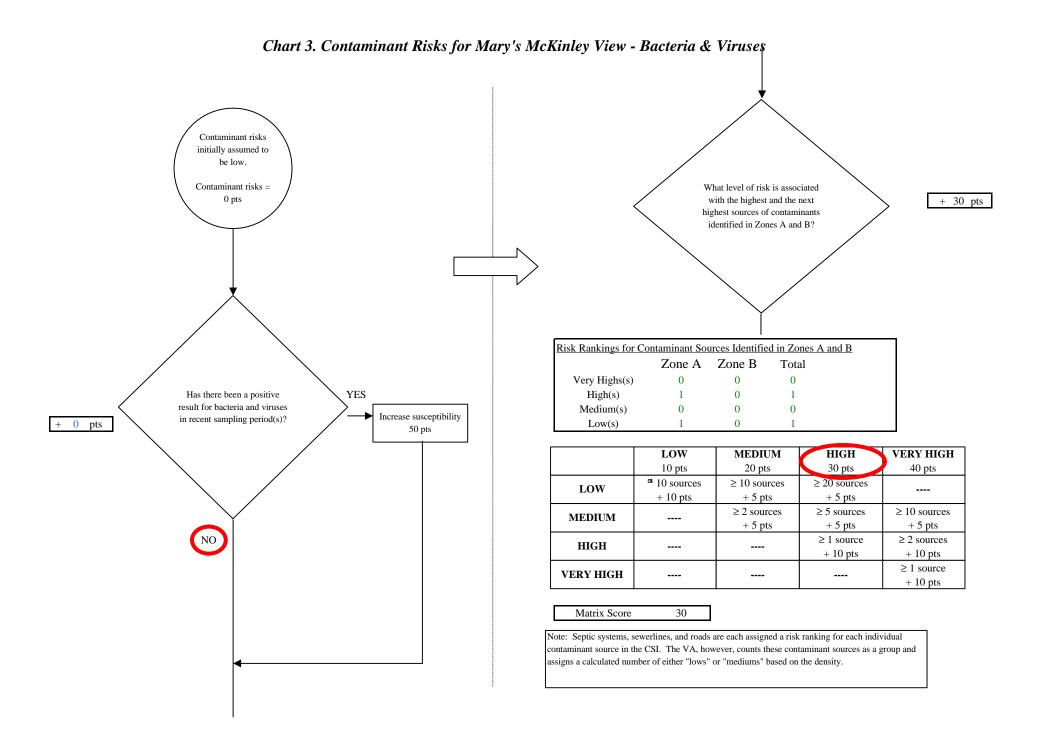

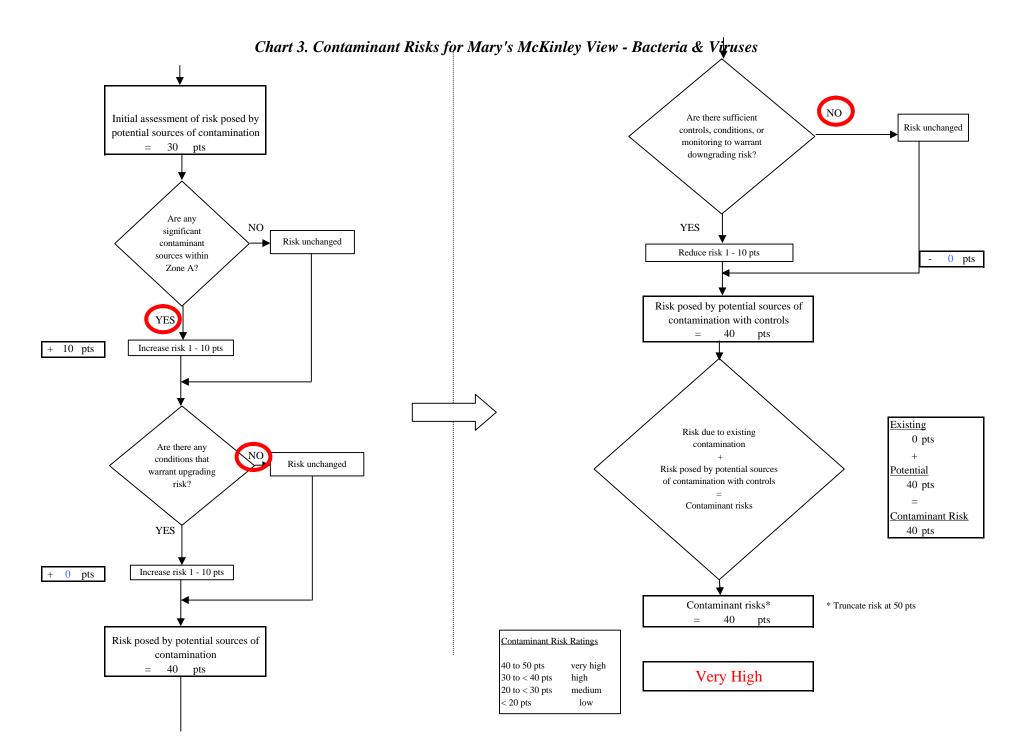


Page 2 of 2

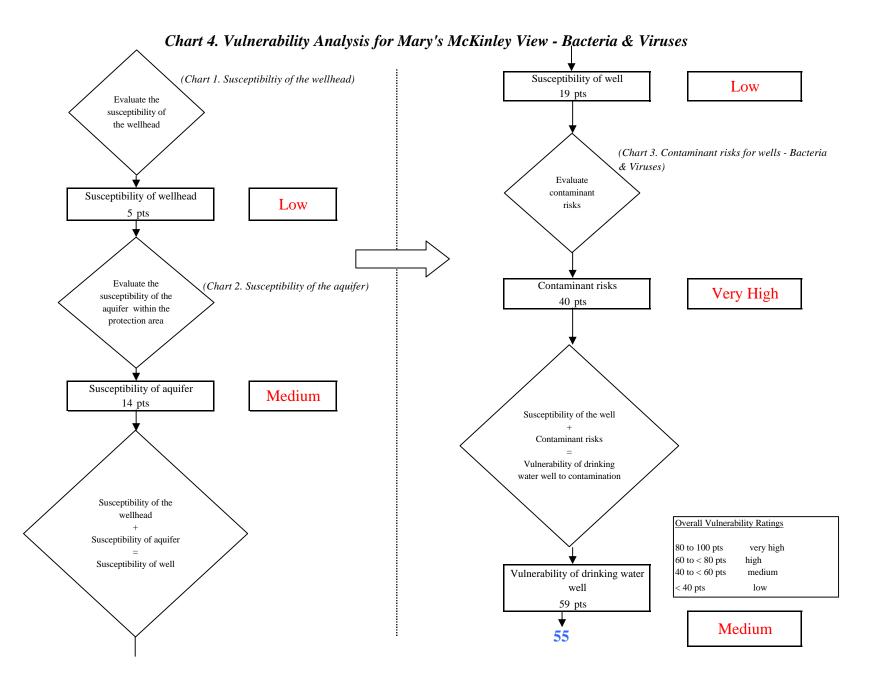

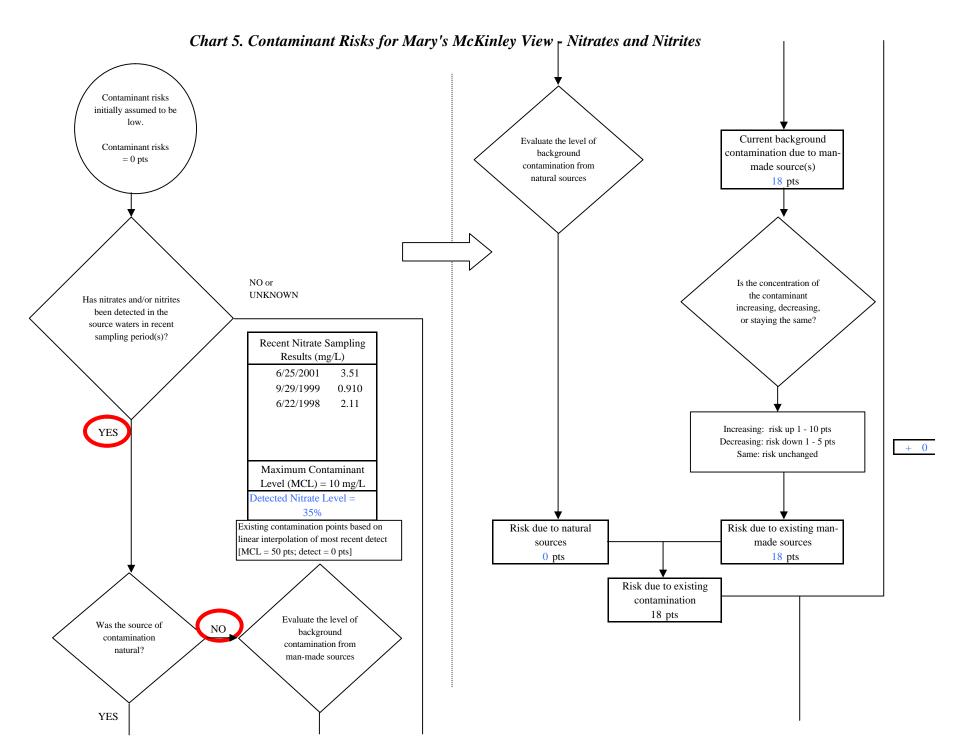

Page 1 of 6

Chart 5. Contaminant Risks for Mary's McKinley View - Nitrates and Nitrites

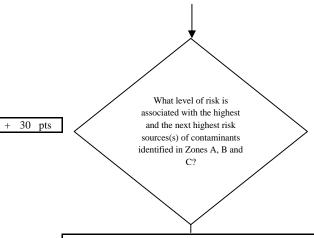



Risk Levels for Contaminant Sources identified in Zones A, B and C					
	Zone A	Zones B&C	Total		
Very Highs(s)	0	0	0		
High(s)	1	0	1		
Medium(s)	0	0	0		
Low(s)	1	1	2		

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	3 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts


Matrix	Score	30


Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

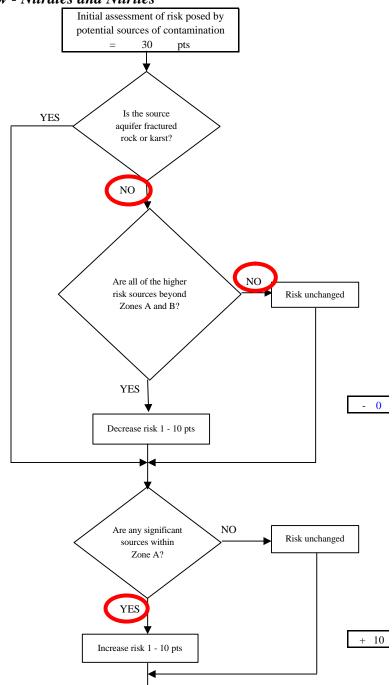

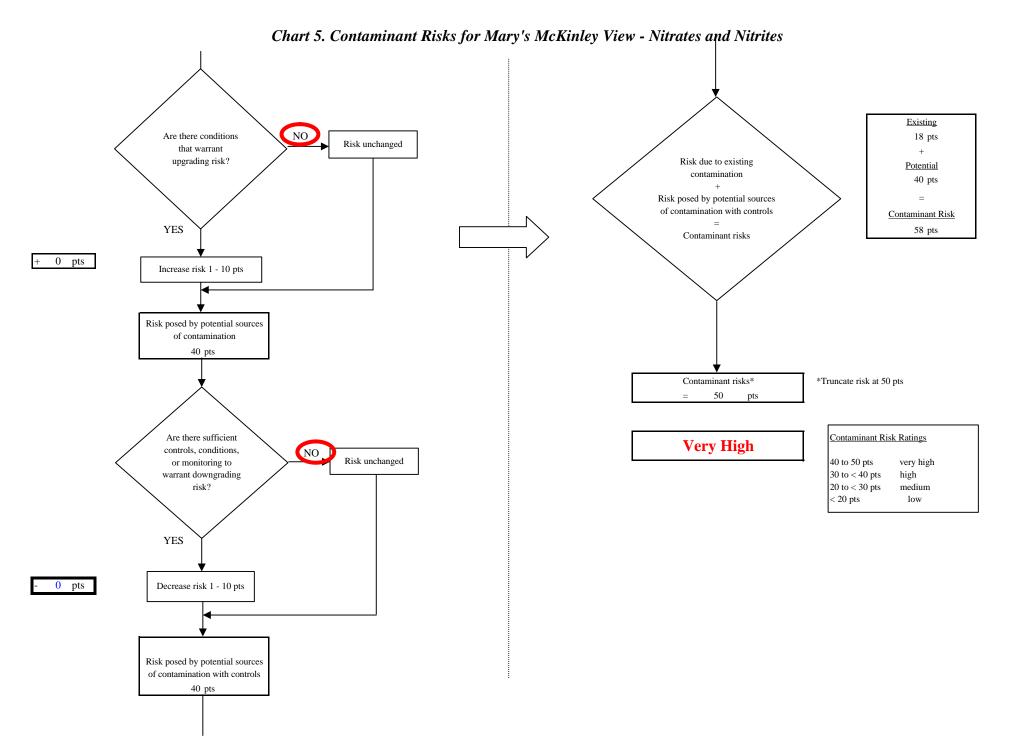


Page 3 of 6

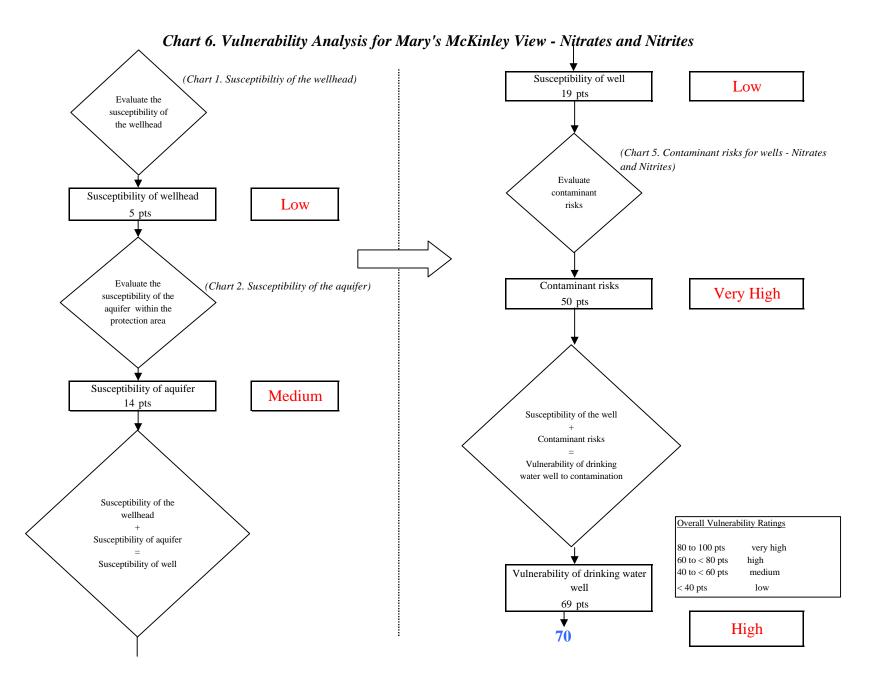

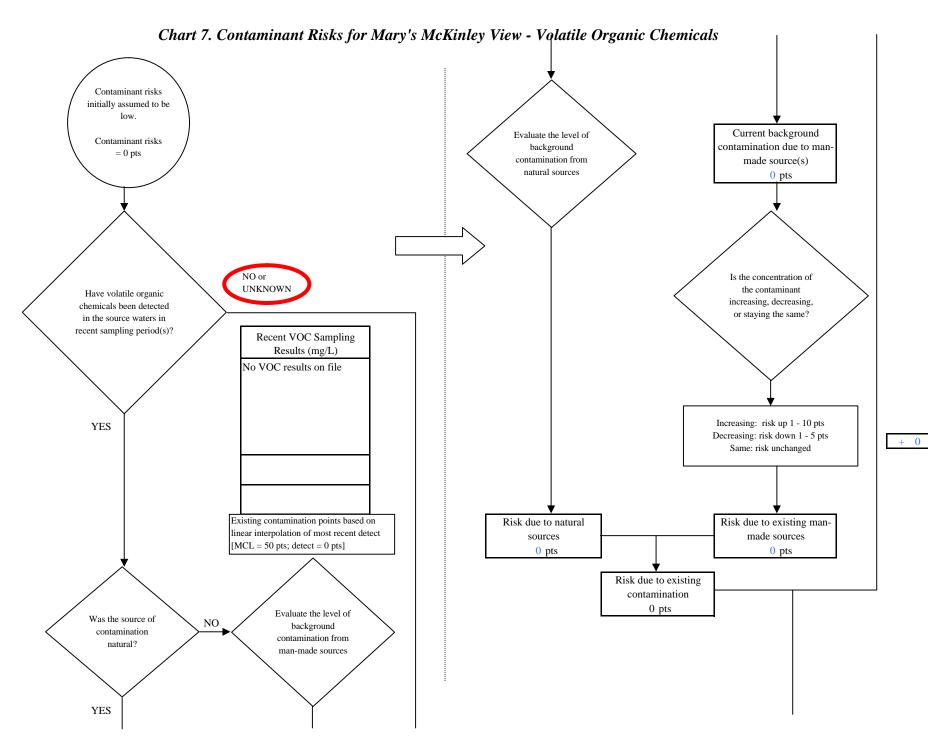

Page 1 of 6

Chart 7. Contaminant Risks for Mary's McKinley View - Volatile Organic Chemicals

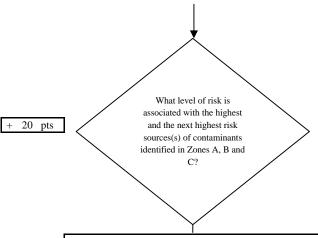



Risk Levels for Contaminant Sources identified in Zones A, B and C					
	Zone A	Zones B&C	Total		
Very Highs(s)	0	0	0		
High(s)	0	0	0		
Medium(s)	1	0	1		
Low(s)	2	1	3		

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	* 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score	20

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

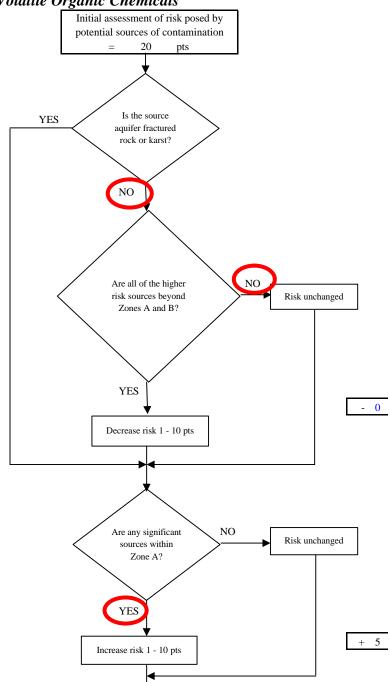

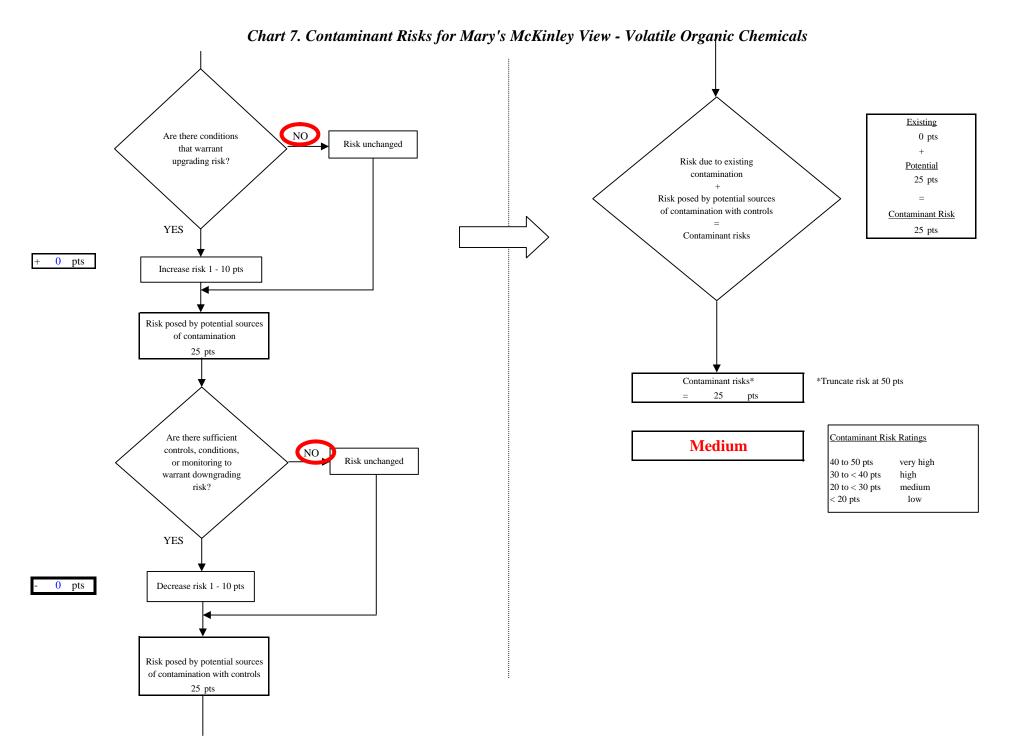

Page 3 of 6

