



Source Water Assessment

A Hydrogeologic Susceptibility and
Vulnerability Assessment for
LDS Willow Chapel
Public Drinking Water System,
Willow, Alaska
PWSID # 222995.001

DRINKING WATER PROTECTION REPORT 1661

Alaska Department of Environmental Conservation

January, 2009

Source Water Assessment for
LDS Willow Chapel
Public Drinking Water System,
Willow, Alaska
PWSID# 222995.001

DRINKING WATER PROTECTION REPORT 1661

The Drinking Water Protection (DWP) section of the Drinking Water Program is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (DEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the DWP staff at the following toll-free number 1-866-956-7656.

January, 2009

CONTENTS

	Page		Page
Executive Summary.....	1	Vulnerability of LDS Willow Chapel Drinking Water	
LDS Willow Chapel Public Drinking Water System ...	1	System.....	2
LDS Willow Chapel Drinking Water Protection Area .	1	References.....	5
Inventory of Potential and		Appendix A.....	7
Existing Contaminant Sources.....	2	Appendix B.....	9
Ranking of Contaminant Risks.....	2	Appendix C.....	11

TABLES

Table 1. Definition of Zones.....	2
Table 2. Susceptibility.....	3
Table 3. Contaminant Risks.....	3
Table 4. Overall Vulnerability.....	3

APPENDICES

- APPENDIX
- A. LDS Willow Chapel Drinking Water Protection Area (Map A)
 - B. Contaminant Source Inventory for LDS Willow Chapel (Table 1)
 - Contaminant Source Inventory and Risk Ranking for LDS Willow Chapel – Bacteria and Viruses (Table 2)
 - Contaminant Source Inventory and Risk Ranking for LDS Willow Chapel – Nitrates/Nitrites (Table 3)
 - Contaminant Source Inventory and Risk Ranking for LDS Willow Chapel – Volatile Organic Chemicals (Table 4)
 - C. LDS Willow Chapel Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

Source Water Assessment for LDS Willow Chapel Source of Public Drinking Water, Willow, Alaska

Drinking Water Protection Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The public water system for LDS Willow Chapel is a Class B (transient/non-community) water system consisting of one well located on the Parks Highway near Willow, Alaska. The wellhead received a susceptibility rating of **Low** and the aquifer received a susceptibility rating of **High**. Combining these two ratings produces a **Medium** rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for LDS Willow Chapel public drinking water source include: assumed septic systems, assumed heating oil tanks, a coal mining area, and a rail corridor. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water sources for LDS Willow Chapel received a vulnerability rating of **Low** for bacteria and viruses, **Low** for nitrates and nitrites, and **High** for volatile organic chemicals. This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of LDS Willow Chapel to protect public health.

LDS WILLOW CHAPEL PUBLIC DRINKING WATER SYSTEM

The LDS Willow Chapel public water system is a Class B (transient/non-community) water system. The system consists of one well located about a quarter mile north of the Nancy Lakes Access Road on the Parks Highway, near Willow, Alaska (see Map A in Appendix A). Willow lies between miles 60 and 80.7 of the Parks Highway and is part of the Matanuska-Susitna Borough. Temperatures in January can range from -33 to 33, while in July temperatures can range from 42 to 83. Willow receives between 16 and 27 inches of precipitation per year and up to 150 inches of snowfall. The population of Willow is 2,048 and the population of the Matanuska-Susitna Borough as a whole is 80,088 (ADCCED, 2009).

Most homes in Willow use individual wells and septic tanks, but seasonal homes haul water and use outhouses. Electricity is provided by Matanuska Electric Association and refuse is hauled to a transfer site on Willow-Fishhook Road (ADCCED, 2009).

This system operates continuously and serves 200 non-residents through at least one service connection.

LDS WILLOW CHAPEL DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the drinking water protection area. The drinking water protection area is the area circling the well (the area influenced by pumping) and also the area upgradient of the well, usually forming a parabola shape. Because releases of contaminants within the protection area are most likely to impact the well, this area will serve as the focus for voluntary protection efforts.

There are many different methods for calculating the size of protection areas. Drinking Water Protection (DWP) uses a combination of two simple groundwater flow equations, the Thiem and uniform flow equations for all groundwater wells screened in unconsolidated material. The orientation of the protection zone is then drawn using a water table elevation map (if available) or a land surface elevation map of the area. The protection zone calculated by DWP is an estimate using the available information and resources, and may differ slightly from the actual capture zone. Because of uncertainties and changing site conditions, a factor of safety is added to the protection zone to form the drinking water protection area for the well.

The parameters used to calculate the shape of this protection zone are general for the whole alluvial plain and were obtained from various United States Geological Survey (USGS) reports, area well logs, and the Groundwater textbook by Freeze and Cherry (Freeze and Cherry, 1979).

The protection areas established for wells by the DEC are usually separated into two zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the

aquifer to the well. An analytical calculation was used to determine the size and shape of the protection area.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the two protection area zones for wells and the calculated time-of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	Several months time-of-travel
B	Less than the 2 year time-of-travel

The drinking water protection area for LDS Willow Chapel was determined using an analytical calculation and includes Zones A and B (See Map A of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

DWP has completed an inventory of potential and existing sources of contamination within the LDS Willow Chapel drinking water protection area. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, the following three categories of drinking water contaminants were inventoried:

- Bacteria and viruses;
- Nitrates and/or nitrites;
- Volatile organic chemicals

The sources are displayed on Map C of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a “potential” or “existing” source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low;
- Medium;
- High; and
- Very High.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF LDS WILLOW CHAPEL DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural Susceptibility; and
- Contaminant Risks.

A score for the Natural Susceptibility of the well is reached by considering the properties of the well and the aquifer.

$$\begin{aligned}
 &\text{Susceptibility of the Wellhead (0-25 Points)} \\
 &\quad + \\
 &\quad \text{Susceptibility of the Aquifer (0-25 Points)} \\
 &\quad = \\
 &\text{Natural Susceptibility of the Well (0-50 Points)}
 \end{aligned}$$

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings	
40-50 pts	Very High
30 to < 40 pts	High
20 to < 30 pts	Medium
< 20 pts	Low

Factors contributing to the susceptibility of the wellhead are: whether the sanitary seal is in place, protection from flooding, and if the well casing is properly grouted.

The wellhead for the LDS Willow Chapel received a **Low** susceptibility rating. The most recent sanitary survey (6/20/2008) indicated that a sanitary seal is installed on the well and the land surface is sloped away from the well, but the well is not grouted according to DEC regulations. Sanitary seals prevent potential contaminants from entering the well while sloping of the land surface and grouting help to prevent potential contaminants from traveling down the outside of the well casing.

Factors contributing to the susceptibility of the aquifer are: whether the aquifer is confined or unconfined, whether the well is completed in unconsolidated or fractured bedrock, whether wells and bore holes are

penetrating the aquifer and, if applicable, the confining layer.

The LDS Willow Chapel system is assumed to draw water from unconfined aquifer, based on a nearby proxy well (PWSID 224769.001). It received a **High** susceptibility rating because of the assumed unconfined status, assumed high water table (16 feet bgs), and the presence of other wells within the protection area. These traits can allow contaminants to travel down to the aquifer with precipitation and runoff.

Table 2 summarizes the Susceptibility scores and ratings for the LDS Willow Chapel system.

Table 2. Susceptibility

	Score	Rating
Susceptibility of the Wellhead	5	Very High
Susceptibility of the Aquifer	18	High
Natural Susceptibility	23	Medium

Contaminant risks are derived from an evaluation of the routine sampling results of the water system and the presence of potential sources of contamination. Contaminant risks to a drinking water source depend on the type and distribution of contaminant sources. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings	
40-50 pts	Very High
30 to < 40 pts	High
20 to < 30 pts	Medium
< 20 pts	Low

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants for the LDS Willow Chapel system.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	12	Low
Nitrates and/or Nitrites	12	Low
Volatile Organic Chemicals	50	Very High

Finally, an overall vulnerability score is assigned for each water system by combining each of the

contaminant risk scores with the natural susceptibility score:

$$\begin{aligned}
 &\text{Natural Susceptibility (0-50 Points)} \\
 &+ \\
 &\text{Contaminant Risks (0-50 Points)} \\
 &= \\
 &\text{Vulnerability of the Drinking Water Source to} \\
 &\text{Contamination (0-100 Points)}
 \end{aligned}$$

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings	
80-100 pts	Very High
60 to < 80 pts	High
40 to < 60 pts	Medium
< 40 pts	Low

Table 4 contains the overall vulnerability scores (0-100) and ratings for each of the three categories of drinking water contaminants for the LDS Willow Chapel system. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	35	Low
Nitrates and/or Nitrites	35	Low
Volatile Organic Chemicals	75	High

Bacteria and Viruses

The contaminant risk for bacteria and viruses is **Low** with septic systems contributing to the risk to the drinking water well.

Coliforms (a bacteria) are found naturally in the environment and although they aren't necessarily a health threat, they are an indicator of other potentially harmful bacteria in the water, more specifically, fecal coliforms and E. coli, which only come from human and animal fecal waste. Harmful bacteria can cause diarrhea, cramps, nausea, headaches, or other symptoms (EPA, 2008).

Only a small amount of bacteria and viruses are required to endanger public health. Positive samples increase the overall vulnerability of the drinking water source, indicating that the source is susceptible to bacteria and virus contamination. Bacteria and viruses have not recently been detected during water sampling of the system at LDS Willow Chapel (data reviewed in April, 2008).

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Low**.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is **Low** with septic systems contributing to the risk to the drinking water well.

Nitrates and nitrites have not been detected during recent water sampling of the system at LDS Willow Chapel (data reviewed in April, 2008).

After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Low**.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is **Very High** with septic systems, heating oil tanks, a coal mining area, and a rail corridor contributing to the risk to the drinking water well.

The water system at LDS Willow Chapel has not recently been sampled for volatile organic chemicals (data reviewed in April, 2008).

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **High**.

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of LDS Willow Chapel to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of LDS Willow Chapel drinking water source.

REFERENCES

Alaska Department of Commerce, Community and Economic Development (ADCCED), Accessed 2009 [WWW document]. URL: http://www.commerce.state.ak.us/dca/commdb/CF_COMDB.htm


Freeze, R.A. and Cherry, J.A., 1979. Groundwater. Prentice-Hall, Englewood Cliffs, NJ.

United States Environmental Protection Agency (EPA), Accessed 2008 [WWW document]. URL: <http://www.epa.gov/safewater/contaminants/index.html>.




APPENDIX A

LDS Willow Chapel Drinking Water Protection Area Location Map (Map A)

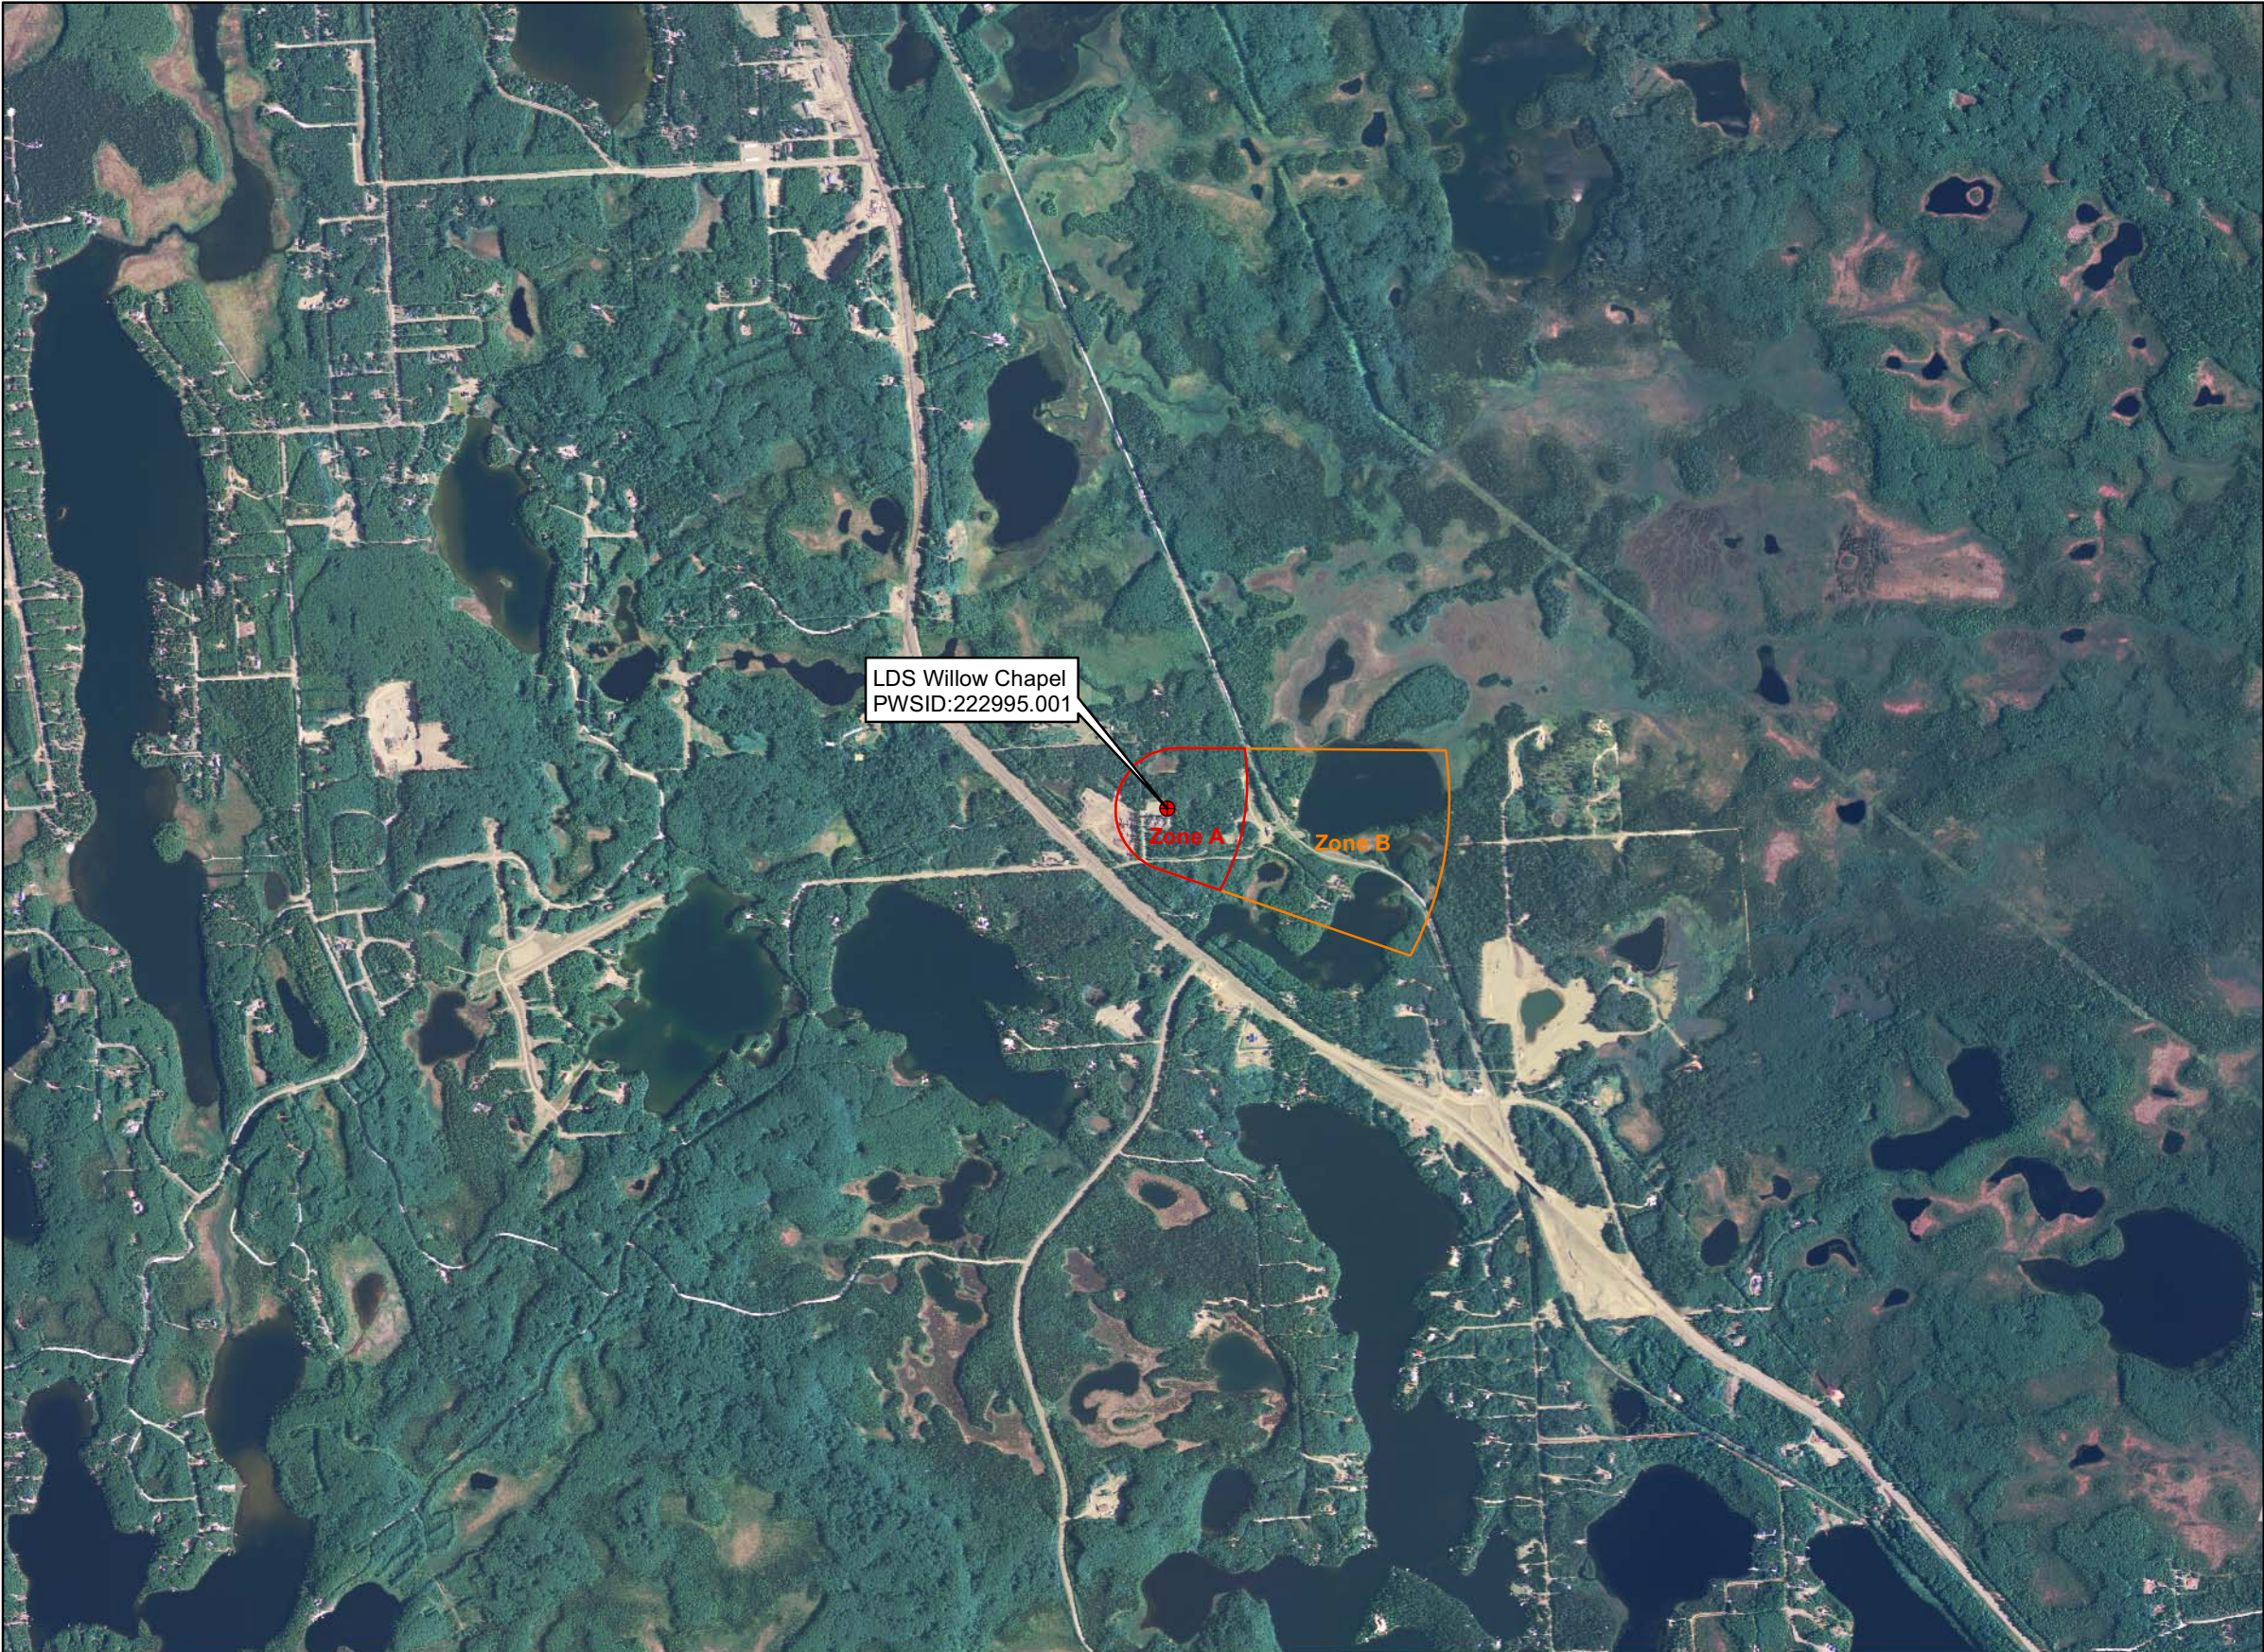Public Water Well System for PWS #222995.001 LDS Willow Chapel



Legend



-  Class B Public Water System Well
- Groundwater Protection Zones**
-  Zone A Protection Area - Several Months Travel Time
-  Zone B Protection Area - 2 Years Travel Time

Data Sources:
Contaminant Sources, Public Water System Wells, Alaska Department of Environmental Conservation (ADEC)

All other data:
Alaska Statewide Digital Mapping Initiative (SDMI)

Drinking Water Protection Areas based on "Alaska Drinking Water Protection Program - Guidance Manual for Class B Public Water Systems" published by ADEC

URS Corporation does not guarantee the accuracy or validity of the data provided.

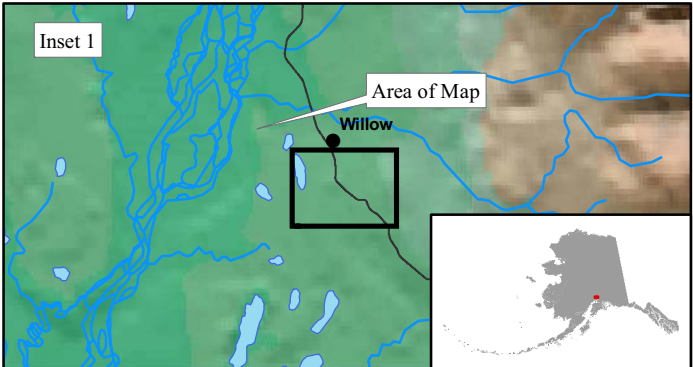

LDS Willow Chapel
PWS 222995.001

Appendix A Map A

APPENDIX B

Contaminant Source Inventory and Risk Ranking for LDS Willow Chapel (Tables 1-4)

Table 1

**Contaminant Source Inventory for
LDS WILLOW CHAPEL**

PWSID 222995.001

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Coal mining (active or inactive?)	E01	E01	A	C	
Septic systems (serves one single-family home)	R02	R02	A	C	1 assumed septic system
Tanks, heating oil, residential (above ground)	R08	R08	A	C	1 assumed heating oil tank
Coal mining (active or inactive?)	E01	E01	B	C	
Septic systems (serves one single-family home)	R02	R02	B	C	2 assumed septic systems
Tanks, heating oil, residential (above ground)	R08	R08	B	C	2 assumed heating oil tanks
Rail corridors	X30	X30	B	C	1 rail corridor

Table 2

*Contaminant Source Inventory and Risk Ranking for
LDS WILLOW CHAPEL
Sources of Bacteria and Viruses*

PWSID 222995.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Septic systems (serves one single-family home)	R02	R02	A	Low	C	1 assumed septic system
Septic systems (serves one single-family home)	R02	R02	B	Low	C	2 assumed septic systems

Table 3

*Contaminant Source Inventory and Risk Ranking for
LDS WILLOW CHAPEL
Sources of Nitrates/Nitrites*

PWSID 222995.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Septic systems (serves one single-family home)	R02	R02	A	Low	C	1 assumed septic system
Septic systems (serves one single-family home)	R02	R02	B	Low	C	2 assumed septic systems

Table 4

*Contaminant Source Inventory and Risk Ranking for
LDS WILLOW CHAPEL
Sources of Volatile Organic Chemicals*


PWSID 222995.001

<i>Contaminant Source Type</i>	<i>Contaminant Source ID</i>	<i>CS ID tag</i>	<i>Zone</i>	<i>Risk Ranking for Analysis</i>	<i>Map Number</i>	<i>Comments</i>
Coal mining (active or inactive?)	E01	E01	A	High	C	
Septic systems (serves one single-family home)	R02	R02	A	Low	C	1 assumed septic system
Tanks, heating oil, residential (above ground)	R08	R08	A	Medium	C	1 assumed heating oil tank
Coal mining (active or inactive?)	E01	E01	B	High	C	
Septic systems (serves one single-family home)	R02	R02	B	Low	C	2 assumed septic systems
Tanks, heating oil, residential (above ground)	R08	R08	B	Medium	C	2 assumed heating oil tanks
Rail corridors	X30	X30	B	Medium	C	1 rail corridor

APPENDIX C

LDS Willow Chapel Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map C)

**Public Water Well System for PWS # 222995.001 LDS Willow Chapel
Showing Potential and Existing Sources of Contamination**

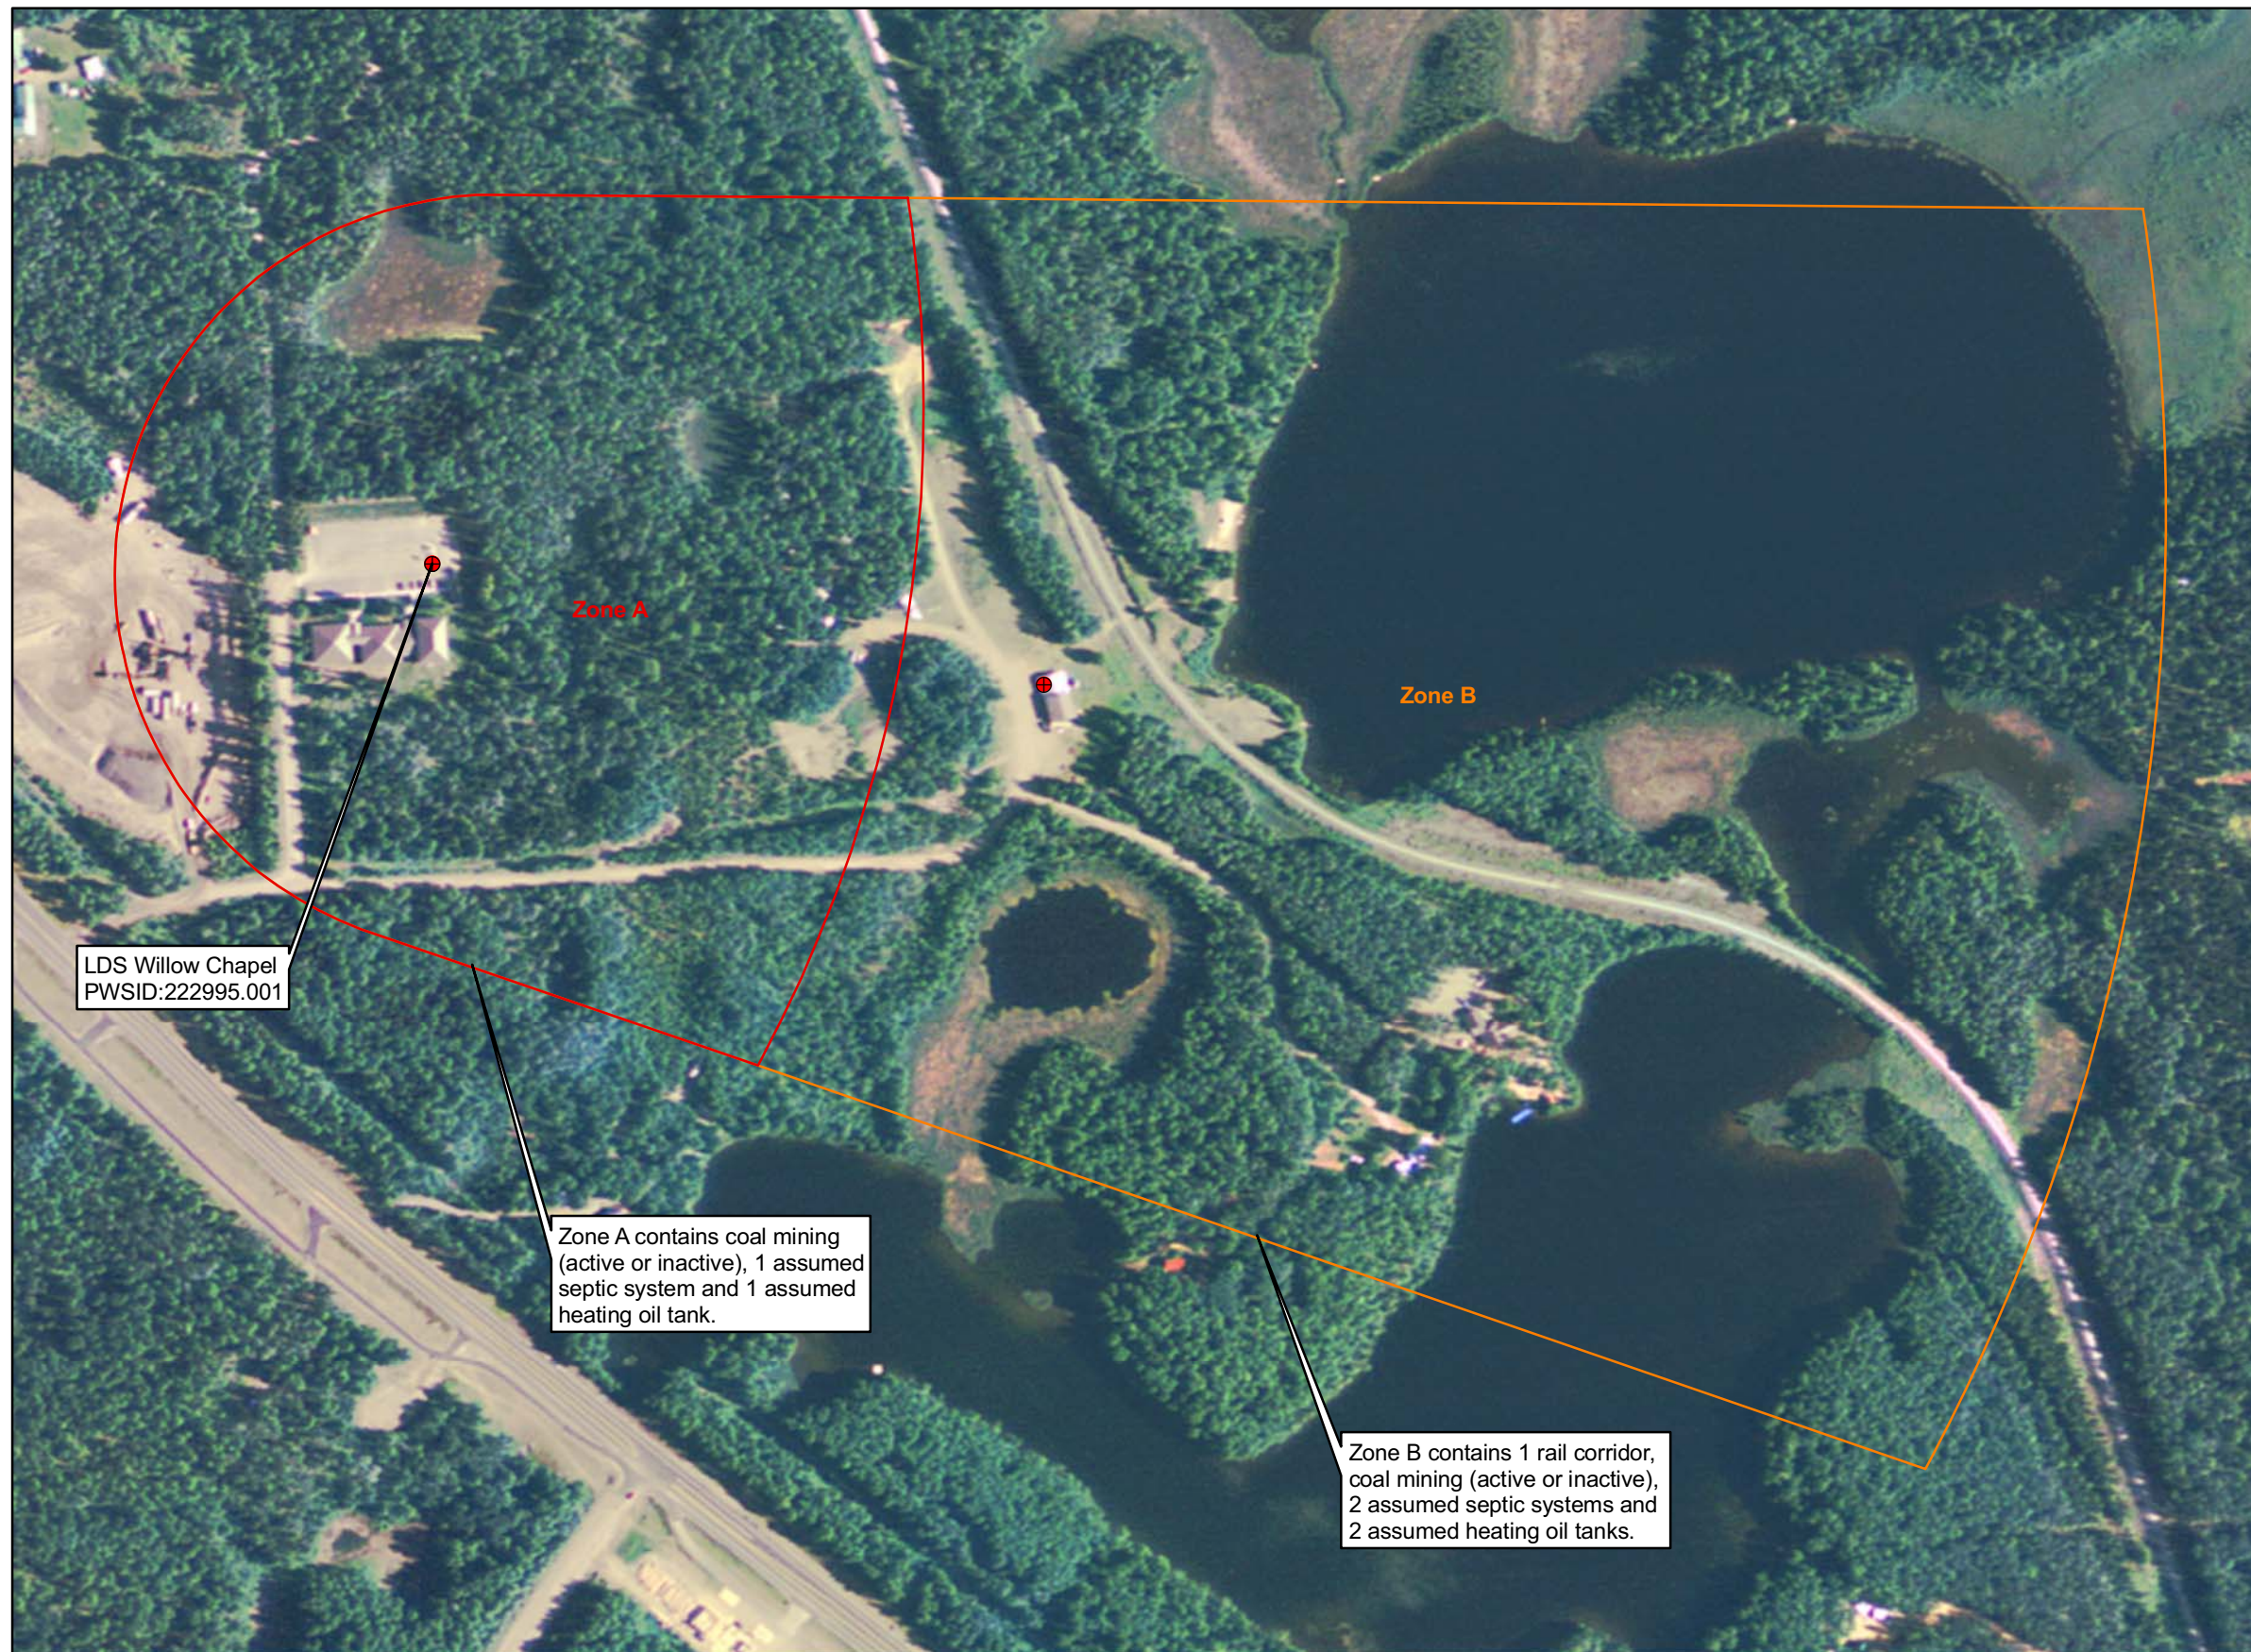

LDS Willow Chapel
PWSID:222995.001

Zone A contains coal mining (active or inactive), 1 assumed septic system and 1 assumed heating oil tank.

Zone B contains 1 rail corridor, coal mining (active or inactive), 2 assumed septic systems and 2 assumed heating oil tanks.

Legend

- Class B Public Water System Well
- Groundwater Protection Zones**
- Zone A Protection Area - Several Months Travel Time
- Zone B Protection Area - 2 Years Travel Time

Data Sources:
Contaminant Sources, Public Water System Wells, Alaska Department of Environmental Conservation (ADEC)

All other data:
Alaska Statewide Digital Mapping Initiative (SDMI)

Drinking Water Protection Areas based on "Alaska Drinking Water Protection Program - Guidance Manual for Class B Public Water Systems" published by ADEC

URS Corporation does not guarantee the accuracy or validity of the data provided.

