



## **Source Water Assessment**

A Hydrogeologic Susceptibility and Vulnerability Assessment for Diamond-M RV Park Drinking Water System, Soldotna, Alaska Diamond-M RV Park PWSID # 249701.001

April 2, 2003

DRINKING WATER PROTECTION PROGRAM REPORT 577
Alaska Department of Environmental Conservation

# Source Water Assessment for Diamond-M RV Park Drinking Water System Soldotna, Alaska Diamond-M RV Park PWSID# 249701.001

DRINKING WATER PROTECTION PROGRAM REPORT 577

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

#### **CONTENTS**

<b>EXECUTIVE SU</b>	JMN	MARY1	INVENTORY OF POTENTIAL AND EXISTING				
DIAMOND-M R	RV P	ARK PUBLIC DRINKING	CONTAMINANT SOURCES2				
WATER SYS	ГЕМ	[1	RANKING OF CONTAMINANT RISKS3				
DIAMOND-M R	RV P	ARK DRINKING WATER	VULNERABILITY OF THE DIAMOND-M RV				
PROTECTION	N AR	REA2	PARK DRINKING WATER SYSTEM3				
		TABI	LES				
Table 1. Definit	tion (	of Zones	2				
Table 2. Suscep	tibil	ity	3				
			4				
Table 4. Overal	1 Vu	Inerability	4				
		APPENI	DICES				
APPENDIX	A.	Diamond-M RV Park Drinking Water	r Protection Area (Map 1)				
	В.	Contaminant Source Inventory for Di	amond-M RV Park (Table 1)				
			isk Ranking for Diamond-M RV Park –				
		* * * * * * * * * * * * * * * * * * * *	isk Ranking for Diamond-M RV Park –				
	Contaminant Source Inventory and Risk Ranking for Diamond-M RV Park -						
		Volatile Organic Chemicals (Tal	JIC +)				
	C.	Diamond-M RV Park Drinking Water					
		and Existing Contaminant Source	es (Map 1)				
	D.	Vulnerability Analysis for Contamina	ant Source Inventory and Risk Ranking for				
Diamond-M RV Park Public Drinking Water Source (Charts 1 – 8)							

## Source Water Assessment for Diamond-M RV Park Source of Public Drinking Water, Soldotna, Alaska

## **Drinking Water Protection Program Alaska Department of Environmental Conservation**

#### **EXECUTIVE SUMMARY**

The public water system for the Diamond-M RV Park is a Class B (transient/non-community) water system consisting of one well. The Diamond-M RV Park is located north of Kalifornsky Beach Road at 48500 Diamond M Ranch Drive, Soldotna, Alaska. The wellhead received a susceptibility rating of Low and the aguifer received a susceptibility rating of Medium. Combining these two ratings produces a Low rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for the Diamond-M RV Park public drinking water source include: large capacity septic systems, residential septic systems, industrial process water disposal wells, nonresidential pit toilets, RV dump stations, campgrounds and RV parks, construction trade areas and materials, hardware stores, printers, publishers, copiers; meat processing, and highways and roads. These identified potential and existing sources of contamination are considered as sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water source for the Diamond-M RV Park received a vulnerability rating of **Medium** for bacteria and viruses, a High for nitrates and nitrites, and a Low for volatile organic chemicals.

## DIAMOND-M RV PARK PUBLIC DRINKING WATER SYSTEM

The Diamond-M RV Park public water system (PWS) is a Class B (transient/non-community) water system. The system consists of one well located at 48500 Diamond M Ranch Road, Soldotna, Alaska (T05N, R11W, Section 15) (See Map 1 of Appendix A). Soldotna is part of the Kenai Peninsula Borough, which is located directly south of the city of Anchorage (Please see the inset of Map 1 in Appendix A for location). The borough encompasses 25,600 square miles, of which only 15,700 square miles is land.

The Kenai Peninsula is broken into two distinct geographic areas; the Kenai Mountains and the Kenai Lowlands. Soldotna and its surrounding communities are located in the Kenai Lowlands.

Communities located within the Kenai Lowlands include Sterling, Soldotna, Kenai, Nikiski, Clam Gulch, Ninilchik, and Homer.

The Kenai Peninsula area topography varies from about 3,000 feet to 5,000 feet above sea level in the Kenai Mountains, the highest point being about 6,400 feet above sea level. The Kenai Peninsula is dotted with many lakes and small streams, including three large lakes (Kenai Lake, Skilak Lake, and Tustemena Lake) and two substantial rivers (Kenai River, and Kasilof River) (USGS 1915).

The Diamond-M RV Park water system is located within the Kenai Lowlands, which is a sub-province of the Cook Inlet-Susitna Lowland physiographic region. The Kenai Lowland is a glaciated coastal shelf situated west of the northeast-trending Kenai Mountains. Approximately 100 miles long, the coastal shelf is bordered on the west by Cook Inlet, on the east by Kenai Mountains, on the north by Turnagain Arm, and on the south by the Caribou Hills and Kachemak Bay. The following summary of regional geology and hydrogeology is based on studies by Bailey and Hogan (1995); Freethey and Scully (1980); Glass (1996); Hartman, et al. (1972); and Karlstrom (1964).

The Kenai Lowland is underlain by bedrock. Tertiary sedimentary bedrock is more than 500 feet below the city of Kenai airport, but is exposed along beach cliffs and road cuts near the southwest end of the lowland. Unconsolidated surficial deposits of Quaternary age include coastal deposits, glaciolacustrine deposits, glaciofluvial deposits, glacial moraine deposits, and periglacial wind deposits. Unconsolidated Quaternary cover on the lowlands generally thickens from south to North being thin or absent in the Homer area, and over 750 feet thick near Nikiski.

The most significant groundwater resources of the Kenai Lowlands are contained in Quarternary coarse-grained sands and gravels. Flood plain, river terrace and other alluvial deposits are common aquifer materials in the area, and are characterized by high rates of recharge, and large saturated thicknesses.

Other favorable materials include proglacial lake and associated river deposits and glacial outwash deposits consisting of meltwater sorted sand and gravel material. Unsorted flacial moraine and drift deposits generally have poor groundwater yields, as do discontinuous layers of confining clays and silt that are common throughout the unconsolidated materials. The relatively thicker sequence of unconsolidated sediments in the northern portions of the Kenai Lowlands locally hosts thicker, more extensive clay aquitards and multiple aquifers.

The Kenai Peninsula area has a central water system, however, many homes and businesses in the area rely on individual wells for their water supply. Most of these wells are deep with depths between 50 and 200 feet. Static water levels in many of these wells are between 10 and 30 feet below the surface. Although groundwater quality can vary significantly in short distance, groundwater supplies are abundant in the area.

According to the well log for the Diamond-M RV Park PWS, the depth of the well is 120 feet below ground surface (bgs), and is screened in a confined aquifer based on available well construction details. The thickness of the confining layer (blue clay) is approximately 51 feet. The well is screened in glacial outwash primarily composed of gravel, sand, and clay, and the static water level is approximately 30 feet bgs. The well is not located in a floodplain.

The Sanitary Survey (06/20/97) for the water system indicated that the land is sloped away from the well providing adequate surface water drainage. The well is not grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling down the annulus along the well casing and into source waters.

This system operates year round and serves up to 32 non-residents through one service connection.

## DIAMOND-M RV PARK DRINKING WATER PROTECTION AREA

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area (DWPA). Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts.

An analytical calculation was used to determine the size and shape of the DWPA for the Diamond-M RV Park. The input parameters describing the attributes of the aquifer in this calculation were adopted from Groundwater (*Freeze and Cherry 1979*). Available geology and groundwater contours were also considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time-of-travel for each:

**Table 1. Definition of Zones** 

Zone	Definition
A	<sup>1</sup> / <sub>4</sub> the distance for the 2-yr. time-of-travel
В	Less than the 2 year time-of-travel
C	Less Than the 5 year time-of-travel
D	Less than the 10 year time-of-travel

The DWPA for the Diamond-M RV Park was determined using an analytical calculation and includes Zone A, B, C, and D (See Map 1 of Appendix A).

## INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Diamond-M RV Park DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites;
- Volatile organic chemicals

The sources are displayed on Map 1 of Appendix C and summarized in Table 1 of Appendix B.

#### RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

• Low;

Medium;

• High; and

Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

## VULNERABILITY OF THE DIAMOND-M RV PARK DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by

looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Susceptibility Ratings								
40 to 50 pts	Very High							
30 to < 40 pts	High							
20 to < 30 pts	Medium							
< 20 pts	Low							

The well for Diamond-M RV Park is completed in a confined aquifer. Confined aquifers are less susceptible to potential groundwater quality impacts posed by the migration of surface water contaminants downward from the surface. Table 2 shows the Susceptibility scores and ratings for Diamond-M RV Park.

Table 2. Susceptibility

Low
Medium
Low
•

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Risk Ratings						
40 to 50 pts	Very High					
30 to < 40 pts	High					
20 to < 30 pts	Medium					
< 20 pts	Low					

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	40	Very High
Nitrates and/or Nitrites	50	Very High
Volatile Organic Chemical	ls 14	Low

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Natural Susceptibility (0 – 50 points)

+

Contaminant Risks (0 – 50 points)

=

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings						
80 to 100 pts	Very High					
60 to < 80 pts	High					
40 to < 60 pts	Medium					
< 40 pts	Low					

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of

drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	55	Medium
Nitrates and Nitrites	65	High
Volatile Organic Chemicals	30	Low

#### **Bacteria and Viruses**

The contaminant risk for bacteria and viruses is Very High. The risk is primarily attributed to the presence of a large-capacity septic system located in Zone A (See Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Only a small amount of bacteria and viruses are required to endanger public health. Bacteria and viruses have not been detected during recent water sampling of the system at Diamond-M RV Park. After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Medium**.

#### **Nitrates and Nitrites**

The contaminant risk for nitrates and nitrites is Very High. The high risk to this source of public drinking water is primarily attributed to the presence of large-capacity septic systems located in Zones A and D, an industrial process water disposal well in Zone D, and reported nitrate concentrations from recent sampling events (See Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). Nitrates are very mobile, moving at approximately the same rate as water.

Sampling history for the Diamond-M RV Park well indicates that nitrate concentrations were reported at 2.97 milligrams per liter (mg/L) in 2001. Nitrate concentrations in uncontaminated groundwater are typically less than 2 mg/L, therefore, nitrate concentrations above 2 mg/L may be indicative of man-made sources. The nitrate concentration from the most recent sampling event is 30% (2.97 mg/L) of the Maximum Contaminant Level (MCL) of 10 mg/L. The MCL is the maximum level of contaminant that is allowed to exist in drinking water and still be consumed by humans without harmful health effects. Though existing nitrate contamination was detected at the site, the levels detected are safe with respect to human health.

Nitrate levels are often derived from the decomposition of organic matter in soils. Although the nitrate source is unknown, such occurrences may be attributed to septic systems or other sources. After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to nitrate and nitrite contamination remains **High**.

#### **Volatile Organic Chemicals**

The contaminant risk for volatile organic chemicals is Low. The risk is primarily attributed to the presence of an industrial process water disposal well, a motor vehicle waste disposal well, and printers, copiers, and publishers located in Zone D (See Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

The drinking water at Diamond-M RV Park has not been sampled for volatile organic chemicals. After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination is **Low**.

#### REFERENCES

- Alaska Department of Community and Economic Development (ADCED), 2002 [WWW document]. URL http://www.dced.state.ak.us/mra/CF\_BLOCK.cfm.
- Alaska Department of Environmental Conservation, Contaminated Sites Database, 2003 [WWW database], URL <a href="http://www.state.ak.us/dec/dspar/csites/cs\_search.htm">http://www.state.ak.us/dec/dspar/csites/cs\_search.htm</a>
- Alaska Department of Environmental Conservation, Leaking Underground Storage Tank Database, 2003 [WWW database], URL <a href="http://www.dec.state.ak.us/spar/stp/ust/search/fac\_search.asp">http://www.dec.state.ak.us/spar/stp/ust/search/fac\_search.asp</a>
- Bailey, B.J., and Hogan, E.V., 1995Overview of environmental and hydrogeologic conditions near Kenai, Alaska. U.S. Geological Survey Open-File Report 95-410, 18 p.
- Freethey, G.W., and Scully, D.R. 1980 Water Resources of the Cook Inlet Basin, Alaska. U.S. Geological Survey Hydrologic Investigation Altas HA-620, prepared in cooperation with Alaska Water Study Committee, State of Alaska Department of Natural Resources, and Division of Geological and Geophysical Surveys.
- Freeze, R. A., and Cherry, J.A. 1979, Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey
- Glass, Roy, L. 1996 Groundwater Conditions and Quality in the Western Part of the Kenai Peninsula, Southcentral Alaska. U.S. Geological Survey Open File Report 94-466, prepared in cooperation with the Alaska Department of Natural Resources, Kenai Peninsula Borough, and Kenai Soil and Water Conservation District.
- Hartman, D.C., Pessel, G.H., and McGee, D.I., 1972 Kenai Group of Cook Inlet Basin, Alaska: State of Alaska. Open File Report #49, Department of Natural Resources Division of Geological and Geophysical Surveys, 5p.
- Karlstrom, T.N.V. 1964 Quaternary geology of the Kenai Lowland and glacial history of the Cook Inlet region, Alaska. U.S. Geological Survey Professional Paper 443, 64 p.
- Kenai River Watershed, 2002 [WWW document]. URL <a href="http://www.kenai-watershed.org/spawning/kenai\_river/kenai\_river.html">http://www.kenai-watershed.org/spawning/kenai\_river/kenai\_river.html</a>.
- Martin, G.C., Johnson, B.L., and Grant, 1915, Geology and mineral resources of Kenai Peninsula, Alaska: US Geological Survey Bulletin 587, 243 p., maps.
- United States Environmental Protection Agency (EPA), 2002 [WWW document]. URL <a href="http://www.epa.gov/safewater/mcl.html">http://www.epa.gov/safewater/mcl.html</a>.

## **APPENDIX A**

# Diamond-M RV Park Drinking Water Protection Area Location Map (Map 1)

## Drinking Water Protection Areas for the Public Water Well System for PWS #249701.001 Diamond M RV Park **LEGEND** Public Water System Well **Groundwater Protection Zones** Zone A – Several Months Travel Time Zone B – Less Than 2 Years Travel Time Zone C – Less Than 5 Years Travel Time Zone D – Less Than 10 Years Travel Time Hydrography/Physical Parcels Stream Lake or Pond Contours (50 ft.) **Transportation** ----- Roads Diamond M RV Park PWS 249701.001 KWHQ-FM (Kenai) Data Sources: Contaminant Sources, Public Water System Wells, Contours Alaska Department of Environmental Conservation (ADEC) Parcels Kenai Peninsula Borough Zone D All other data United States Geological Survey (USGS) Drinking Water Protection Areas based on ADEC Calculation Spreadsheet. URS Corporation does not guarantee the accuracy or validity of the data provided. UNKNOWN Inset 1 Area of Map 1 PWS 249701.001 Diamond M RV Park Appendix A Map 1 1,875 3,750 7,500 11,250 15,000

### **APPENDIX B**

## Contaminant Source Inventory and Risk Ranking for Diamond-M RV Park (Tables 1-4)

#### Contaminant Source Inventory for Diamond-M RV Park

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	1	
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-01	A	1	
RV dump stations	D18	D18-01	A	1	
Residential Areas	R01	R01-01	A	1	0.18 acres of residential area in Zone A
Campgrounds and RV Parks	X35	X35-01	A	1	
Residential Areas	R01	R01-02	В	1	17.12 acres of residential area in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	1	1 single-family septic system in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-01	В	1	Grant Avenue
Residential Areas	R01	R01-03	C	1	29.4 acres of residential area in Zone C
Septic systems (serves one single-family home)	R02	R02-02	C	1	28 single-family septic systems in Zone C
Highways and roads, paved (cement or asphalt)	X20	X20-02	С	1	8 Highways/paved roads in Zone C
Construction trade areas and materials	C09	C09-01	D	1	Big G Electric and Engineering
Hardware stores	C17	C17-01	D	1	Jensen's Maytag Home Appliance
Printers, publishers, copiers	C37	C37-01	D	1	Copyworks
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-02	D	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-03	D	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-04	D	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-05	D	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-06	D	1	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-01	D	1	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-01	D	1	

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Meat processing	N05	N05-01	D	1	Echo Lake's Superior Meats
Residential Areas	R01	R01-04	D	1	119.98 acres of residential area in Zone D
Septic systems (serves one single-family home)	R02	R02-03	D	1	50 single-family septic systems in Zone D
Highways and roads, paved (cement or asphalt)	X20	X20-03	D	1	14 Highways/paved roads in Zone D

#### Contaminant Source Inventory and Risk Ranking for Diamond-M RV Park Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	High	1	
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-01	A	Low	1	
RV dump stations	D18	D18-01	A	Low	1	
Residential Areas	R01	R01-01	A	Low	1	0.18 acres of residential area in Zone A
Campgrounds and RV Parks	X35	X35-01	A	Low	1	
Residential Areas	R01	R01-02	В	Low	1	17.12 acres of residential area in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	Low	1	1 single-family septic system in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-01	В	Low	1	Grant Avenue
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-02	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-03	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-04	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-05	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-06	D	High	1	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-01	D	High	1	

#### Contaminant Source Inventory and Risk Ranking for Diamond-M RV Park Sources of Nitrates/Nitrites

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	High	1	
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-01	A	Low	1	
RV dump stations	D18	D18-01	A	Low	1	
Residential Areas	R01	R01-01	A	Low	1	0.18 acres of residential area in Zone A
Campgrounds and RV Parks	X35	X35-01	A	Low	1	
Residential Areas	R01	R01-02	В	Low	1	17.12 acres of residential area in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	Low	1	1 single-family septic system in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-01	В	Low	1	Grant Avenue
Residential Areas	R01	R01-03	С	Low	1	29.4 acres of residential area in Zone C
Septic systems (serves one single-family home)	R02	R02-02	С	Low	1	28 single-family septic systems in Zone C
Highways and roads, paved (cement or asphalt)	X20	X20-02	С	Low	1	8 Highways/paved roads in Zone C
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-02	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-03	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-04	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-05	D	High	1	
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-06	D	High	1	
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-01	D	High	1	


#### Contaminant Source Inventory and Risk Ranking for Diamond-M RV Park Sources of Volatile Organic Chemicals

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Injection wells (Class V) Large-Capacity Septic System (Drainfield Disposal Method)	D10	D10-01	A	Low	1	
RV dump stations	D18	D18-01	A	Low	1	
Residential Areas	R01	R01-01	A	Low	1	0.18 acres of residential area in Zone A
Campgrounds and RV Parks	X35	X35-01	A	Low	1	
Residential Areas	R01	R01-02	В	Low	1	17.12 acres of residential area in Zone B
Septic systems (serves one single-family home)	R02	R02-01	В	Low	1	1 single-family septic system in Zone B
Highways and roads, paved (cement or asphalt)	X20	X20-01	В	Low	1	Grant Avenue
Residential Areas	R01	R01-03	С	Low	1	29.4 acres of residential area in Zone C
Septic systems (serves one single-family home)	R02	R02-02	С	Low	1	28 single-family septic systems in Zone C
Highways and roads, paved (cement or asphalt)	X20	X20-02	С	Low	1	8 Highways/paved roads in Zone C
Printers, publishers, copiers	C37	C37-01	D	High	1	Copyworks
Injection wells (Class V) Industrial Process Water & Water Disposal Wells	D40	D40-01	D	High	1	
Injection wells (Class V) Motor Vehicle Waste Disposal Well	D42	D42-01	D	High	1	

## **APPENDIX C**

Diamond-M RV Park
Drinking Water Protection Area
and Potential and Existing Contaminant Sources
(Map 1)

# Drinking Water Protection Areas for the Public Water Well System for PWS #249701.001 Diamond M RV Park Showing Potential and Existing Sources of Contamination

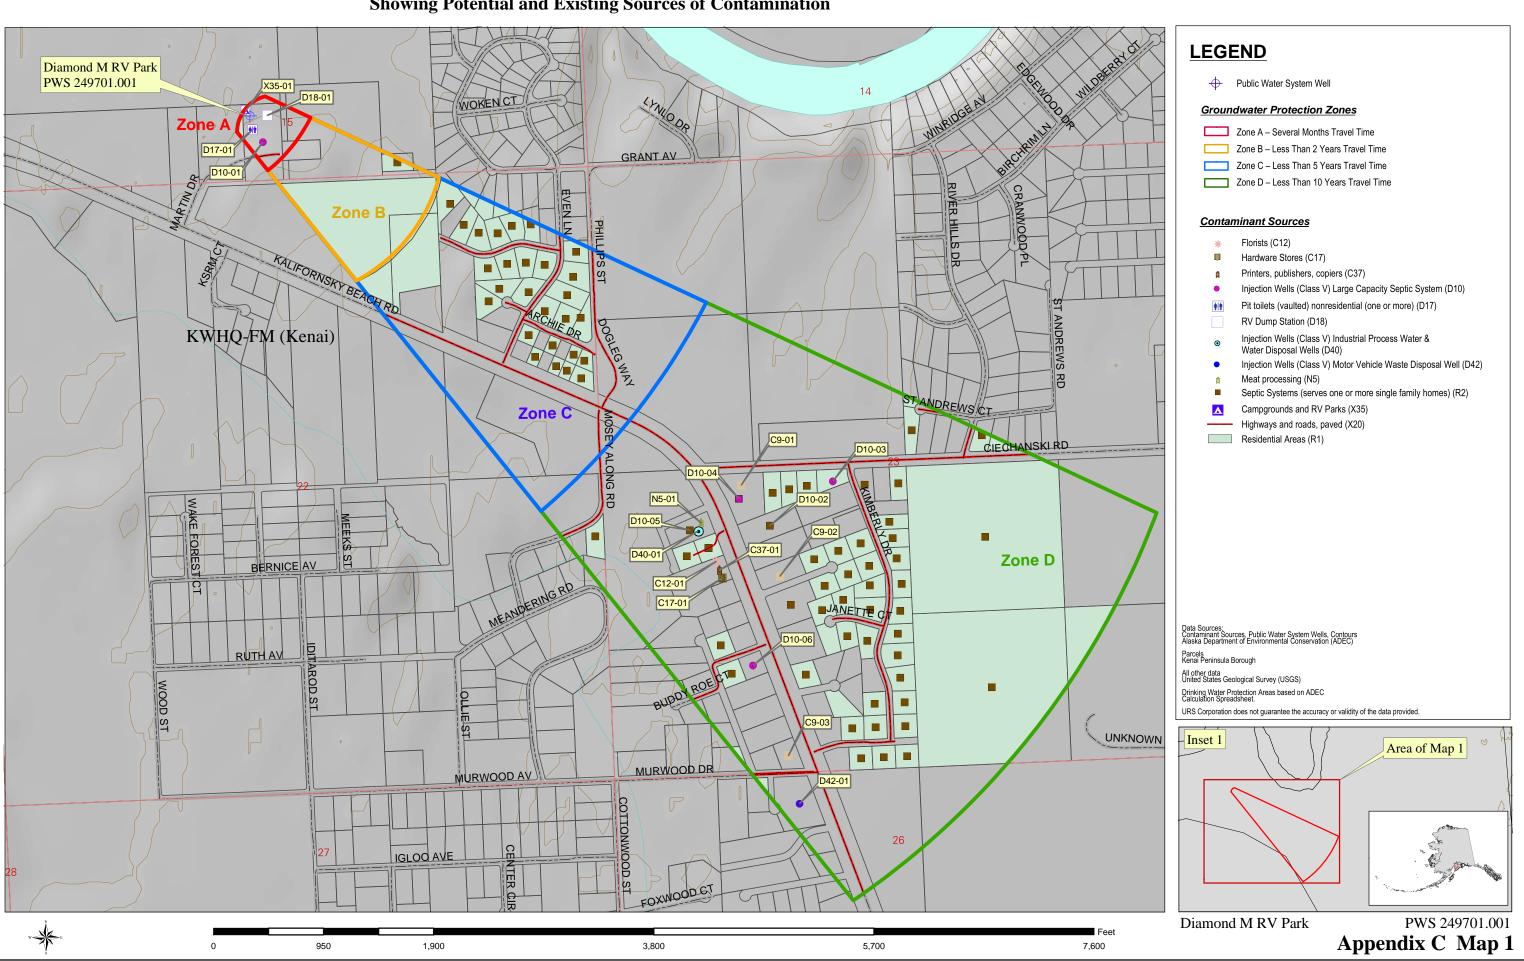

### **APPENDIX D**

# Vulnerability Analysis for Diamond-M RV Park Public Drinking Water Source (Charts 1-8)

Chart 1. Susceptibility of the wellhead - Diamond-M RV Park (249701.001) Susceptibility initially assumed to be low. Susceptibility of wellhead = 0 ptsNO Is the well Increase susceptibility 5 pts + 5 pts properly grouted? Is the well Increase susceptibility 20 pts + 0 pts capped? YES YES Susceptibility of wellhead Low 5 pts YES Increase susceptibility: Is the well 10 pts: suspected floodplain 0 pts within a Wellhead Susceptibility Ratings floodplain? 20 pts: known floodplain 20 to 25 pts very high 15 to < 20 pts high 10 to < 15 pts medium NO < 10 pts Is the land surface sloped Increase susceptibility 5 pts 0 pts away from the well?

Page 1 of 13

Chart 2. Susceptibility of the aquifer - Diamond-M RV Park (249701.001)

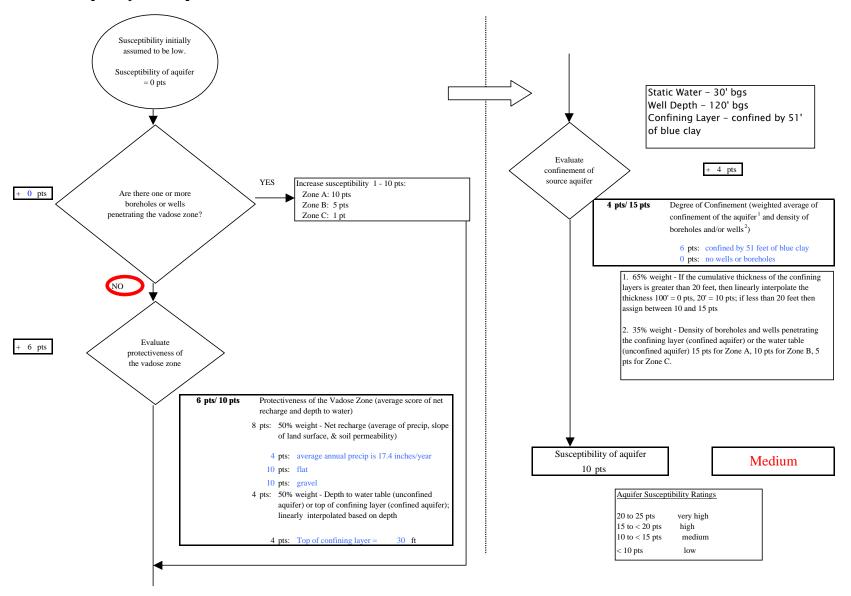


Chart 3. Contaminant risks for Diamond-M RV Park (249701.001) - Bacteria & Viruses

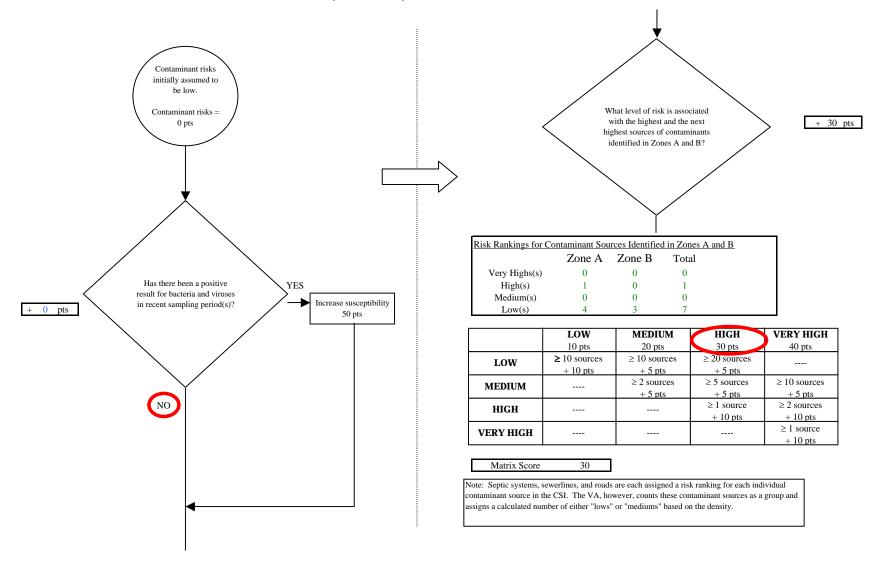


Chart 3. Contaminant risks for Diamond-M RV Park (249701.001) - Bacteria & Viruses Initial assessment of risk posed by Are there sufficient Risk unchanged controls, conditions, or potential sources of contamination monitoring to warrant = 30 pts downgrading risk? Are any YES significant contaminant Risk unchanged Reduce risk 1 - 10 pts sources within 0 pts Zone A? The number of contaminant sources in Risk posed by potential sources of Zone A determines a YES contamination with controls risk increase. See Table 2 for inventory. Increase risk 1 - 10 pts + 10 pts Existing Risk due to existing 0 pts contamination Are there any NQ conditions that Risk unchanged Risk posed by potential sources warrant upgrading Potential Potential of contamination with controls risk? 40 pts Contaminant risks Contaminant Risk YES 40 pts Increase risk 1 - 10 pts + 0 pts Contaminant risks\* \* Truncate risk at 50 pts 40 Contaminant Risk Ratings Risk posed by potential sources of contamination 40 to 50 pts very high 30 to < 40 ptshigh Very High 20 to < 30 pts

Page 4 of 13

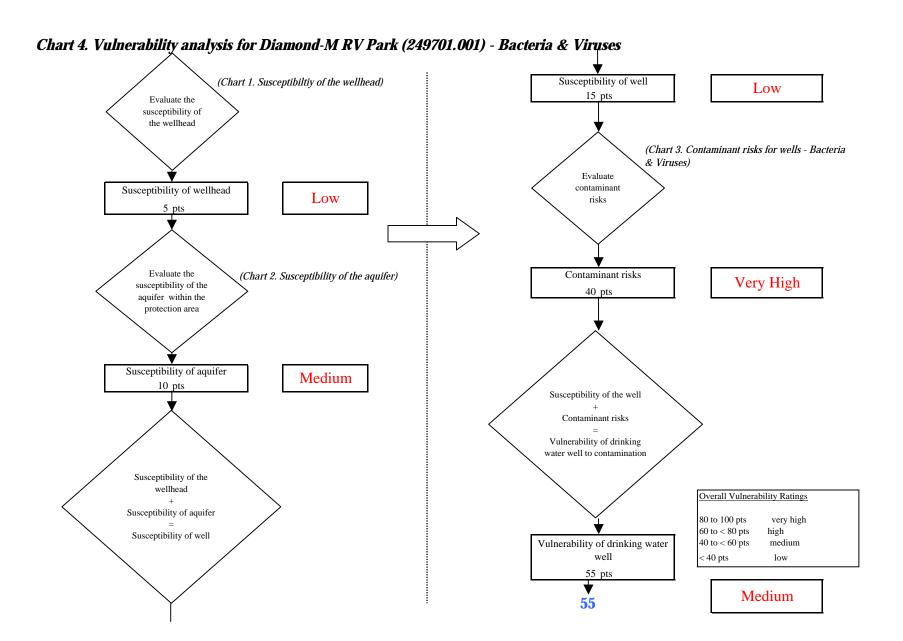
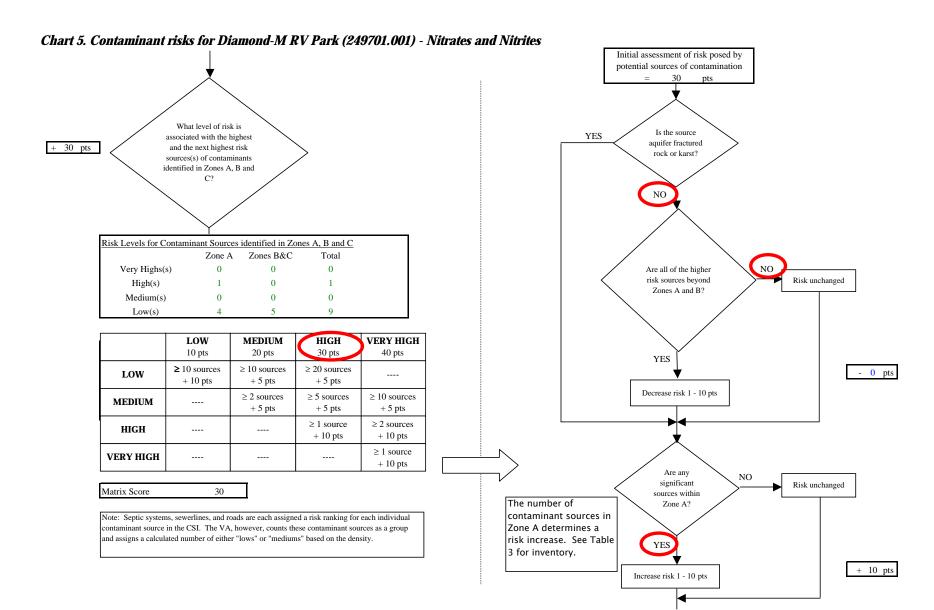


Chart 5. Contaminant risks for Diamond-M RV Park (249701.001) - Nitrates and Nitrites Contaminant risks initially assumed to be low. Current level of Evaluate the level of Contaminant risks contamination due to manbackground = 0 ptscontamination from made source(s) natural sources 50 pts NO or Is the concentration of Has nitrates and/or UNKNOWN the contaminant nitrites been detected in increasing, decreasing, the source waters in or staying the same? recent sampling period(s)? Recent Nitrate Sampling Results (mg/L) 4/16/2001 2.97 4/19/2000 ND Increasing: risk up 1 - 10 pts YES Decreasing: risk down 1 - 5 pts + 0 pts Same: risk unchanged Maximum Contaminant Contamination is Level (MCL) = 10 mg/Lassumed to be man-Detected Nitrate Level = made due to level exceeding 20% and Existing contamination points based on Risk due to existing man-Risk due to natural proximity to high linear interpolation of most recent detect made sources sources volume septic system [MCL = 50 pts; detect = 0 pts]0 pts 50 pts Risk due to existing contamination 50 pts Was the source of Evaluate the level of NO. contamination contamination from natural? man-made sources YES



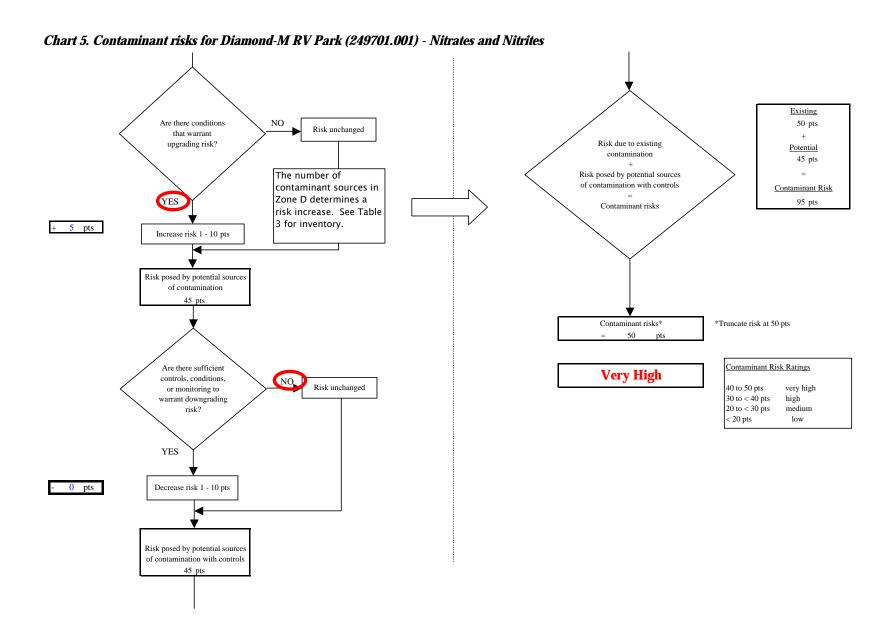


Chart 6. Vulnerability analysis for Diamond-M RV Park (249701.001) - Nitrates and Nitrites (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Low 15 pts Evaluate the susceptibility of the wellhead (Chart 5. Contaminant risks for wells - Nitrates and Nitrites) Evaluate contaminant Susceptibility of wellhead Low risks 5 pts Evaluate the Contaminant risks (Chart 2. Susceptibility of the aquifer) Very High susceptibility of the 50 pts aquifer within the protection area Susceptibility of aquifer Medium Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well Vulnerability of drinking water 40 to < 60 pts medium

Page 9 of 13


well


65 pts


**65** 

< 40 pts

High

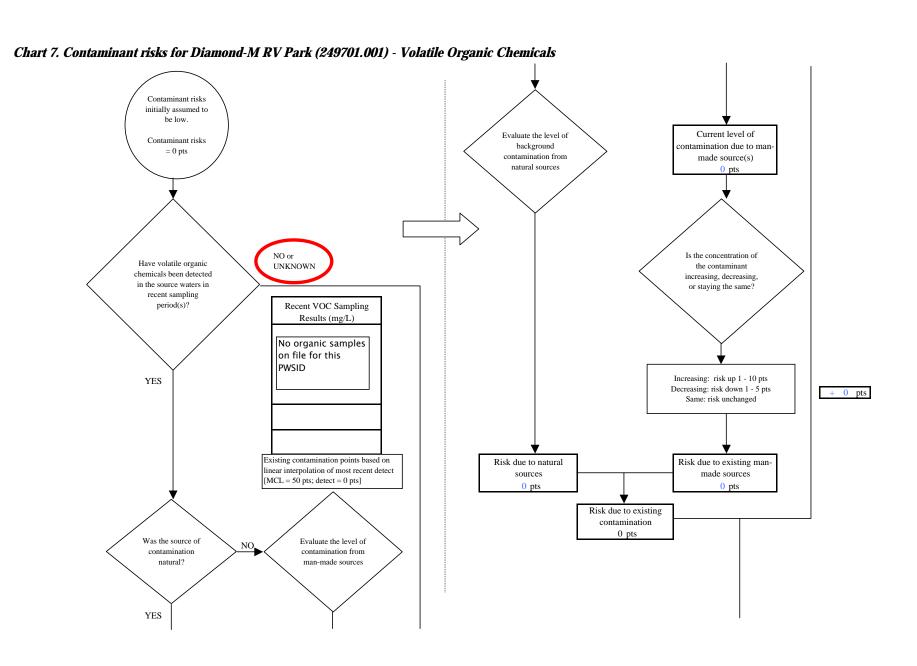

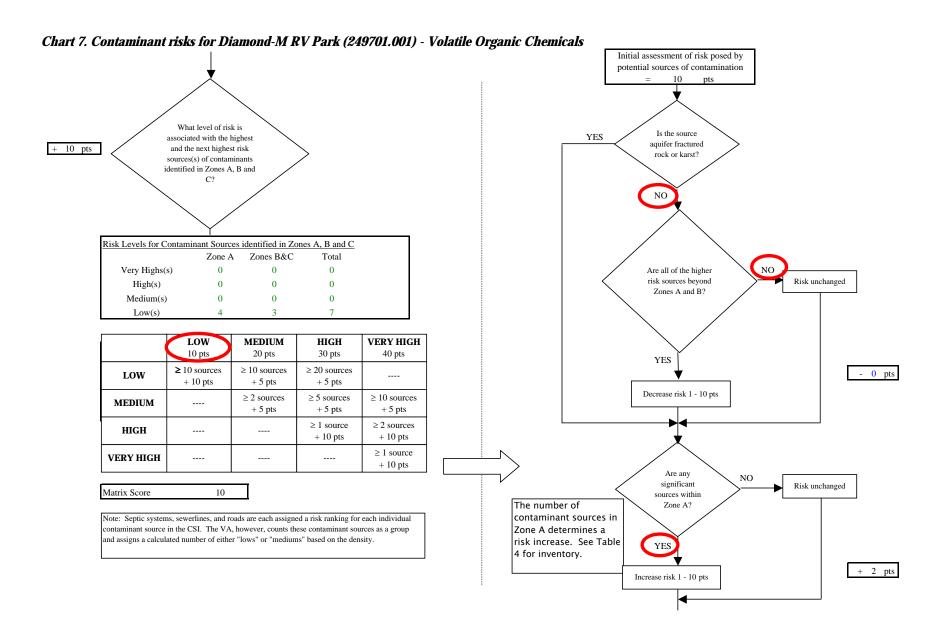

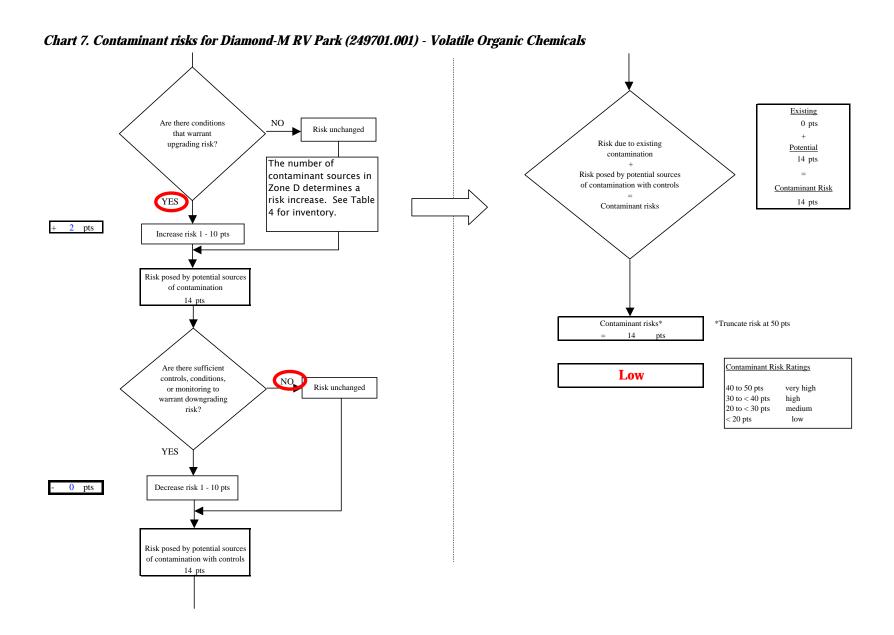

Page 12 of 13

Chart 8. Vulnerability analysis for Diamond-M RV Park (249701.001) - Volatile Organic Chemicals (Chart 1. Susceptibiltiy of the wellhead) Susceptibility of well Low 15 pts Evaluate the susceptibility of the wellhead (Chart 7. Contaminant risks for wells - Volatile Organic Chemicals) Evaluate contaminant Susceptibility of wellhead Low risks 5 pts Evaluate the Contaminant risks (Chart 2. Susceptibility of the aquifer) Low susceptibility of the 14 pts aquifer within the protection area Susceptibility of aquifer Medium Susceptibility of the well Contaminant risks Vulnerability of drinking water well to contamination Susceptibility of the wellhead Overall Vulnerability Ratings Susceptibility of aquifer 80 to 100 pts very high 60 to < 80 pts high Susceptibility of well Vulnerability of drinking water 40 to < 60 pts medium

Page 13 of 13

well

29 pts

**30** 

< 40 pts

Low