



Source Water Assessment

A Hydrogeologic Susceptibility and
Vulnerability Assessment for
Alyeska Valdez Marine Terminal – West
Valdez

PWSID # 291944.001

January 2004

Drinking Water Protection Program Report #1303 Alaska Department of Environmental Conservation

Source Water Assessment for the

Alyeska Valdez Marine Terminal – West Valdez

PWSID# 291944.001

January 2004

Drinking Water Protection Program Report #1303

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

			Page
SECTION	Drin Alye Inver Rank Vuln	king Water System And Area Overview ska VMT - West Drinking Water Protection Area intory of Potential and Existing Contaminant Sources ting of Contaminant Risks erability of the Drinking Water System rences	1 1 1 2 2 2 2 7
		TABLES	
TABLE	2. 3. 3.	Definition of Zones Susceptibility of the Water Source Contaminant Risks Overall Vulnerability	2 3 3 3
		APPENDICES	
APPENDIX	A.	Alyeska VMT - West Drinking Water Protection Area (Map 1)	
	B.	Contaminant Source Inventory and Risk Rankings (Table 1)	
	C.	Alyeska VMT - West Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map 2)	
	D.	Vulnerability Analysis and Contaminant Risks (Charts $1-13$)	

Source Water Assessment for the Alyeska VMT (West) Water System – Allison Creek Intake

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The Alyeska Valdez Marine Terminal (VMT) has two water system intakes that are both classified as Class A (non-transient, non-community) water systems. Both intakes (named VMT- West and VMT- East) obtain water from Allison Creek, which flows into Port Valdez immediately east of the terminal buildings. Both intakes are located approximately 750-feet upstream from the mouth of the creek and are accessible via road. The overall protection areas for both intakes are identical in size (8.4 square miles) and received a susceptibility rating of "very high". A rating of high to very high is typical for all systems with surface water intakes. Potential and existing sources of the following contaminants were evaluated for the Source Water Assessment: bacteria and viruses, nitrates and/or nitrites, heavy metals, cyanide, and other inorganic chemicals, synthetic organic chemicals, volatile organic chemicals, and other organic chemicals. No existing or potential sources of contaminants were identified for the drinking water source. This evaluation included all available water sampling data submitted to ADEC by the system operator. The samples may have been collected from either raw water or post-treated water. Combining the susceptibility of the surface water source with the contaminant risks, this water system has received a vulnerability rating of "medium" for all contaminant categories. This assessment can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the Alyeska Pipeline Service Company to protect public health.

DRINKING WATER SYSTEM AND AREA OVERVIEW

The Alyeska Valdez Marine Terminal (VMT) is located on the south side of Port Valdez, south of the Valdez town site. It lies 305 road miles east of Anchorage, and 364 road miles south of Fairbanks. It is the southern terminus of the Trans-Alaska oil pipeline (Please see the inset of Map 1 in Appendix A for location). The system serves approximately 350 people. The intake collects water from Allison Creek, which flows into Port Valdez immediately east of the terminal buildings. The intake is located approximately 750-feet upstream from the mouth of the creek and is accessible via road

(See Map 1 of Appendix A). Access to the Terminal area is restricted.

January temperatures range from 21 to 30; July temperatures are 46 to 61. Annual precipitation is 62 inches. The average snowfall is, incredibly, 325 inches (27 feet) annually (ADCED, 2003).

Recent Sanitary Survey information indicates that the intake is screened, maintained, and inspected regularly. The survey also indicates that the intake is protected from ice buildup and siltation. System operators indicated that peak flow for Allison Creek in the summer is approximately 250-cfs and peak flow in the winter is approximately 10-cfs. Flow rates will be variable, depending on precipitation event intensity.

ALYESKA VMT - WEST DRINKING WATER PROTECTION AREA

Identifying the pathways most likely for surface contamination to reach water intake areas is the first step in determining the water system's risk. These are initially determined by looking at the drainage area contributing overland water flow to a surface water source intake. The entire drainage area is also known as the "drinking water protection area". Please refer to pages 10-11of the "Guidance Manual for Class A Public Water Systems" for additional information.

The protection area established for surface water sources by the ADEC is usually separated into three zones, limited by the watershed boundary. These zones correspond to the overland-flow distance that water travels to get to the source. The ADEC Drinking Water Protection Program's Technical Advisory Committee developed guidelines for derivation of these zones in 1998. The following is a summary of the three protection area zones:

Table 1. Definition of Zones

Zone	Definition
A	Areas within 1000-ft of lakes or streams
В	Areas within 1-mile of lakes or streams
C	The watershed boundary

The protection area for the Alyeska VMT - West water intake includes each of these Zones (See Map 1 of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Alyeska VMT - West protection area. This inventory was completed through a search of agency records and other publicly available information. There is a wide array of potential contamination sources to surface water. These contaminants are found within agricultural, residential, commercial, and industrial areas, but *can also occur within areas that have little or no development*.

For Class A public water system assessments, six categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites;
- Volatile organic chemicals;
- Heavy metals, cyanide, and other inorganic chemicals;
- Synthetic Organic Chemicals; and
- Other Organic Chemicals.

Sources identified in the protection area are displayed on Map 2 of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once potential and existing sources of contamination have been identified, they are assigned a ranking according to what category and level of risk they represent. Ranking of contaminant risks for "potential" or "existing" sources of contamination is a function of the toxicity and the volume of specific contaminants associated with that source. Rankings include:

- Low:
- Medium:
- High; and
- Very High.

The time-of-travel for contaminants within the water is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zone A because of their short life span. Only "Very High" and "High" rankings are inventoried within Zones B and C due to the probability of contaminant dilution by the time the contaminants reach the water intake.

The remaining tables in Appendix B (if necessary) contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, volatile organic chemicals, heavy metals, cyanide, and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals.

VULNERABILITY OF THE DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Surface Water Susceptibility; and
- Contaminant risks.

Appendix D contains 13 charts, which together form the 'Vulnerability Analysis' for the public drinking water Source Water Assessment. Chart 1 analyzes the 'Susceptibility of the Surface Water Source' to contamination by looking at the climate, terrain, and intake location. Chart 2 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the intake area. Chart 3 contains the 'Vulnerability Analysis for Bacteria and Viruses', which is a composite score of the Vulnerability Analysis and the overall Susceptibility. Charts 4 through 13 repeat the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites, volatile organic chemicals, heavy metals, cyanide, and other inorganic chemicals, synthetic organic chemicals, and other organic chemicals, respectively.

A score for the Surface Water Susceptibility of the source is reached by considering the properties of the water intake and the surrounding area. The derivation of this information is presented below and the data for this source is shown in Chart 1 of Appendix D.

Susceptibility of the Surface Water Source – always considered to be "high" (30 points)

+

Adequate Construction of the Intake (0-5 Points)

+

Runoff Potential Within Zone B (0 - 5 Points)

+

Dilution Capacity of the Surface Water (0 - 10 Points)

Natural Susceptibility (0 - 50 Points)

A ranking is assigned for the Surface Water Susceptibility according to the point score:

30 to < 40 pts

Surface Water Source Susceptibility Ratings
40 to 50 pts

Very High

High

Table 2. Susceptibility of the Water Source

	Score	Rating
Minimum Allowable	30	
Susceptibility		
Intake Construction	0	
Adequate		
Runoff Potential	5	
Dilution Capacity	10	
Overall Susceptibility	45	Very High

For contaminants, risks to a drinking water source depend on the type, number or density, and distribution of the contaminant sources. The Contaminant Risk score has been derived from an examination of existing, and historical contamination sources that have been detected in the protection area through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as the susceptibility:

Contaminant Risk Ratings					
40 to 50 pts	Very High				
30 to < 40 pts	High				
20 to < 30 pts	Medium				
< 20 pts	Low				

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category	Score	Rating
Bacteria and Viruses	0	Low
Nitrates and/or Nitrites	0	Low
Volatile Organic Chemicals	0	Low
Heavy Metals, Cyanide, and		
Other Inorganic Chemicals	0	Low
Synthetic Organic Chemicals	0	Low
Other Organic Chemicals	0	Low

Finally, an overall vulnerability score is assigned for each contaminant type by combining each of the contaminant risk scores with the susceptibility score:

Susceptibility of the Surface Water Source

$$(0-50 \text{ points})$$

+

Contaminant Risks (0 - 50 points)

=

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

Again, rankings are assigned according to a point score:

Overall Vulnerability Ratings					
80 to 100 pts	Very High				
60 to < 80 pts	High				
40 to < 60 pts	Medium				
< 40 pts	Low				

Table 4 contains the overall vulnerability scores and ratings for each of the six categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category	Score	Rating
Bacteria and Viruses	45	Medium
Nitrates and Nitrites Volatile Organic Chemicals	45 45	Medium Medium
Heavy Metals, Cyanide, and	15	Wicaram
Other Inorganic Chemicals	45	Medium
Synthetic Organic Chemicals		Medium
Other Organic Chemicals	45	Medium

Bacteria and Viruses

The contaminant risk for bacteria and viruses is "low". Typically, coliform detection in raw water samples collected from surface water sources is normal. (See Chart 2 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Coliforms (a bacteria) are found naturally in the environment and although they aren't necessarily a health threat, they are an indicator of other potentially harmful bacteria in the water, more specifically, fecal coliforms and E. coli which only come from human and animal fecal waste. Harmful bacteria can cause diarrhea, cramps, nausea, headaches, or other symptoms (EPA, 2003). Positive samples increase the overall vulnerability of the drinking water source, indicating that the source is susceptible to bacteria and virus contamination.

Positive bacteria results have not been recorded in samples taken from 1999-2003.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the source, the overall vulnerability of the source to bacteria and virus contamination is "medium".

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is "low" (See Chart 4 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). Nitrates are very mobile, moving at approximately the same rate as water.

Sampling history for the water source indicates that nitrates have been detected at levels below the MCL in samples collected in 1998 through 2003. The Maximum Contaminant Level (MCL) for nitrates is 10 milligrams per liter (mg/L). The MCL is the maximum level of contaminant that is allowed to exist in drinking water and still be consumed by humans without harmful health effects (EPA, 2003).

Possible sources of nitrates/nitrites could be from septic systems or human/animal activity along roads or trails located within the protection area.

After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the source, the overall vulnerability of the source to contamination is "medium".

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is "low" (See Chart 6 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

Chloroform and trihalomethanes were detected at levels below the MCL during sampling in 2002-2003, although both of these chemicals typically originate during the process of water treatment and not from the source waters. The MCL for chloroform is 0.2 milligrams per liter (mg/L) and the MCL for total trihalomethanes is 0.1 mg/L.

Possible sources of volatile organic chemicals could be from human/animal activity along roads or trails located within the protection area.

After combining the contaminant risk for volatile organic chemicals with the natural susceptibility of the source, the overall vulnerability of the source to contamination is "medium".

Heavy Metals, Cyanide, and Other Inorganic Chemicals

The contaminant risk for heavy metals is "low". Lead & copper have been detected in samples collected during 1999-2002 at levels below the MCL (See Chart 8 – Contaminant Risks for Heavy Metals, Cyanide, and Other Inorganic Chemicals in Appendix D). The MCL for copper is 1.3 mg/l. and the MCL for lead is 0.015 mg/l.

The most common source of these chemicals is the infrastructure of the distribution system following the treatment process and not from the source waters. Additional sources of heavy metals could be from activity along roads/trails located within the protection area.

After combining the contaminant risk for heavy metals with the natural susceptibility of the source, the overall vulnerability of the well to contamination is "medium".

Synthetic Organic Chemicals

The contaminant risk for synthetic organic chemicals is "low". After combining the contaminant risk with the natural susceptibility of the source, the overall vulnerability to synthetic organic chemicals of the source is "medium" (See Chart 11 – Contaminant Risks for Synthetic Organic Chemicals in Appendix D).

Possible sources of synthetic organic chemicals are from residential areas located within the protection area.

Other Organic Chemicals

The contaminant risk for other organic chemicals is "low". After combining the contaminant risk with the natural susceptibility of the source, the overall vulnerability to other organic chemicals of the source is "medium" (See Chart 13 – Contaminant Risks for Other Organic Chemicals in Appendix D).

A possible source of other organic chemicals could be from human/animal activity along trails located within the protection area.

Review of the historical sampling data indicates that no other organic chemicals have been sampled recently.

Using the Source Water Assessment

This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts as well as a basis for the continuous efforts on the part of the Alyeska Pipeline Service Company to protect public health. It is anticipated that Source Water Assessments will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of the drinking water source.


REFERENCES

 $A lask a \ Department \ of \ Community \ and \ Economic \ Development \ (ADCED), \ 2003 \ [WWW \ document]. \ URL \ http://www.dced.state.ak.us/cbd/commdb/CF_COMDB.htm$

United States Environmental Protection Agency (EPA), 2003 [WWW document]. URL http://www.epa.gov/safewater/mcl.html.

APPENDIX A

Alyeska VMT - West Drinking Water Protection Area Location Map (Map 1)

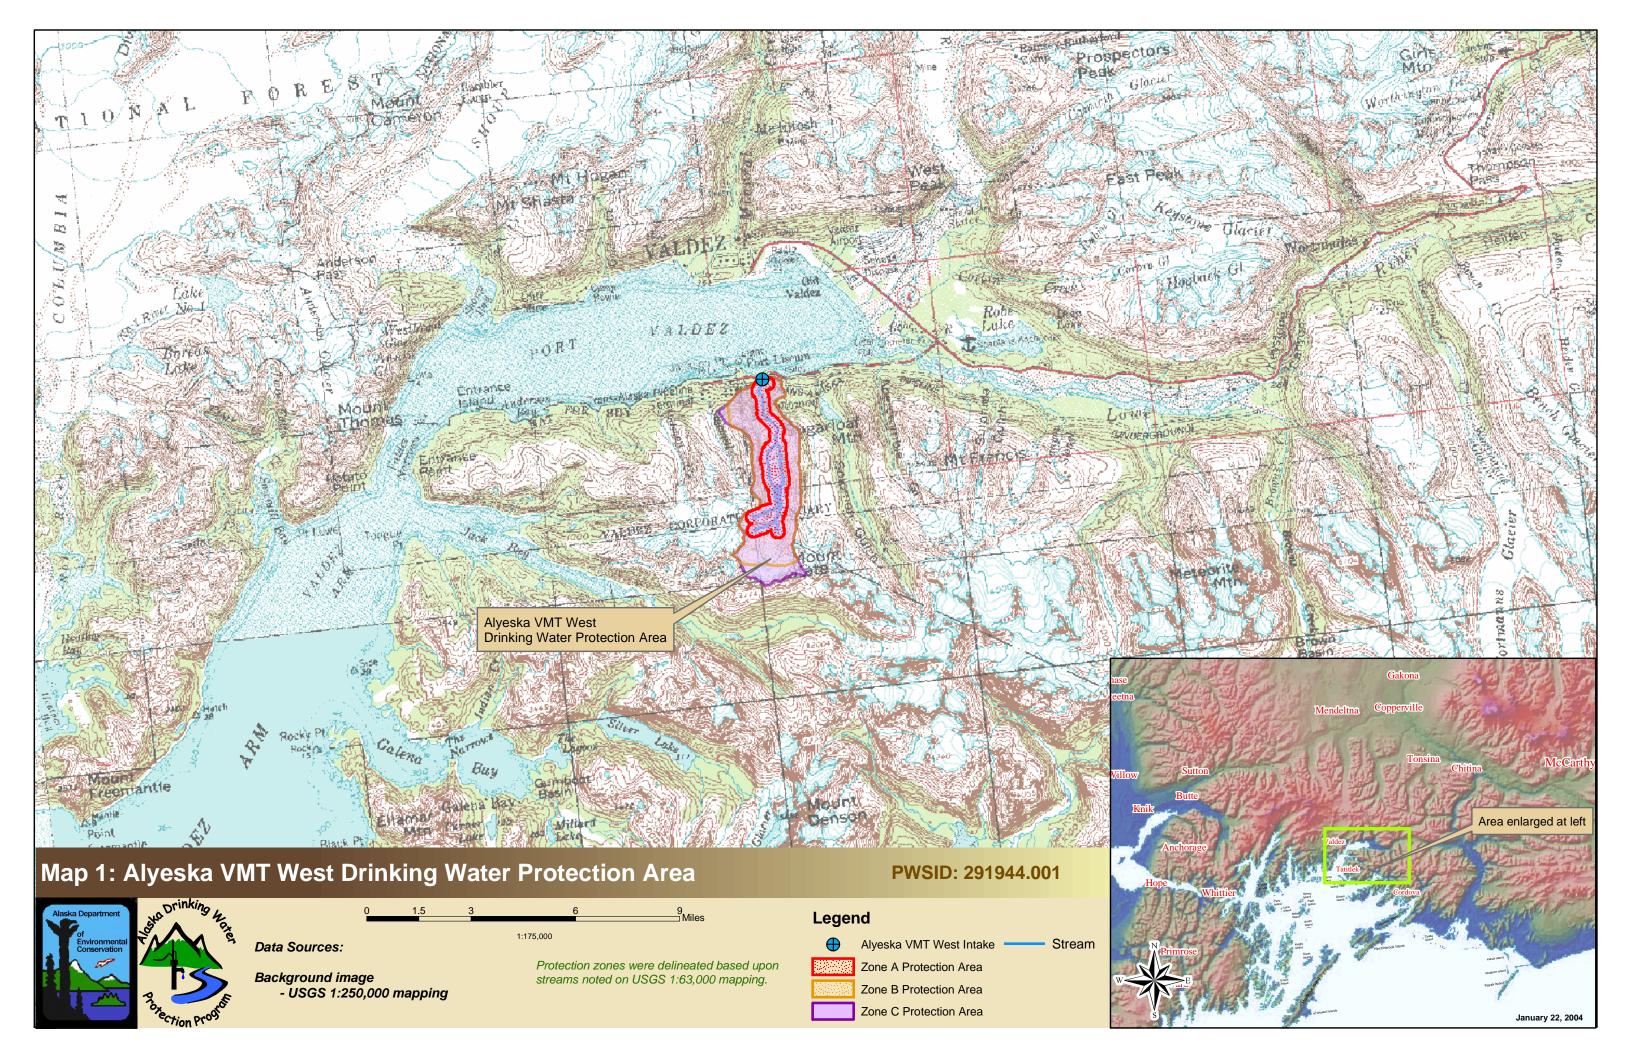

APPENDIX B

Contaminant Source Inventory and Risk Rankings (Table 1)


Table 1

Contaminant Source Inventory for Alyeska VMT West

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
				2	No reported sources of potential pollution in watershed. No human activity and minimal wildlife.


APPENDIX C


Alyeska VMT - West
Drinking Water Protection Area
and Potential and Existing Contaminant Sources
(Map 2)

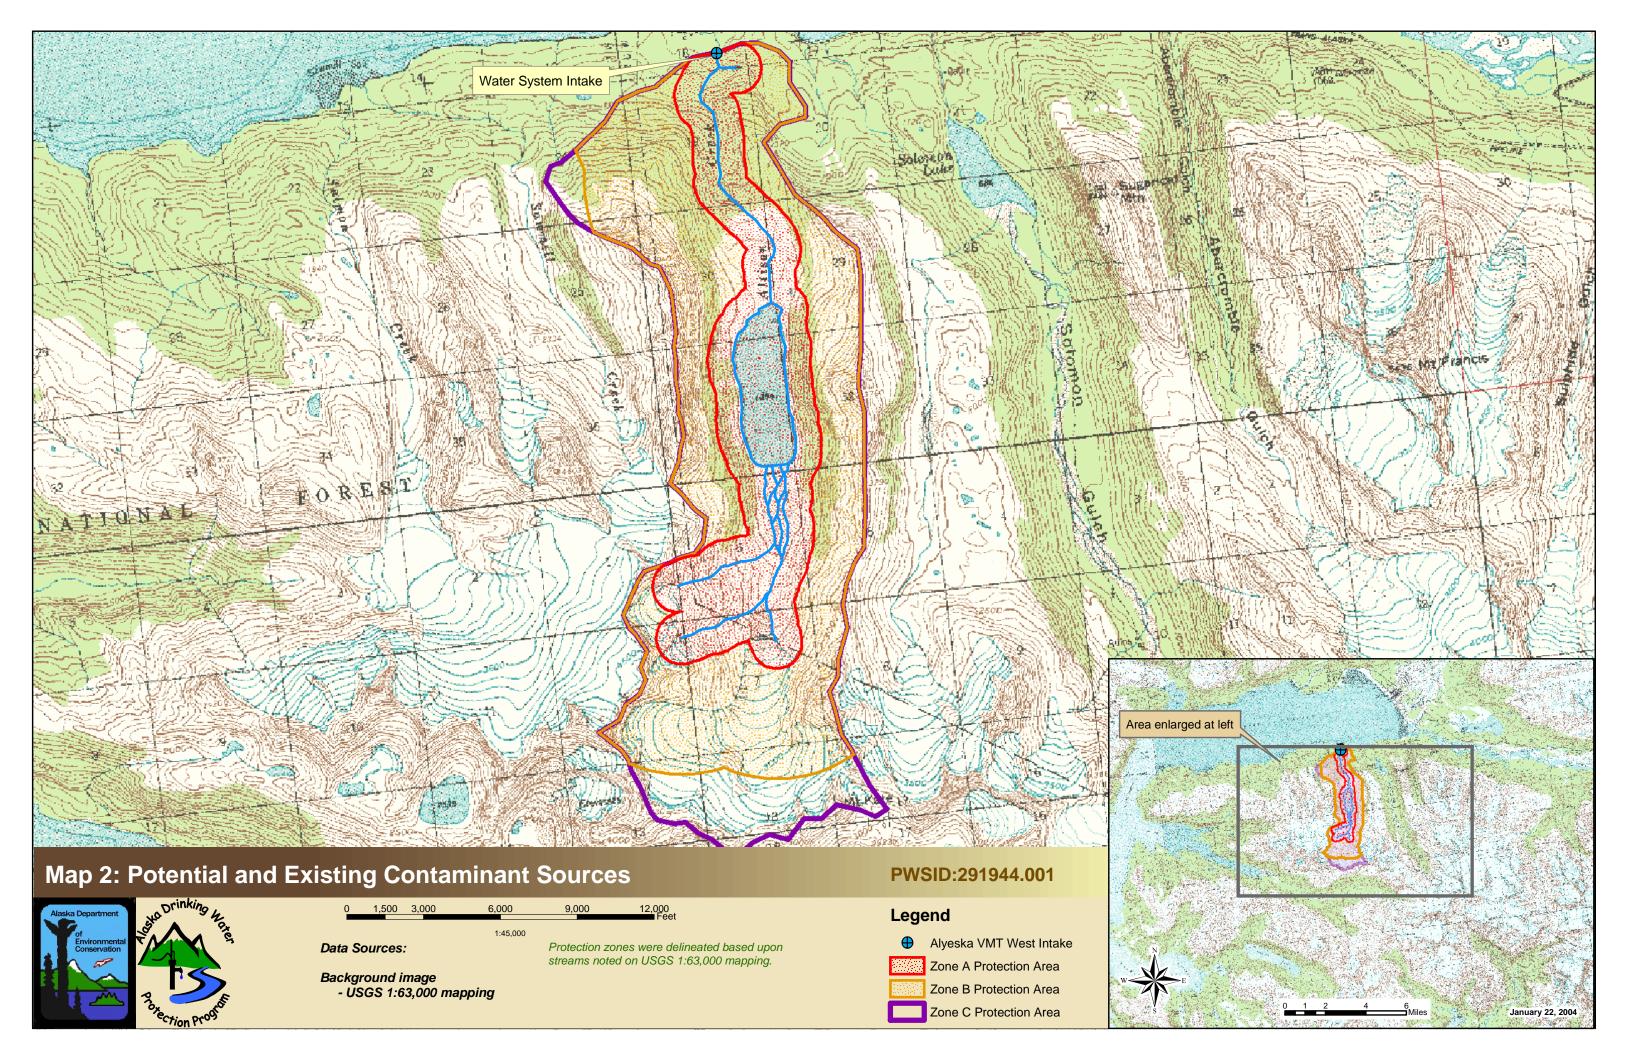


APPENDIX D


Vulnerability Analysis and Contaminant Risks (Charts 1-13)

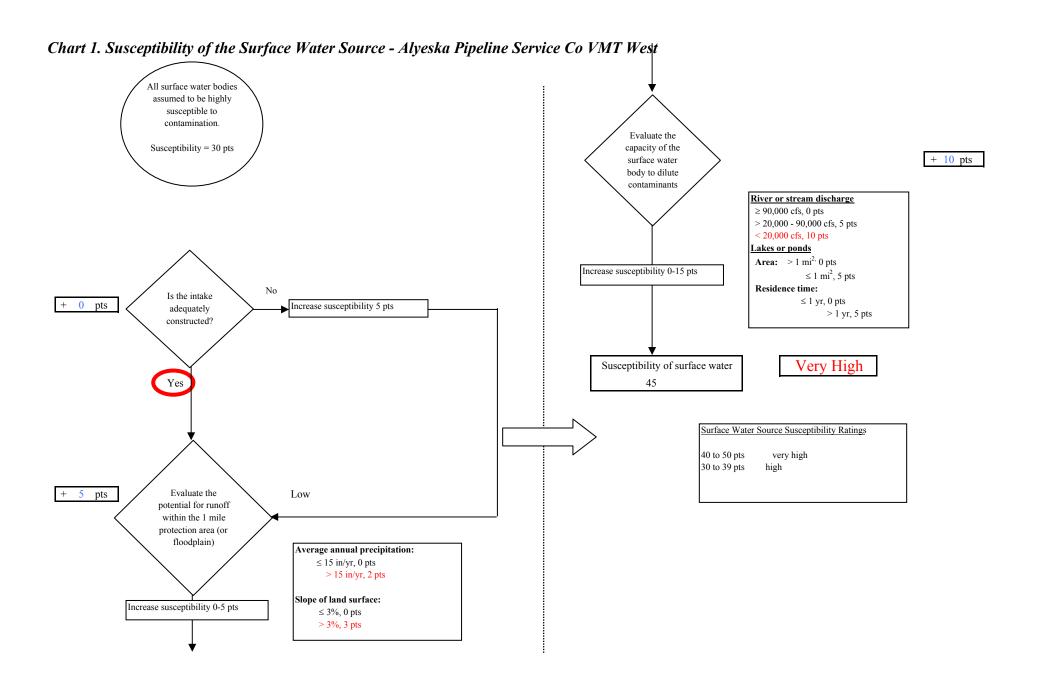


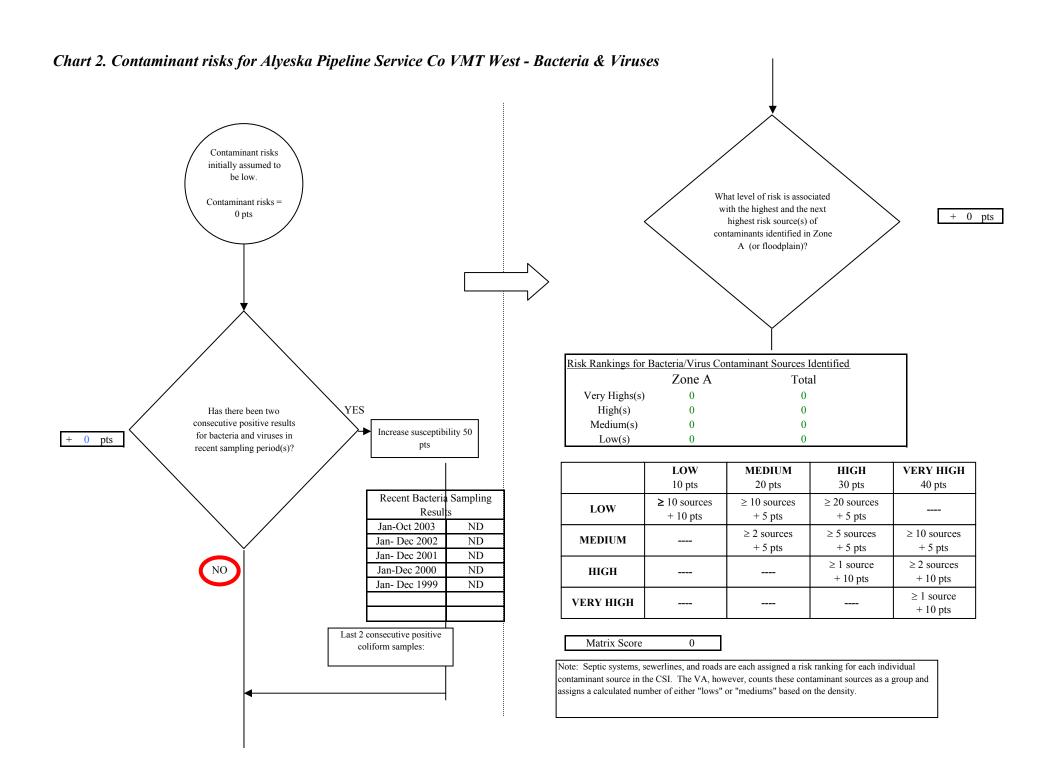

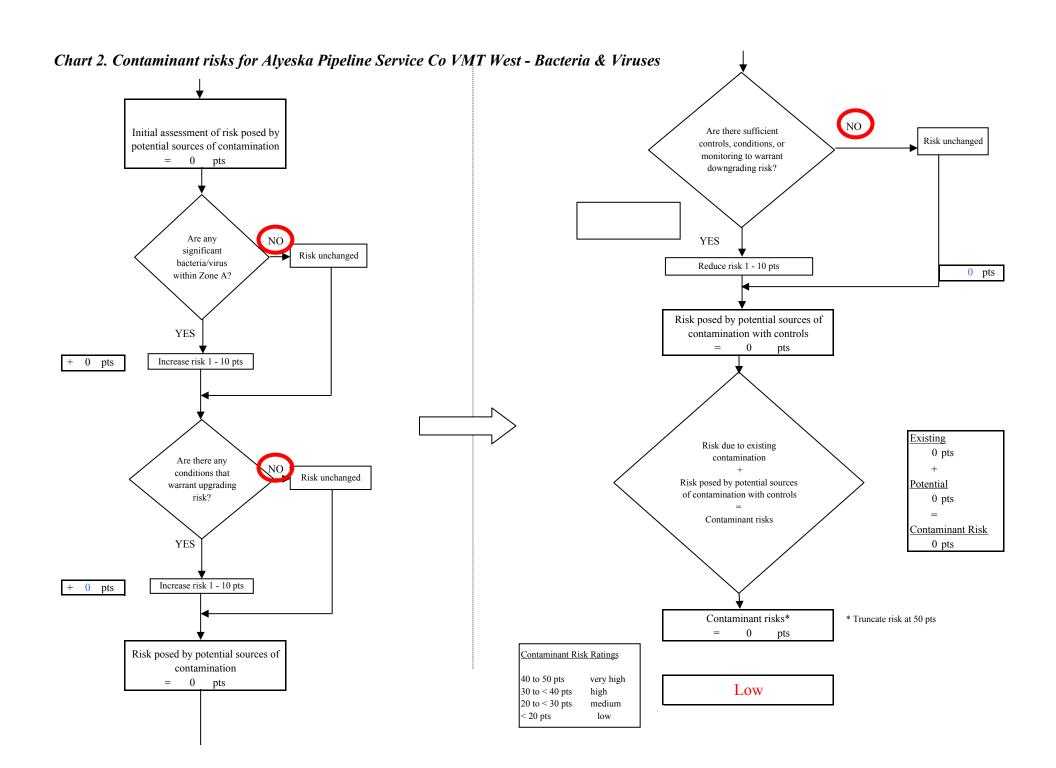


Page 3 of 24

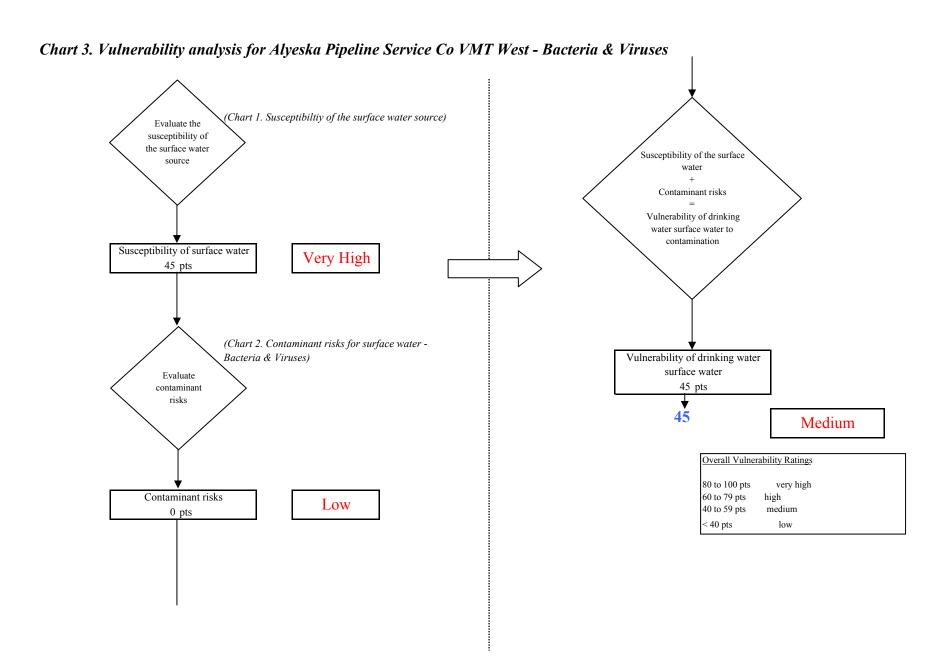

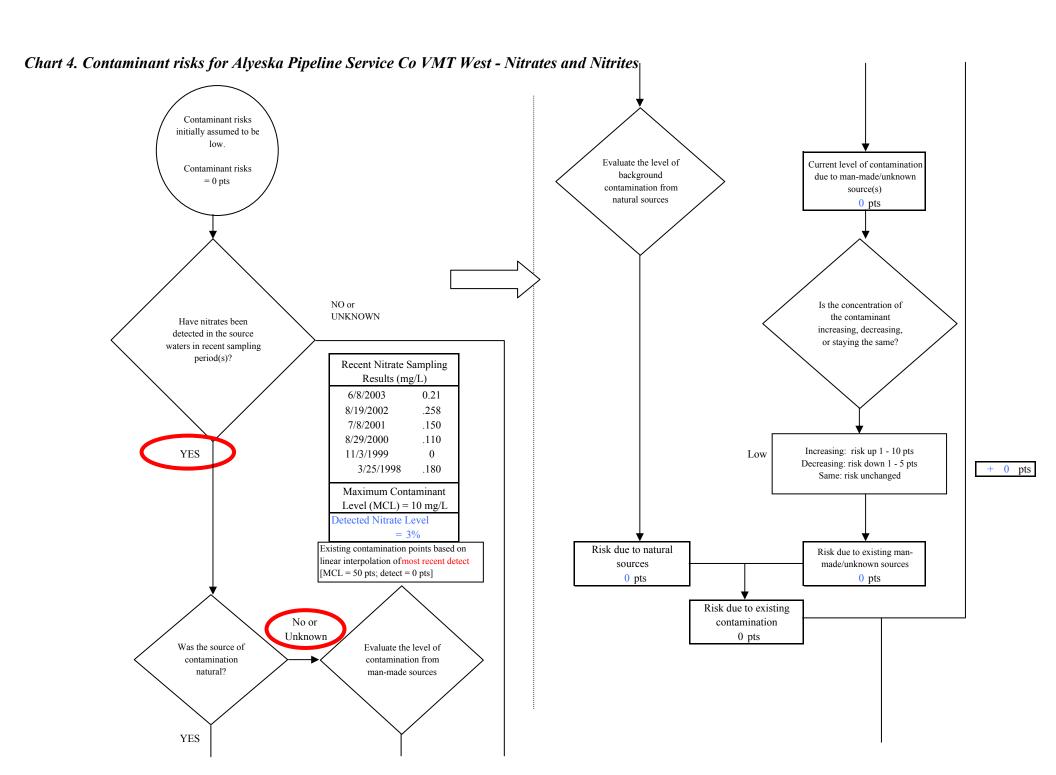

Page 5 of 24


Chart 4. Contaminant risks for Alyeska Pipeline Service Co VMT West - Nitrates and Nitrites





Risk Levels for Nitrate/Nitrite Sources identified in Zones A and B						
	Zone A Zone B Total					
Very Highs(s)	0	0	0			
High(s)	0	0	0			
Medium(s)	0		0			
Low(s)	0		0			


	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score 0

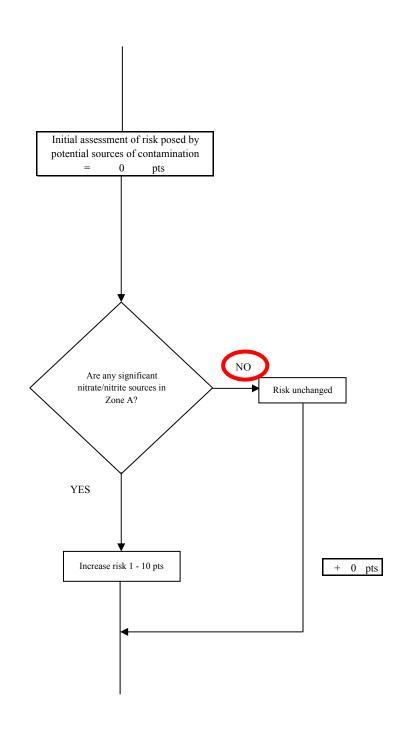

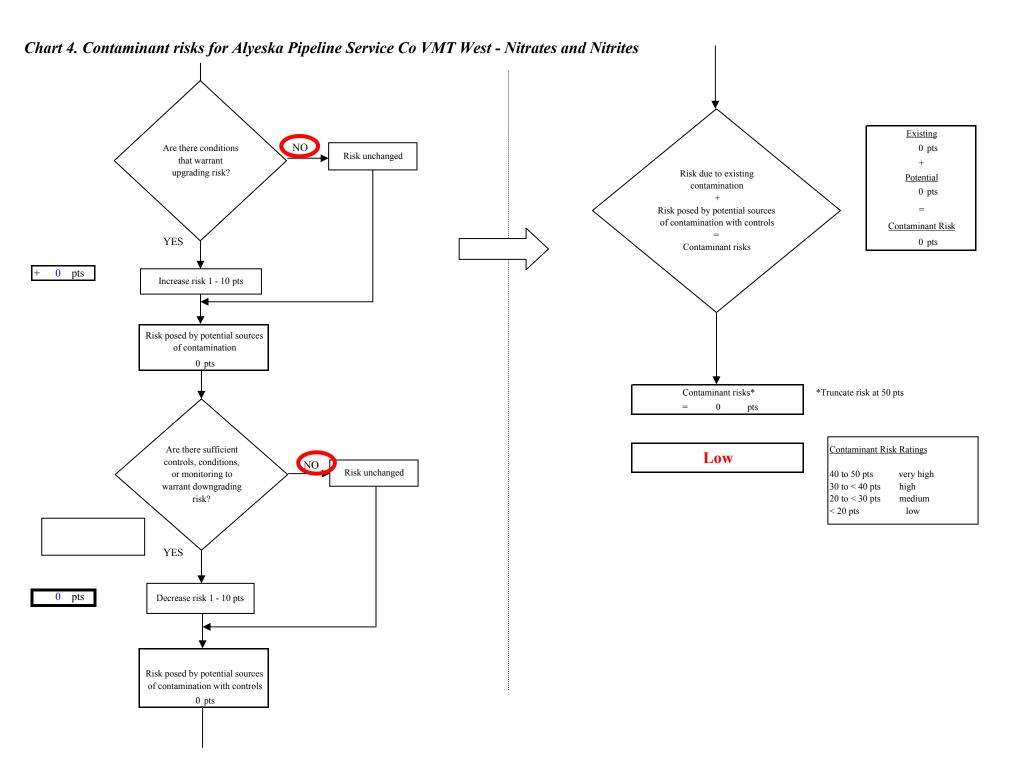


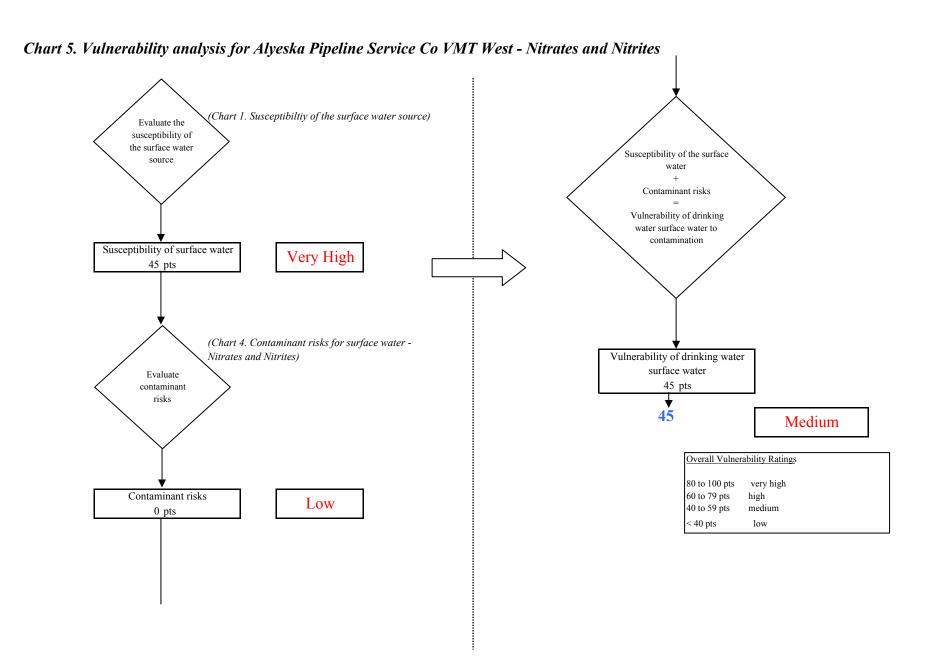

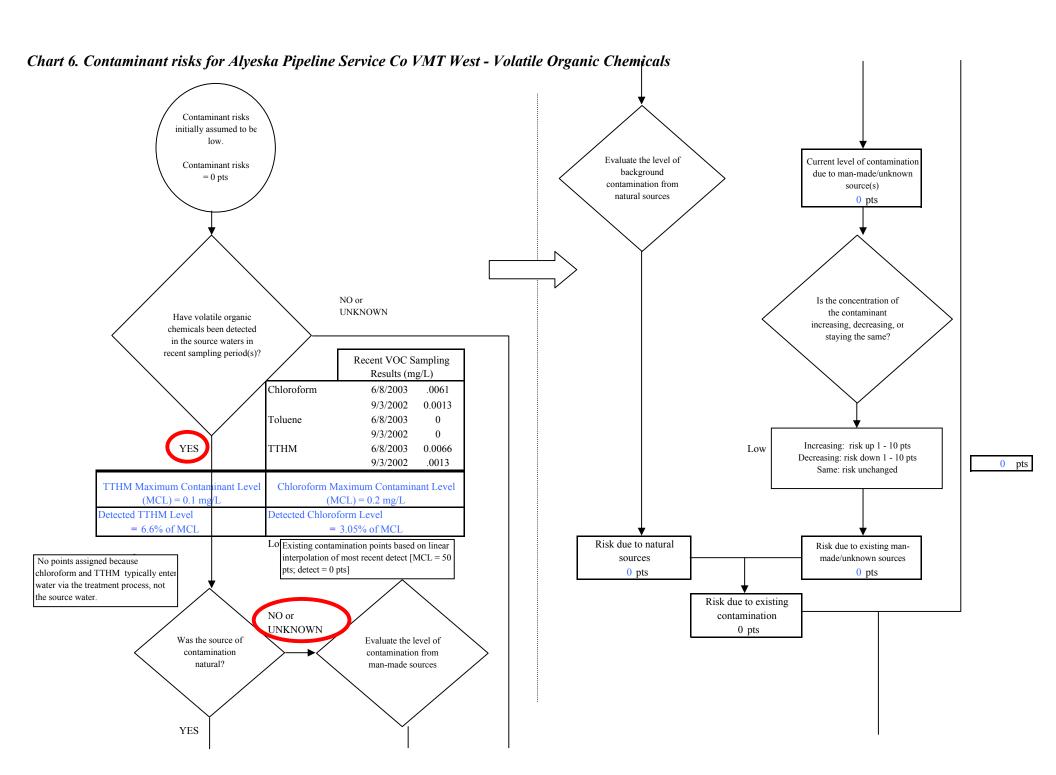


Page 9 of 24

Chart 6. Contaminant risks for Alyeska Pipeline Service Co VMT West - Volatile Organic Chemicals

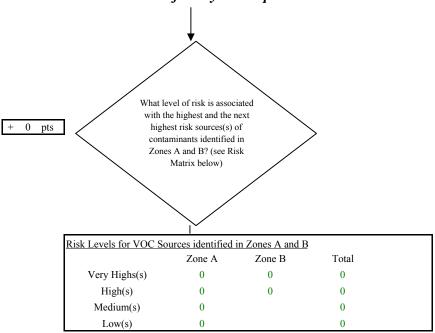

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score 0	
----------------	--

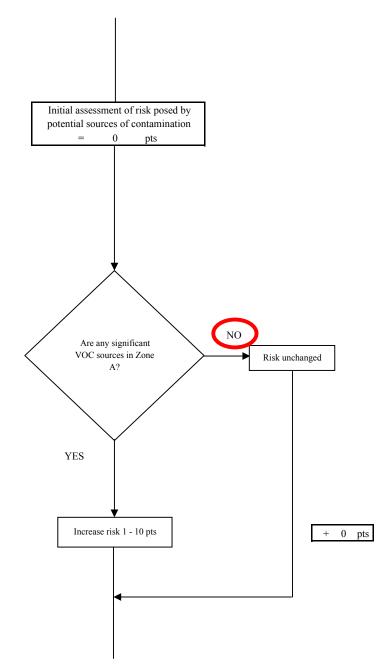



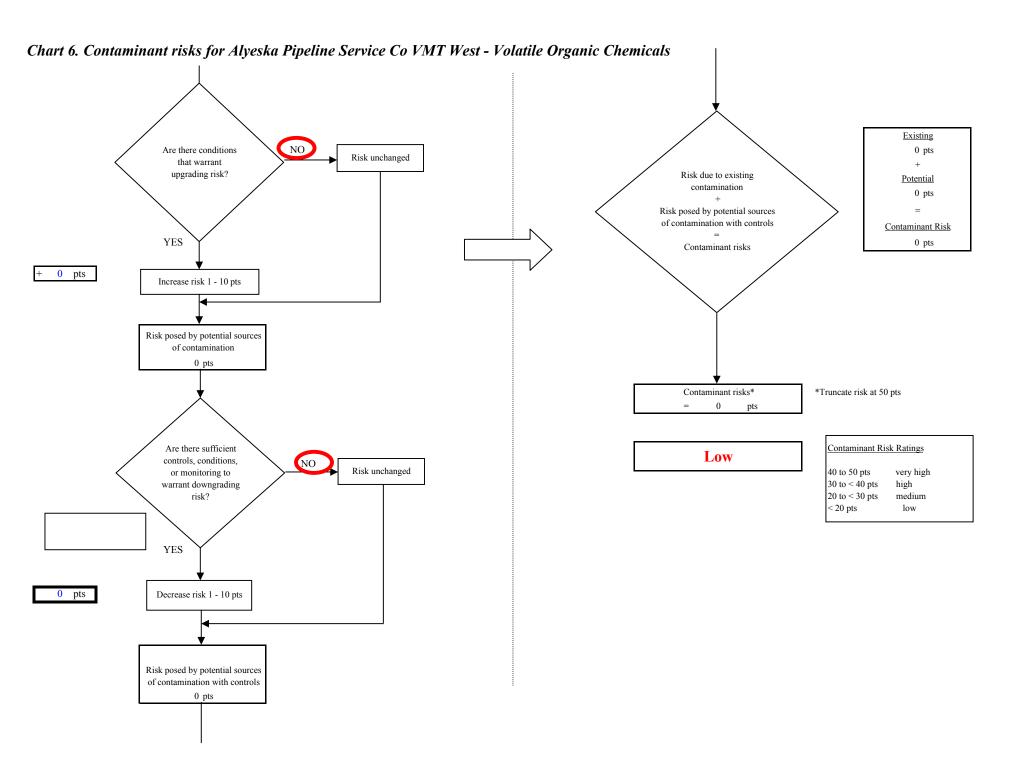


Chart 7. Vulnerability analysis for Alyeska Pipeline Service Co VMT West - Volatile Organic Chemicals (Chart 1. Susceptibiltiy of the surface water source) Evaluate the susceptibility of the surface water Susceptibility of the surface source water Contaminant risks Vulnerability of drinking water surface water to contamination Susceptibility of surface water Very High 45 pts (Chart 6. Contaminant risks for surface water -Volatile Organic Chemicals) Vulnerability of drinking water surface water Evaluate 45 pts contaminant risks 45 Medium Overall Vulnerability Ratings 80 to 100 pts very high Contaminant risks 60 to 79 pts high Low 40 to 59 pts medium 0 pts < 40 pts low

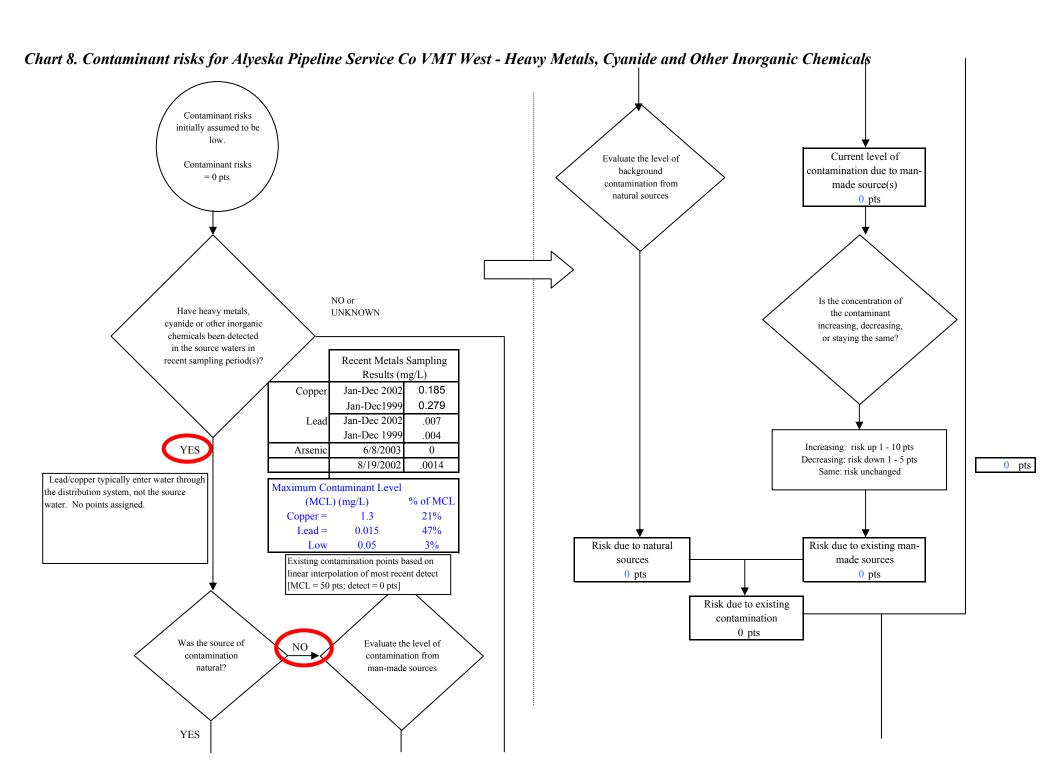

Page 13 of 24


Chart 8. Contaminant risks for Alyeska Pipeline Service Co VMT West - Heavy Metals, Cyanide and Other Inorganic Chemicals




Risk Levels for HM, Cyanide, or OIC Sources identified in Zones A and B				
	Zone A	Zone B	Total	
Very Highs(s)	0	0	0	
High(s)	0	0	0	
Medium(s)	0		0	
Low(s)	0		0	

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts


Matrix Score 0

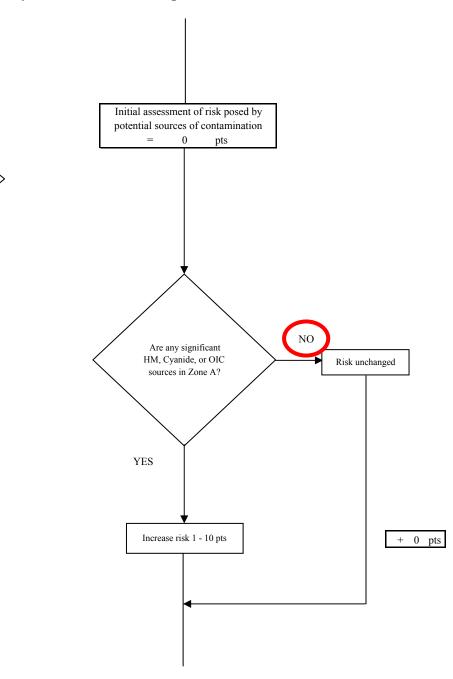


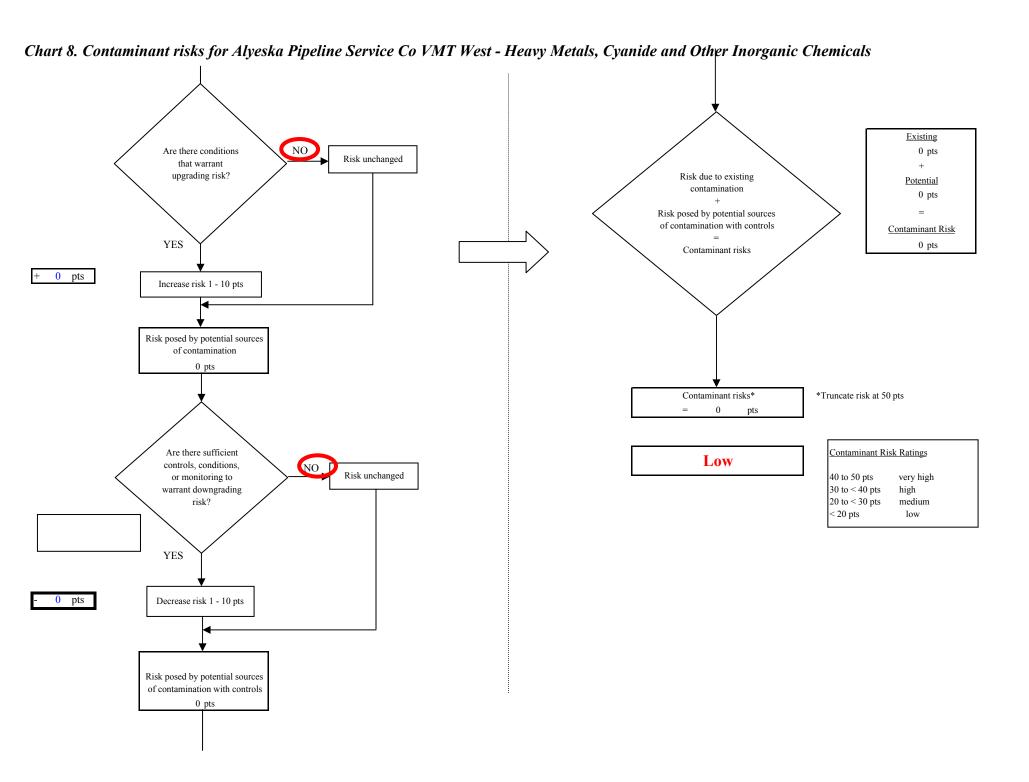

Page 15 of 24


Chart 9. Vulnerability analysis for Alyeska Pipeline Service Co VMT West - Heavy Metals, Cyanide and Other Inorganic Chemicals

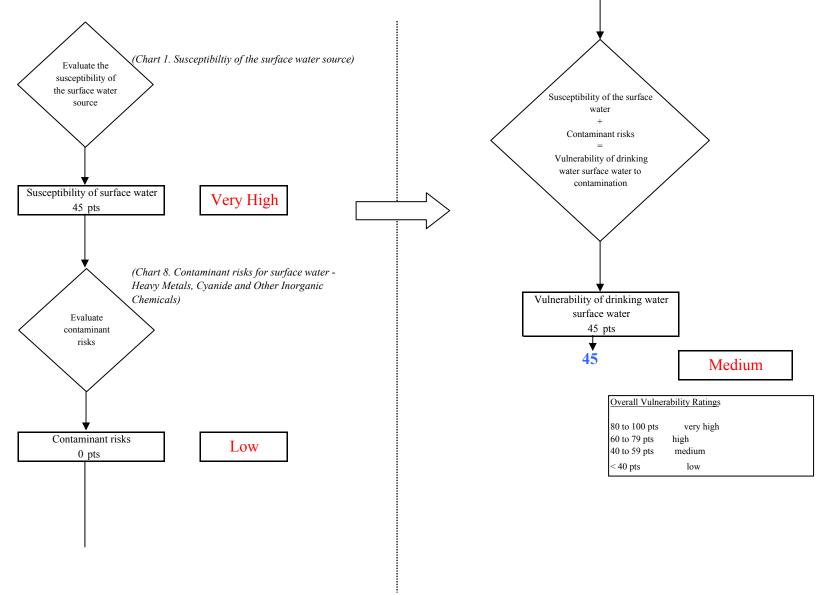

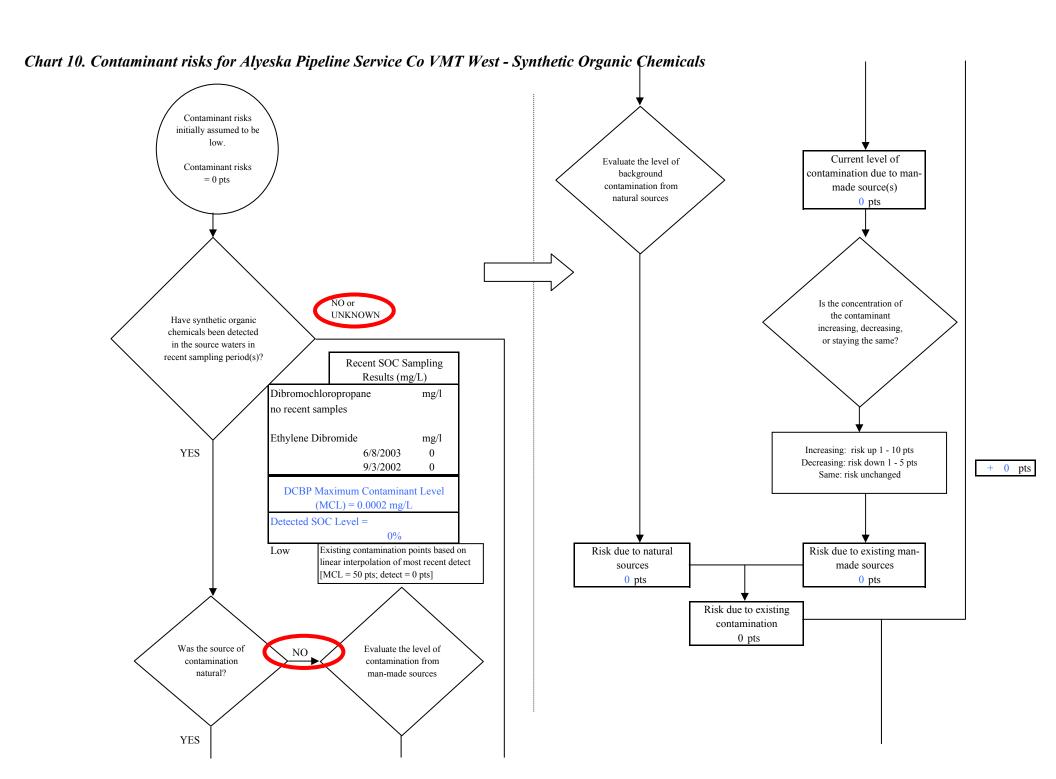

Page 17 of 24


Chart 10. Contaminant risks for Alyeska Pipeline Service Co VMT West - Synthetic Organic Chemicals




Risk Levels for SOC Sources identified in Zones A and C					
	Zone A	Zone B	Total		
Very Highs(s)	0	0	0		
High(s)	0	0	0		
Medium(s)	0	0	0		
Low(s)	0	0	0		

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts


Matrix Score 0

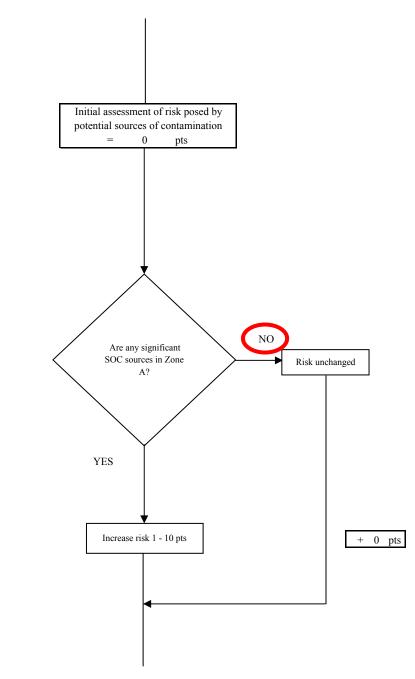

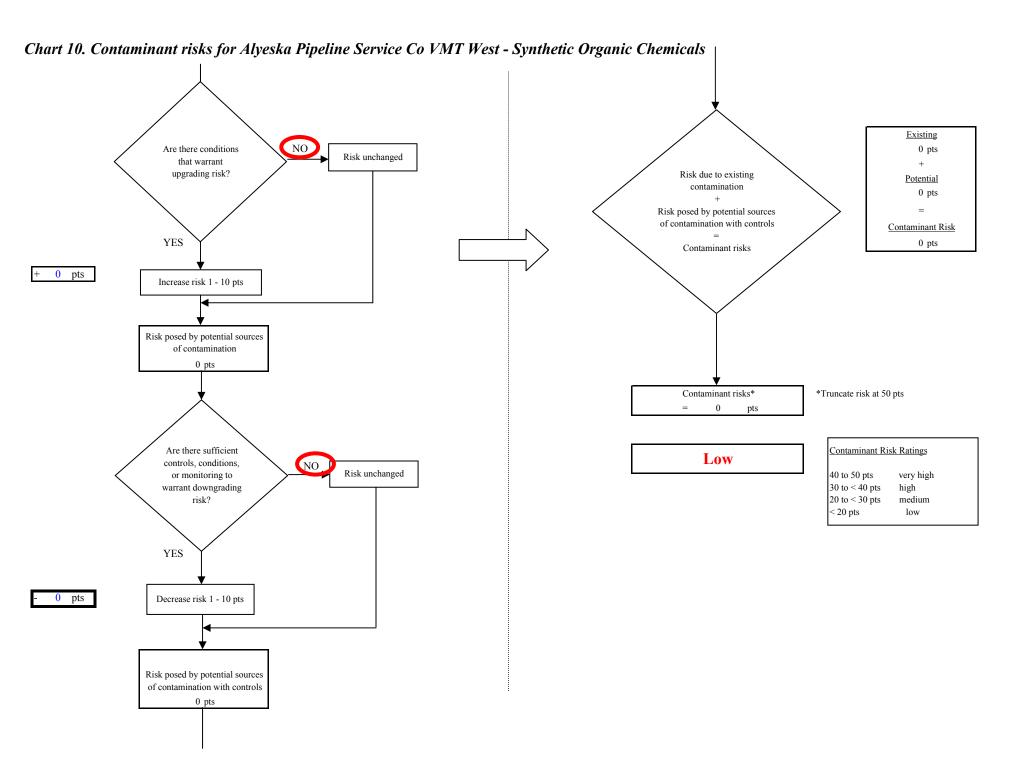


Page 19 of 24

Chart 11. Vulnerability analysis for Alyeska Pipeline Service Co VMT West - Synthetic Organic Chemicals (Chart 1. Susceptibiltiy of the surface water source) Evaluate the susceptibility of the surface water Susceptibility of the surface source water Contaminant risks Vulnerability of drinking water surface water to contamination Susceptibility of surface water Very High 45 pts (Chart 10. Contaminant risks for surface water -Synthetic Organic Chemicals) Vulnerability of drinking water surface water Evaluate 45 pts contaminant risks 45 Medium Overall Vulnerability Ratings 80 to 100 pts very high Contaminant risks 60 to 79 pts high Low 40 to 59 pts medium 0 pts < 40 pts low

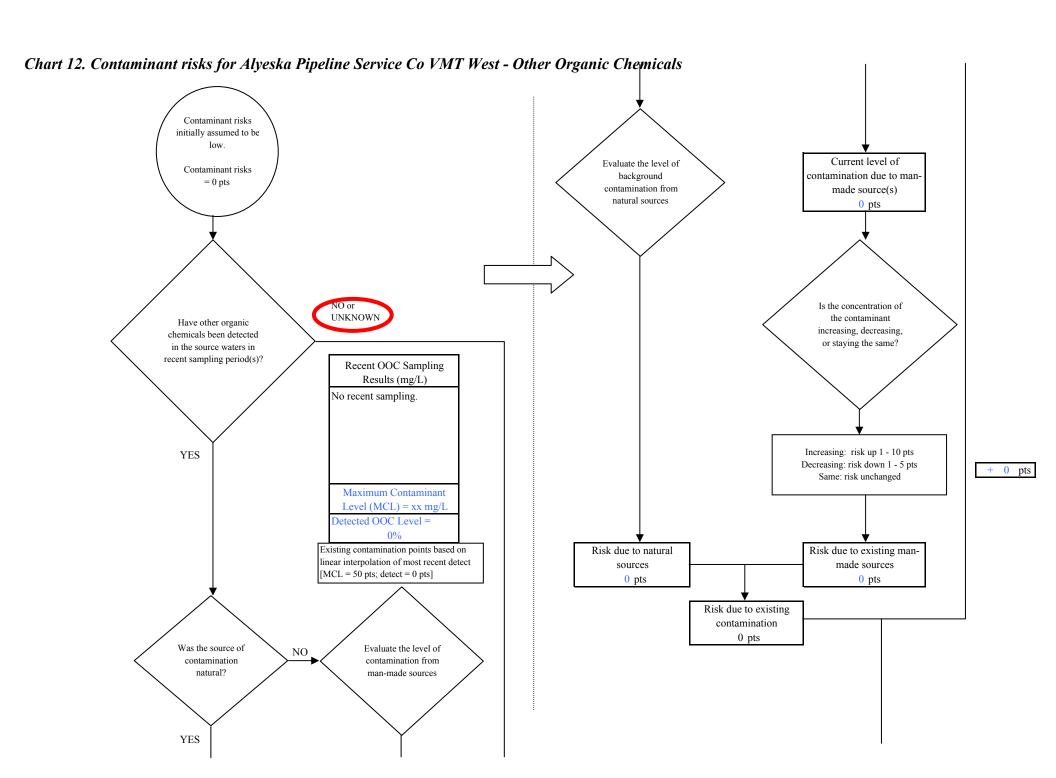

Page 21 of 24

Chart 12. Contaminant risks for Alyeska Pipeline Service Co VMT West - Other Organic Chemicals

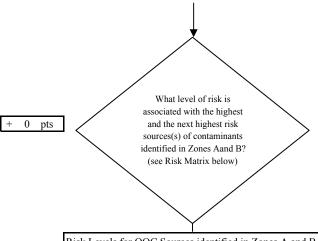

Risk Levels for OOC Sources identified in Zones A and B					
	Zone A	Zone B	Total		
Very Highs(s)	0	0	0		
High(s)	0	0	0		
Medium(s)	0	0	0		
Low(s)	0	0	0		

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score 0

