



Source Water Assessment

A Hydrogeologic Susceptibility and Vulnerability
Assessment for
Alaska Division of Parks - Lost Lake Well
Drinking Water System,
Big Delta area, Alaska
PWSID # 372131

DRINKING WATER PROTECTION PROGRAM REPORT #971

Alaska Department of Environmental Conservation

November 2003

Source Water Assessment for Alaska Division of Parks - Lost Lake Well Drinking Water System Big Delta area, Alaska PWSID# 372131

DRINKING WATER PROTECTION PROGRAM REPORT #971

The Drinking Water Protection Program (DWPP) is producing Source Water Assessments in compliance with the Safe Drinking Water Act Amendments of 1996. Each assessment includes a delineation of the source water area, an inventory of potential and existing contaminant sources that may impact the water, a risk ranking for each of these contaminants, and an evaluation of the potential vulnerability of these drinking water sources.

These assessments are intended to provide public water systems owners/operators, communities, and local governments with the best available information that may be used to protect the quality of their drinking water. The assessments combine information obtained from various sources, including the U.S. Environmental Protection Agency, Alaska Department of Environmental Conservation (ADEC), public water system owners/operators, and other public information sources. The results of this assessment are subject to change if additional data becomes available. It is anticipated this assessment will be updated every five years to reflect any changes in the vulnerability and/or susceptibility of public drinking water source. If you have any additional information that may affect the results of this assessment, please contact the Program Coordinator of DWPP, (907) 269-7521.

CONTENTS

Introduction Alaska Div Alaska Div Inventory	Summary
	lity of Alaska Division of Parks - Lost Lake Well Drinking Water System
	TABLES
Table 2. Stable 3.	Definition of Zones 2 Susceptibility 3 Contaminant Risks 3 Overall Vulnerability 4
	APPENDICES
Appendix	A. Alaska Division of Parks - Lost Lake Well Drinking Water Protection Area (Map 1)
Appendix	 B. Contaminant Source Inventory for Alaska Division of Parks - Lost Lake Well (Table 1) Contaminant Source Inventory and Risk Ranking for Alaska Division of Parks - Lost Lake Well— Bacteria and Viruses (Table 2) Contaminant Source Inventory and Risk Ranking for Alaska Division of Parks - Lost Lake Well— Nitrates/Nitrites (Table 3) Contaminant Source Inventory and Risk Ranking for Alaska Division of Parks - Lost Lake Well— Volatile Organic Chemicals (Table 4)
Appendix	C. Alaska Division of Parks - Lost Lake Well Drinking Water Protection Area and Potential and Existing Contaminant Sources (Map 2)
Appendix	 Vulnerability Analysis for Contaminant Source Inventory and Risk Ranking for Alaska Division of Parks - Lost Lake Well Public Drinking Water Source (Charts 1 – 8)

Source Water Assessment for Alaska Division of Parks - Lost Lake Well Source of Public Drinking Water Big Delta area, Alaska

Drinking Water Protection Program Alaska Department of Environmental Conservation

EXECUTIVE SUMMARY

The public water system for Alaska Division of Parks -Lost Lake Well is a Class B (transient/non-community) water system consisting of one well in the Big Delta area, Alaska. The wellhead received a susceptibility rating of **Low** and the aquifer received a susceptibility rating of **Medium**. Combining these two ratings produces a Low rating for the natural susceptibility of the well. Identified potential and current sources of contaminants for Alaska Division of Parks - Lost Lake Well public drinking water source include: a pit toilet and the campground access road. These identified potential and existing sources of contamination are considered sources of bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals. Overall, the public water source for Alaska Division of Parks -Lost Lake Well received a vulnerability rating of Low for bacteria and viruses, Low for nitrates and nitrites, and Low for volatile organic chemicals. This assessment of contaminant risks can be used as a foundation for local voluntary protection efforts, as well as a basis for the continuing efforts on the part of the system owner/operator to protect public health.

INTRODUCTION

The Alaska Department of Environmental Conservation (ADEC) is completing source water assessments for all public drinking water sources in the State of Alaska. The purpose of this assessment is to provide the owner/operator of Alaska Division of Parks - Lost Lake Well, communities, and local governments with information they can use to preserve the quality of Alaska's public drinking water supplies. The results of this source water assessment can be used to decide where voluntary protection efforts are needed and feasible, and also what efforts will be most effective in reducing contaminant risks to your water system. Ecology & Environment, Inc. has been contracted to perform these assessments under the supervision of ADEC.

This source water assessment combines a review of the

natural conditions at the site and the potential and existing contaminant risks. These are combined to determine the overall vulnerability of the drinking water source to contamination.

ALASKA DIVISION OF PARKS - LOST LAKE WELL PUBLIC DRINKING WATER SYSTEM

Alaska Division of Parks - Lost Lake Well public water system is a Class B (transient/non-community) water system. The system consists of one well located at mile 277.8 Richardson Highway (see Map 1 of Appendix A). The community of Big Delta is located at the confluence of the Delta and Tanana Rivers, on the Richardson Highway approximately 73 miles southeast of Fairbanks. The estimated 2002 population was 829 residents (ADCED 2003).

Residences and businesses in the Big Delta area are served by individual wells and septic systems. Refuse is transported to the landfill in nearby Delta Junction (ADCED 2003).

Surficial deposits in the Big Delta area are composed of alluvium – silt, sand, and gravel – along the rivers and outwash of the Donnelly glaciation elsewhere. The latter comprises sand and gravel in unconsolidated, well-stratified layers and lenses. These deposits are underlain by gneiss and quartzite (Weber et al. 1978); drillers' logs indicate the presence of shale as well.

Groundwater flow in the area is expected to be towards the northwest, towards the junction of the Tanana and Delta Rivers.

According to the well log, the depth of the Alaska Division of Parks - Lost Lake Well well is approximately 60 feet below ground surface.

The most recent Sanitary Survey (8/26/1999) for the water system indicates the land surface is appropriately sloped away from the well. Sloping of the ground surface around the well provides drainage of surface water away from the well casing. Also, the well is

grouted according to ADEC regulations. Proper grouting provides added protection against contaminants traveling along the well casing and into source waters.

This system operates May - October and serves approximately 35 non-residents.

ALASKA DIVISION OF PARKS - LOST LAKE WELL DRINKING WATER PROTECTION AREA (DWPA)

In order to evaluate whether a drinking water source is at risk, we must first evaluate what are the most likely pathways for surface contamination to reach the groundwater. These areas are determined by looking at the characteristics of the soil, groundwater, aquifer, and well.

The most probable area for contamination to reach the drinking water well is the area that contributes water to the well, the groundwater recharge area. This area is designated as the drinking water protection area. Because releases of contaminants within the protection area are most likely to impact the drinking water well, this area will serve as the focus for voluntary protection efforts.

The protection areas established for wells by the ADEC are usually separated into four zones, limited by the watershed. These zones correspond to differences in the time-of-travel (TOT) of the water moving through the aquifer to the well. An outline of the immediate watershed was used to determine the size and shape of the protection area. Additional methods were considered to take into account any uncertainties in groundwater flow and aquifer characteristics to arrive at a meaningful protection area. (Please refer to the Guidance Manual for Class B Public Water Systems for additional information).

The time of travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. The following is a summary of the four protection area zones for wells and the calculated time-of-travel for each:

Table 1. Definition of Zones

Zone	Definition
A	¹ / ₄ the distance for the 2-yr. time-of-travel
В	Less than the 2 year time-of-travel
C	Less Than the 5 year time-of-travel
D	Less than the 10 year time-of-travel
_	•

The DWPA may be limited by its immediate watershed and therefore may not include all four zones (See Map 1 of Appendix A).

INVENTORY OF POTENTIAL AND EXISTING CONTAMINANT SOURCES

The Drinking Water Protection Program has completed an inventory of potential and existing sources of contamination within the Alaska Division of Parks - Lost Lake Well DWPA. This inventory was completed through a search of agency records and other publicly available information. Potential sources of contamination to the drinking water aquifer include a wide range of categories and types. Potential drinking water contaminants are found within agricultural, residential, commercial, and industrial areas, but can also occur within areas that have little or no development.

For the basis of all Class B public water system assessments, three categories of drinking water contaminants were inventoried. They include:

- Bacteria and viruses;
- Nitrates and/or nitrites:
- Volatile organic chemicals

The sources are displayed on Map 2 of Appendix C and summarized in Table 1 of Appendix B.

RANKING OF CONTAMINANT RISKS

Once the potential and existing sources of contamination have been identified, they are assigned a ranking according to what type and level of risk they represent. Ranking of contaminant risks for a "potential" or "existing" source of contamination is a function of toxicity and volumes of specific contaminants associated with that source. Rankings include:

- Low;
- Medium;
- High; and
- Very High.

The time-of-travel for contaminants within the water varies and is dependent on the physical and chemical characteristics of each contaminant. Bacteria and Viruses are only inventoried in Zones A and B because of their short life span. Only "Very High" and "High" rankings are inventoried within the outer Zone D due to the probability of contaminant dilution by the time the contaminants get to the well.

Tables 2 through 4 in Appendix B contain the ranking of potential and existing sources of contamination with respect to bacteria and viruses, nitrates and/or nitrites, and volatile organic chemicals.

VULNERABILITY OF ALASKA DIVISION OF PARKS - LOST LAKE WELL DRINKING WATER SYSTEM

Vulnerability of a drinking water source to contamination is a combination of two factors:

- Natural susceptibility; and
- Contaminant risks.

Appendix D contains eight charts, which together form the 'Vulnerability Analysis' for a source water assessment for a public drinking water source. Chart 1 analyzes the 'Susceptibility of the Wellhead' to contamination by looking at the construction of the well and its surrounding area. Chart 2 analyzes the 'Susceptibility of the Aquifer' to contamination by looking at the naturally occurring attributes of the water source and influences on the groundwater system that might lead to contamination. Chart 3 analyzes 'Contaminant Risks' for the drinking water source with respect to bacteria and viruses. The 'Contaminant Risks' portion of the analysis considers potential sources of contaminants as well as a review of contamination that has or may have occurred, but has not arrived or been detected at the well. Lastly, Chart 4 contains the 'Vulnerability Analysis for Bacteria and Viruses'. Charts 5 through 8 contain the Contaminant Risks and Vulnerability Analyses for nitrates and nitrites and volatile organic chemicals, respectively.

A score for the Natural Susceptibility is reached by considering the properties of the well and the aquifer.

Susceptibility of the Wellhead (0 – 25 Points) (Chart 1 of Appendix D)

+

Susceptibility of the Aquifer (0 – 25 Points) (Chart 2 of Appendix D)

=

Natural Susceptibility (Susceptibility of the Well) (0-50 Points)

A ranking is assigned for the Natural Susceptibility according to the point score:

Natural Suscept	ibility Ratings
40 to 50 pts	Very High
30 to < 40 pts	High
20 to < 30 pts	Medium
< 20 pts	Low

The well for Alaska Division of Parks - Lost Lake Well is completed in a confined aquifer. Confined aquifers are somewhat protected from migration of water from the surface by an overlying low-permeability layer, such as a clay or till. However, contaminants at the surface have the potential to impact this aquifer adversely because wells penetrating the aquifer can act as conduits. Table 2 shows the Susceptibility scores and ratings for Alaska Division of Parks - Lost Lake Well.

Table 2. Susceptibility

Susceptibility of the Wellhead	Score 0	Rating Low
Susceptibility of the	13	Medium
Aquifer Natural Susceptibility	13	Low

Contaminant risks to a drinking water source depend on the type, number or density, and distribution of contaminant sources. This score has been derived from an examination of existing and historical contamination that has been detected at the drinking water source through routine sampling. It also evaluates potential sources of contamination. Flow charts are used to assign a point score, and ratings are assigned in the same way as for the natural susceptibility:

Contaminant Ri	sk Ratings
40 to 50 pts	Very High
30 to < 40 pts	High
20 to < 30 pts	Medium
< 20 pts	Low

Table 3 summarizes the Contaminant Risks for each category of drinking water contaminants.

Table 3. Contaminant Risks

Category Bacteria and Viruses	Score 12	Rating Low
Nitrates and/or Nitrites	14	Low
Volatile Organic Chemicals	12	Low

Finally, an overall vulnerability score is assigned for each water system by combining each of the contaminant risk scores with the natural susceptibility score:

Vulnerability of the Drinking Water Source to Contamination (0 - 100).

Again, rankings are assigned according to a point score:

Overall Vulneral	oility Ratings
80 to 100 pts	Very High
60 to < 80 pts	High
40 to < 60 pts	Medium
< 40 pts	Low

Table 4 contains the overall vulnerability scores (0 – 100) and ratings for each of the three categories of drinking water contaminants. Note: scores are rounded off to the nearest five.

Table 4. Overall Vulnerability

Category Bacteria and Viruses	Score 25	Rating Low
Nitrates and/or Nitrites	25	Low
Volatile Organic Chemicals	25	Low

Bacteria and Viruses

The contaminant risk for bacteria and viruses is Low, with the pit toilet and road representing the greatest risk to the drinking water well (see Chart 3 – Contaminant Risks for Bacteria and Viruses in Appendix D).

Residents and businesses in the area generally dispose of wastewater in private septic systems. Although this report does not address such systems (unless their location is known), they can pose a risk of bacteria/virus and nitrate/nitrite contamination to drinking water sources. Proper design and maintenance of septic systems is the best safeguard against such contamination.

After combining the contaminant risk for bacteria and viruses with the natural susceptibility of the well, the overall vulnerability of the well to contamination by bacteria and viruses is Low.

Nitrates and Nitrites

The contaminant risk for nitrates and nitrites is Low, with the pit toilet and road representing the highest risk to this source of public drinking water (see Chart 5 - Contaminant Risks for Nitrates and/or Nitrites in Appendix D). Nitrates are very mobile, moving at approximately the same rate as water.

The last five years' sampling history for Alaska Division of Parks - Lost Lake Well public water source indicates the most recent concentration detected was 0.300 mg/L on 5/30/2001, which represents 3.0% of the Maximum Contaminant Level (MCL). While nitrates and nitrites can occur naturally in groundwater, a level of 20% of the MCL or more is considered to be due to manmade sources. Water with levels of nitrates and nitrites below 100% of the MCL is considered safe to drink by the U.S. Environmental Protection Agency (EPA 2003). After combining the contaminant risk for nitrates and nitrites with the natural susceptibility of the well, the overall vulnerability of the well to contamination by nitrates and nitrites is Low.

Volatile Organic Chemicals

The contaminant risk for volatile organic chemicals is Low, with the road representing the highest risk for volatile organic chemicals (see Chart 7 – Contaminant Risks for Volatile Organic Chemicals in Appendix D).

Residents in the area typically heat their homes with various types of on-site fuel sources, including propane and heating oil stored in aboveground or underground storage tanks. Although this report does not address heating oil tanks (unless their location is known), they can pose a risk of volatile organic chemical contamination to drinking water sources. The most common causes of fuel leaks of these heating oil systems are overfilling the tank, ruptured fuel lines, leaking storage tanks, damaged or faulty valves and vandalism. Secondary containment around the tank and regular system maintenance can help prevent many of these harmful fuel leaks and help protect the drinking water supply.

Class B water systems generally are not required to test for volatile organic chemicals. After combining the potential contaminant risk for volatile organic chemicals with the natural susceptibility of the well, the overall vulnerability of the well to contamination by volatile organic chemicals is Low.

REFERENCES

Alaska Department of Community and Economic Development (ADCED), 2003, Alaska Community Database [WWW database]. URL http://www.dced.state.ak.us/cbd/commdb/CF BLOCK.cfm

Freeze, R.A. and Cherry, J.A., 1979, Groundwater, Upper Saddle River, NJ: Prentice Hall, Inc.


United States Environmental Protection Agency (EPA), 2003, *Consumer Fact Sheet on Nitrates/Nitrites*, http://www.epa.gov/OGWDW/contaminants/dw_contamfs/nitrates.html.

Weber, Florence R., Foster, Helen L., Keith, Terry E.C., and Dusel-Bacon, Cynthia, 1978, *Preliminary Geologic Map of the Big Delta Quadrangle, Alaska*, Anchorage, AK: Department of the Interior, United States Geological Survey.

APPENDIX A

Alaska Division of Parks - Lost Lake Well Drinking Water Protection Area Location Map (Map 1)

Drinking Water Protection Area for AK Division of Parks-Lost Lake

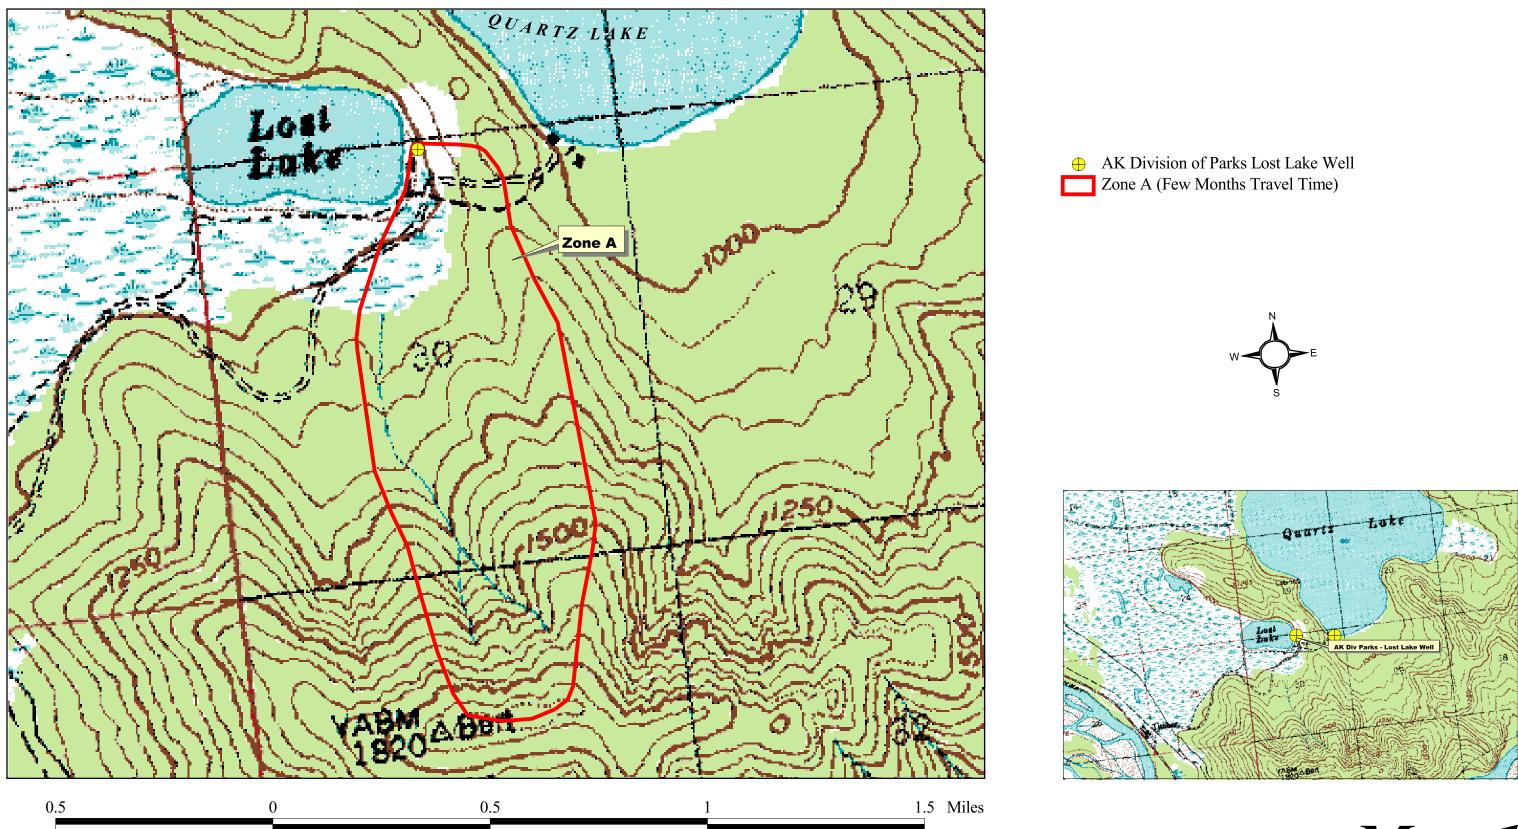

Map 1

APPENDIX B

Contaminant Source Inventory and Risk Ranking for Alaska Division of Parks - Lost Lake Well (Tables 1-4)

Table 1

Contaminant Source Inventory for AK Div Parks - Lost Lake Well

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Map Number	Comments
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-1	A	2	Alaska Division of Parks- Lost Lake
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	2	Access Road

PWSID 372131.001

Table 2

Contaminant Source Inventory and Risk Ranking for AK Div Parks - Lost Lake Well Sources of Bacteria and Viruses

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-1	A	Low	2	Alaska Division of Parks- Lost Lake
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Access Road

PWSID 372131.001

Contaminant Source Inventory and Risk Ranking for AK Div Parks - Lost Lake Well Sources of Nitrates/Nitrites

Table 3

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments
Pit toilets (vaulted) nonresidential (one or more)	D17	D17-1	A	Low	2	Alaska Division of Parks- Lost Lake
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Access Road

Table 4

Contaminant Source Inventory and Risk Ranking for AK Div Parks - Lost Lake Well Sources of Volatile Organic Chemicals


PWSID 372131.001

Contaminant Source Type	Contaminant Source ID	CS ID tag	Zone	Risk Ranking for Analysis	Map Number	Comments	
Highways and roads, paved (cement or asphalt)	X20	X20-1	A	Low	2	Access Road	

APPENDIX C

Alaska Division of Parks - Lost Lake Well
Drinking Water Protection Area
and Potential and Existing Contaminant Sources
(Map 2)

Drinking Water Protection Area for Alaska Division of Parks-Lost Lake and Potential and Existing Sources of Contamination

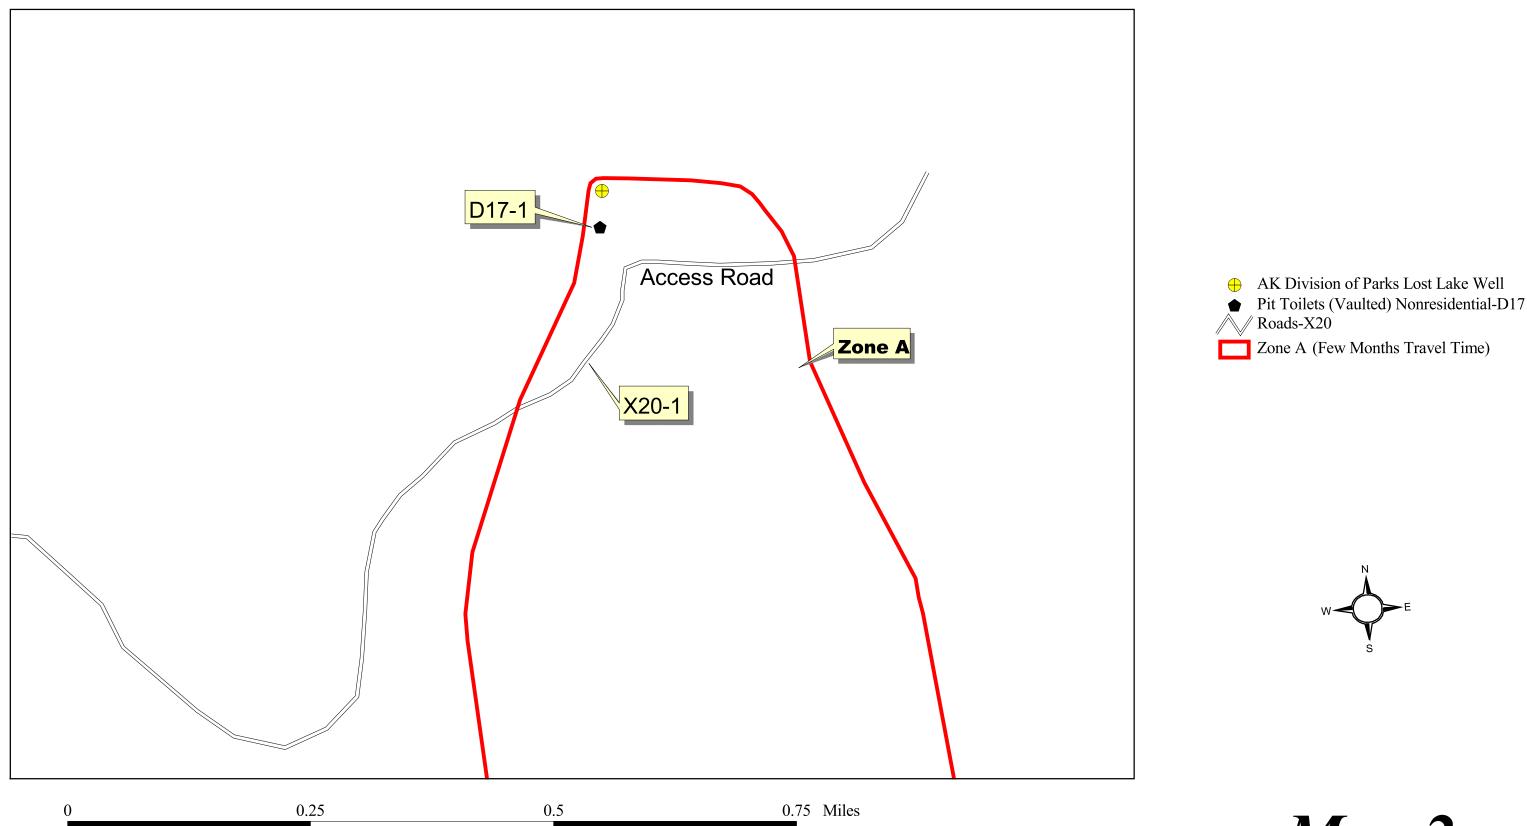

PWSID 372131.001

Map 2

APPENDIX D

Vulnerability Analysis for Alaska Division of Parks - Lost Lake Well Public Drinking Water Source

(Charts 1-8)

Chart 1. Susceptibility of the wellhead - Alaska Division of Parks - Lost Lake




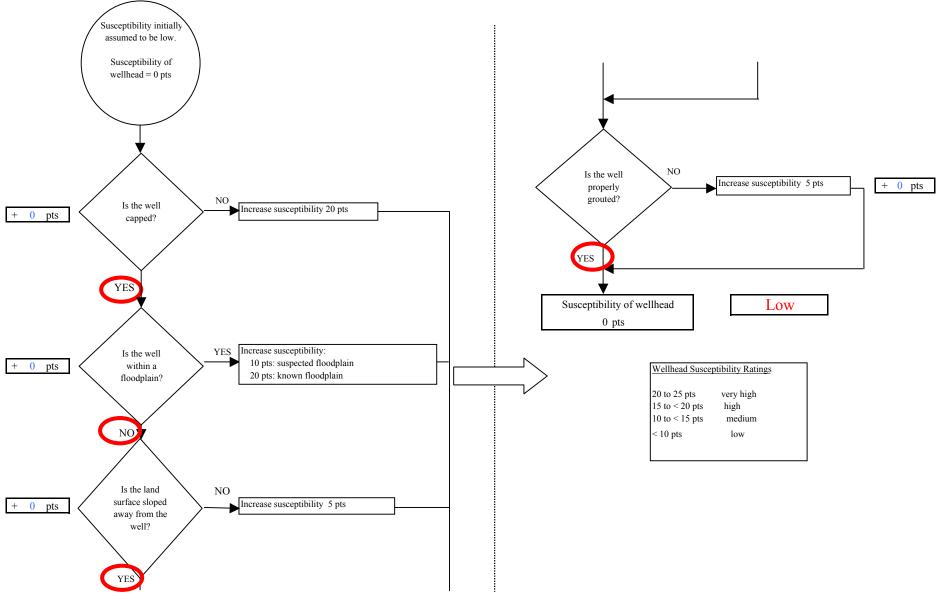



Chart 2. Susceptibility of the aquifer - Alaska Division of Parks - Lost Lake

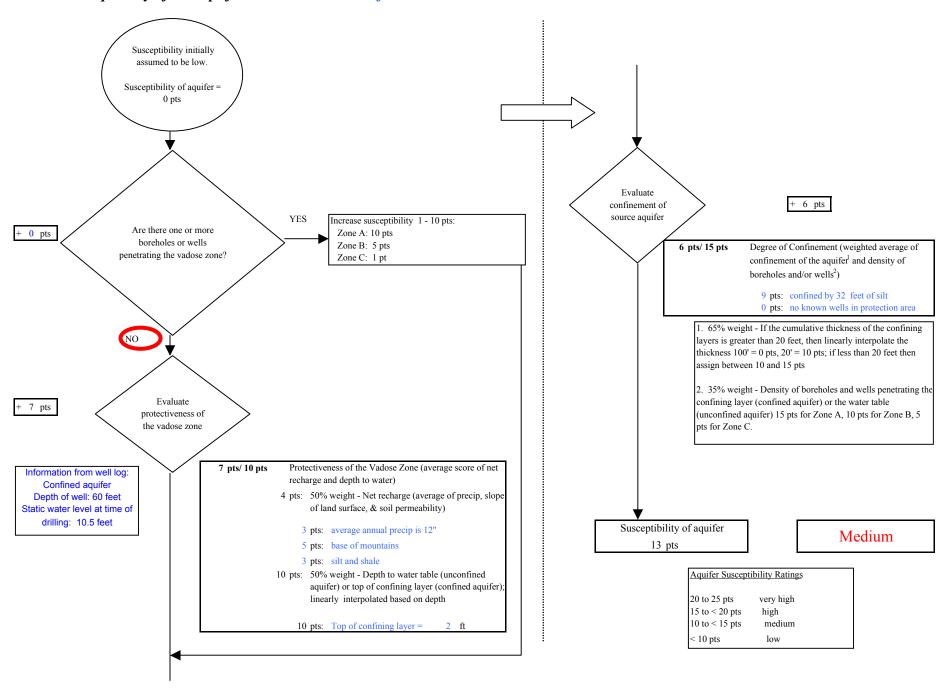


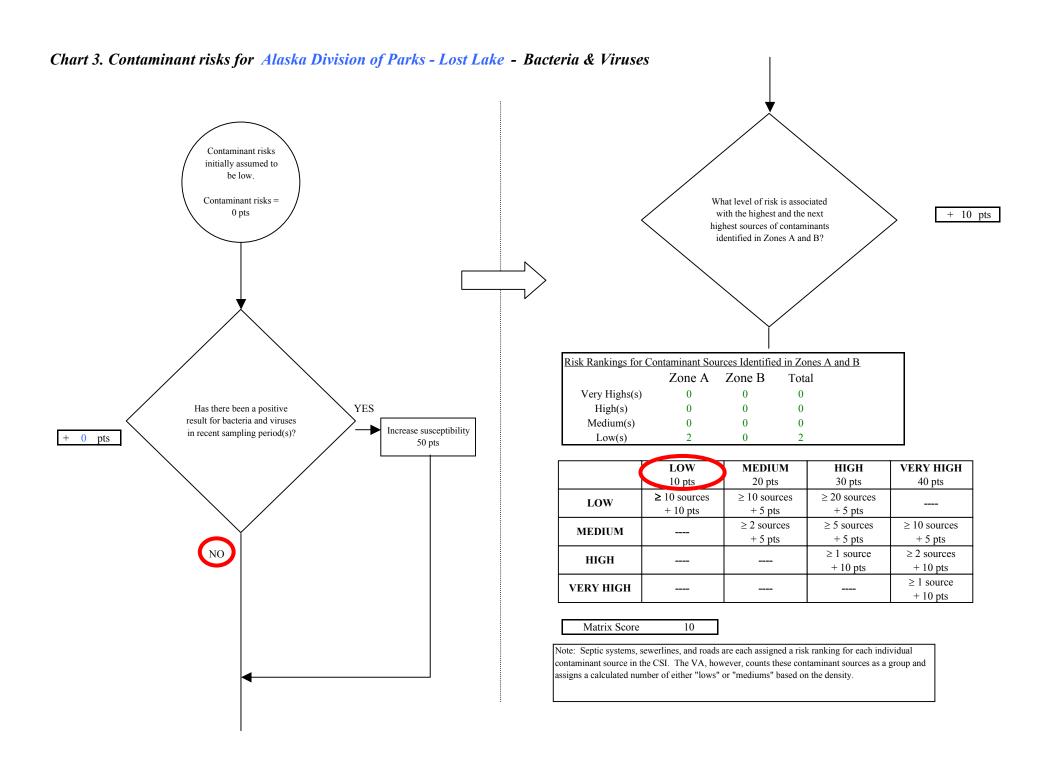

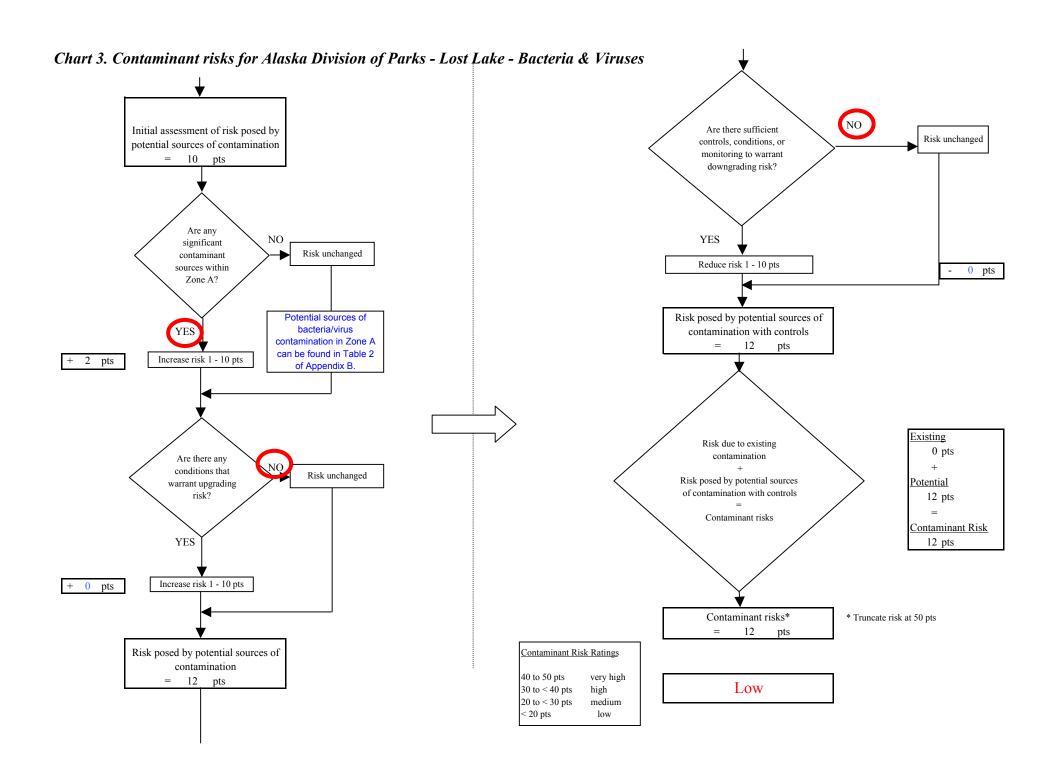

Page 4 of 13

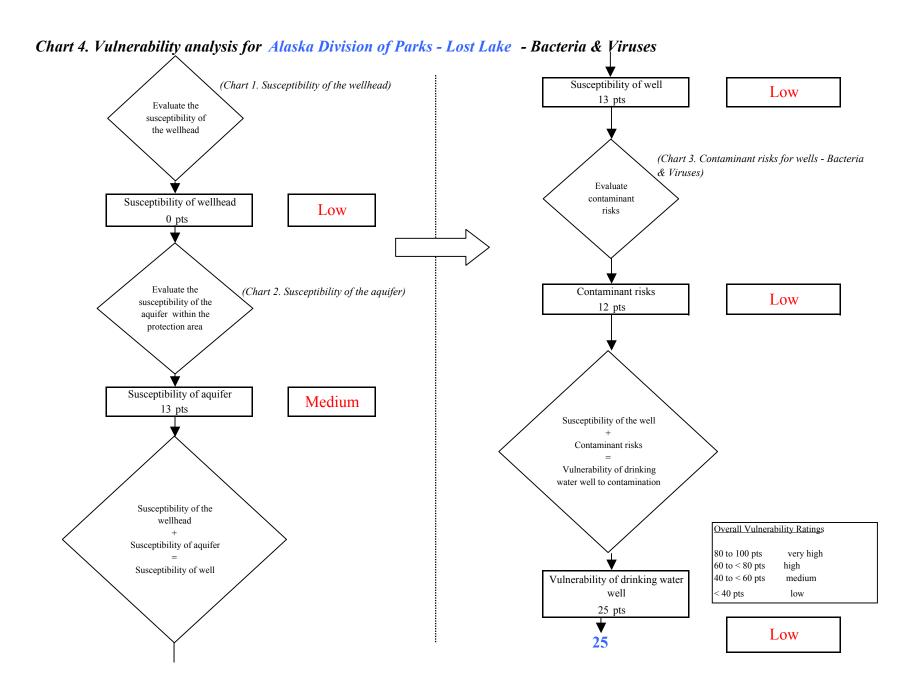


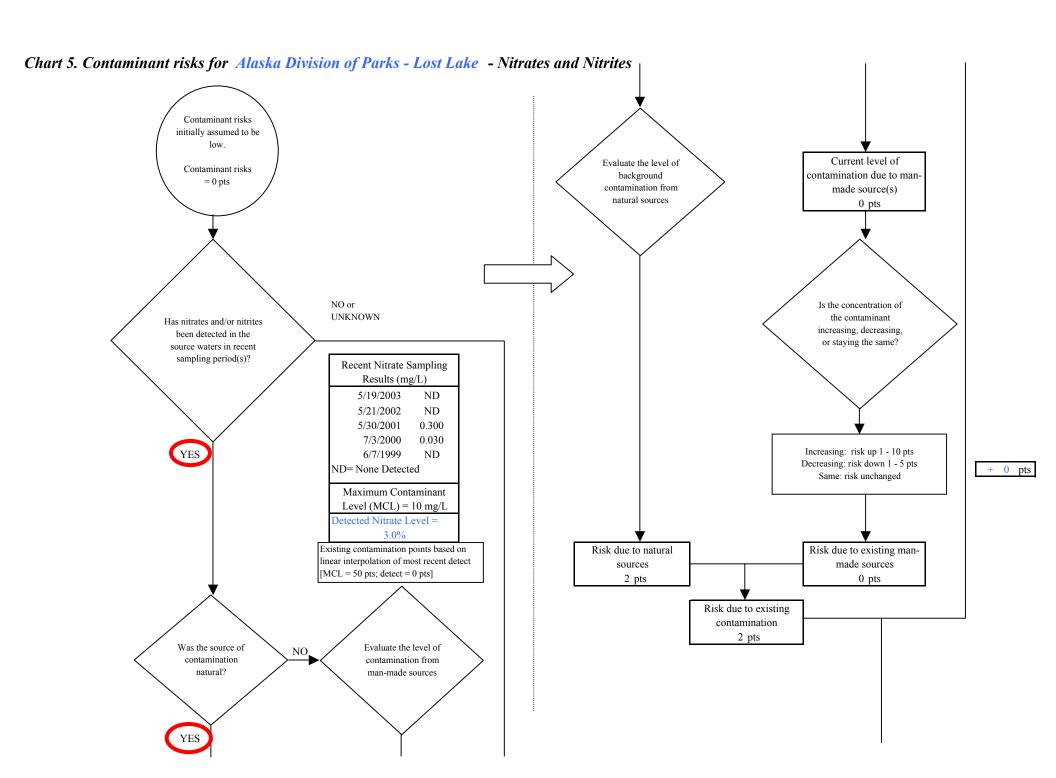

Page 6 of 13



Chart 5. Contaminant risks for Alaska Division of Parks - Lost Lake - Nitrates and Nitrites




10 pts


Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	0	0
Medium(s)	0	0	0
Low(s)	2	0	2


	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts


Matrix Score	10

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

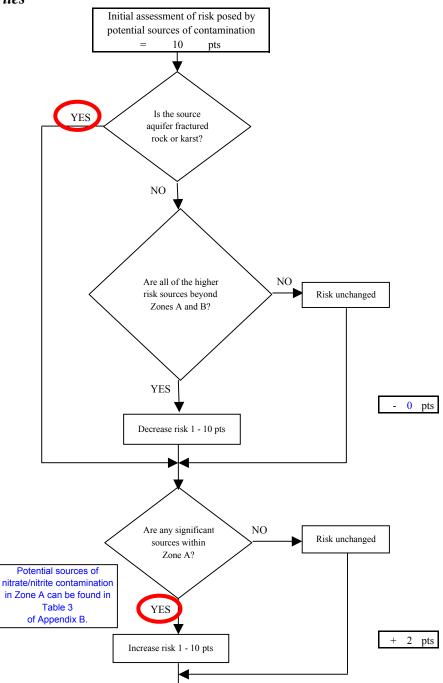


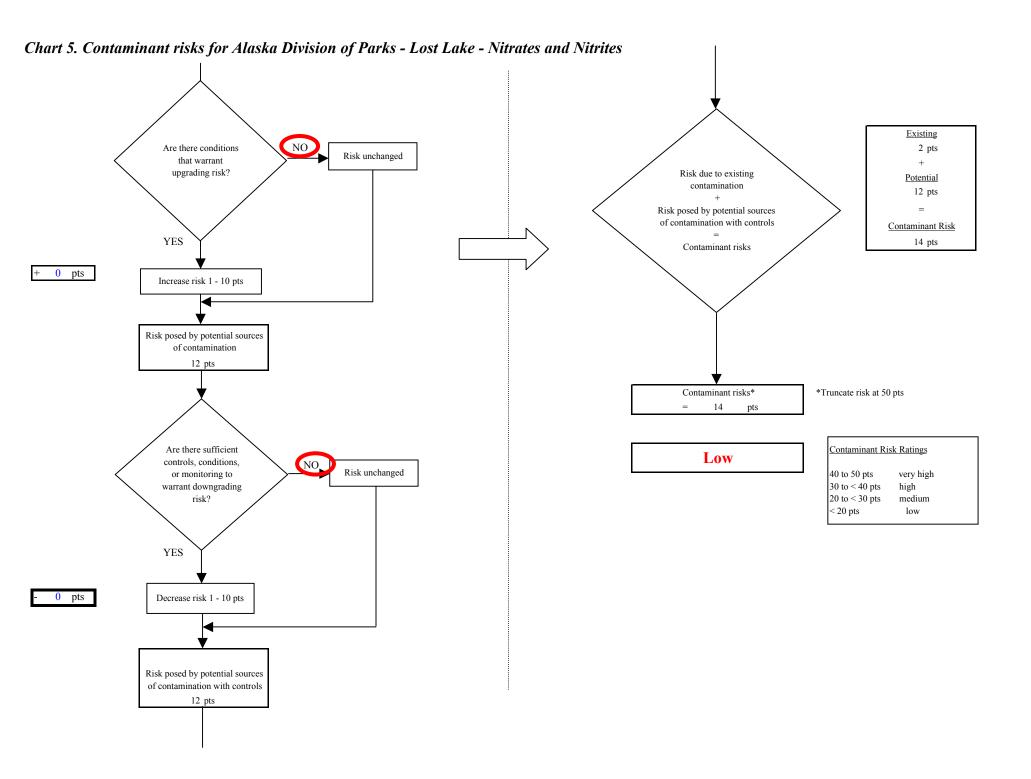


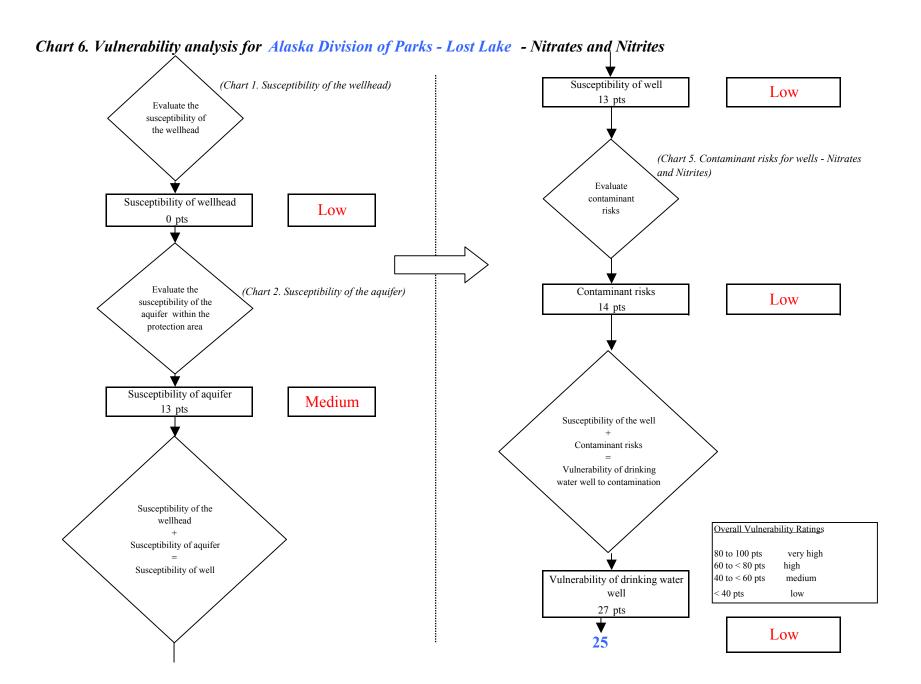

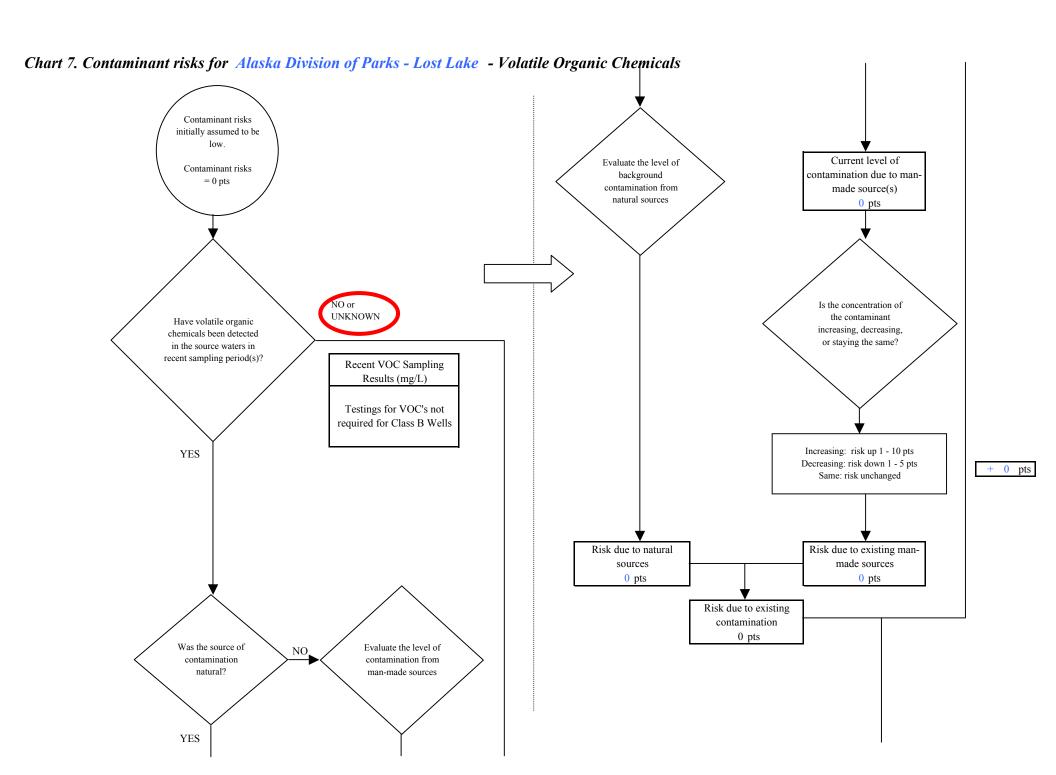

Page 10 of 13



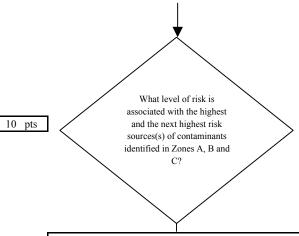



Risk Levels for Contaminant Sources identified in Zones A, B and C			
	Zone A	Zones B&C	Total
Very Highs(s)	0	0	0
High(s)	0	0	0
Medium(s)	0	0	0
Low(s)	1	0	1

	LOW 10 pts	MEDIUM 20 pts	HIGH 30 pts	VERY HIGH 40 pts
LOW	≥ 10 sources + 10 pts	≥ 10 sources + 5 pts	≥ 20 sources + 5 pts	
MEDIUM		≥ 2 sources + 5 pts	≥ 5 sources + 5 pts	≥ 10 sources + 5 pts
HIGH			≥ 1 source + 10 pts	≥ 2 sources + 10 pts
VERY HIGH				≥ 1 source + 10 pts

Matrix Score 10

Note: Septic systems, sewerlines, and roads are each assigned a risk ranking for each individual contaminant source in the CSI. The VA, however, counts these contaminant sources as a group and assigns a calculated number of either "lows" or "mediums" based on the density.

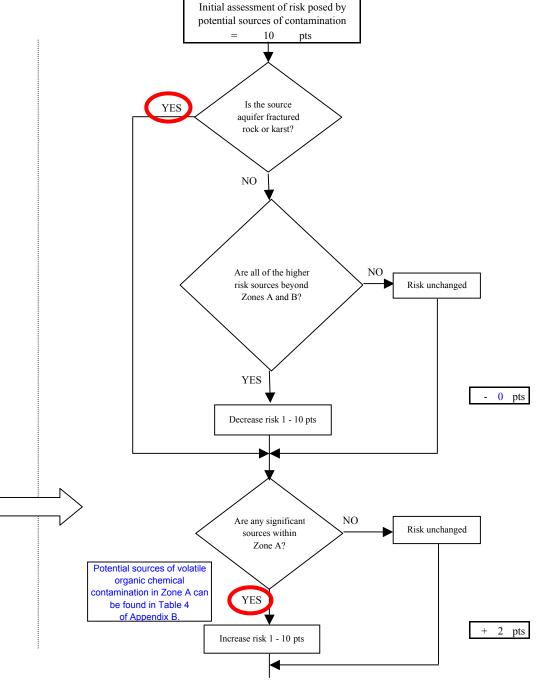

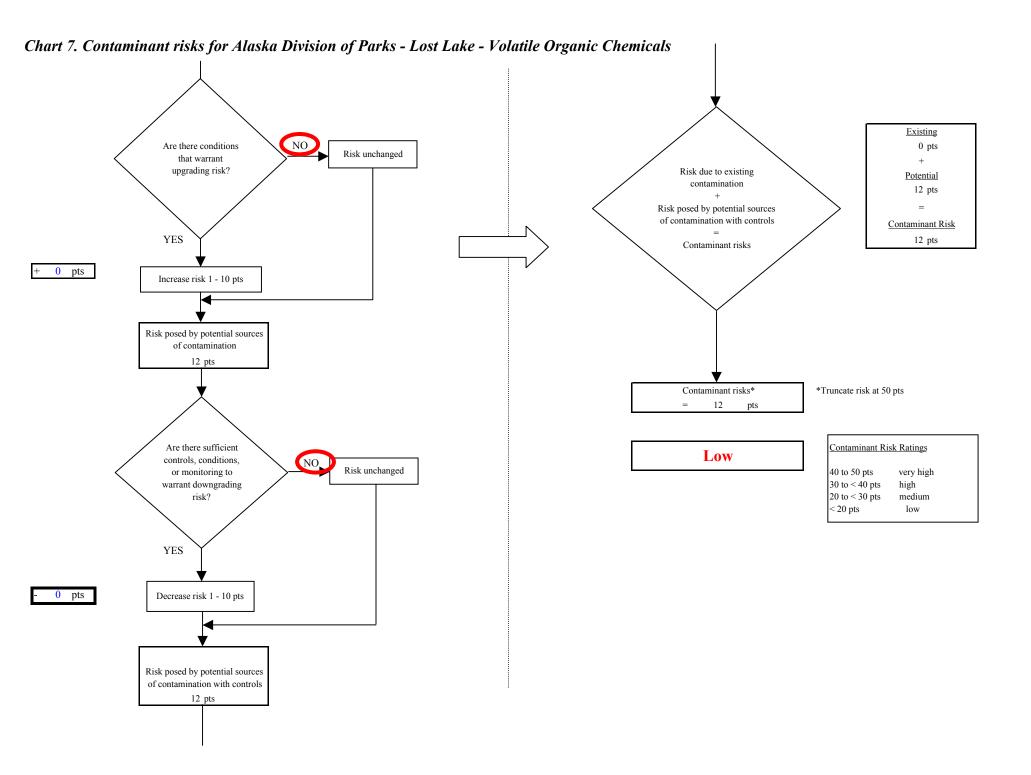

Page 12 of 13

